

ATTACHMENT 1

PROJECT SUMMARY

Applicant/Contact Person: Randy Rossi

Address: 7505 Grizzly Flat Road, Somerset, Ca. 95684

Phone: (530) 626-0800 (Business), Cell (530) 957-2528

Email: randy@saluticellars.com

Project Description

Install an electric vehicle charging station (Level 2 EVSE) at the tasting room parking lot for Saluti Cellars Winery/ B and B. The charger is proposed to be located at the parking space closest to the tasting room thus available for use by both handicap and regular guests. It will be made available during tasting room operations (Friday-Sunday from 11:30-5:30) and anytime we are open for B and B and wedding guests. Our tasting room parking lot is visited by approximately 500 vehicles per month, on average, (wine tasting, Band B guests and events).

(map attached)

Match Commitment and Acknowledgement:

By signing below the applicant acknowledges that if the proposal is awarded, the contract will require compliance with match and acknowledgement requirements.

Applicant  Date 4/20/2017

Randy Rossi, Applicant/Owner

Funding Request Cost Breakdown

Materials/supplies and permit (see estimates for detail): 40
amp breaker, 240' 1" conduit, 960' #8 copper wire, 10'
unistrut, permit fee \$1490

Equipment: Clipper Creek HCS-40, 32 AMP LEVEL2 EVSC
240VAC with 25' cable \$750


Labor: 16 hours @\$100/hour \$1600

The costs reflect the lowest bid.

SHLV 11 777777



MAP

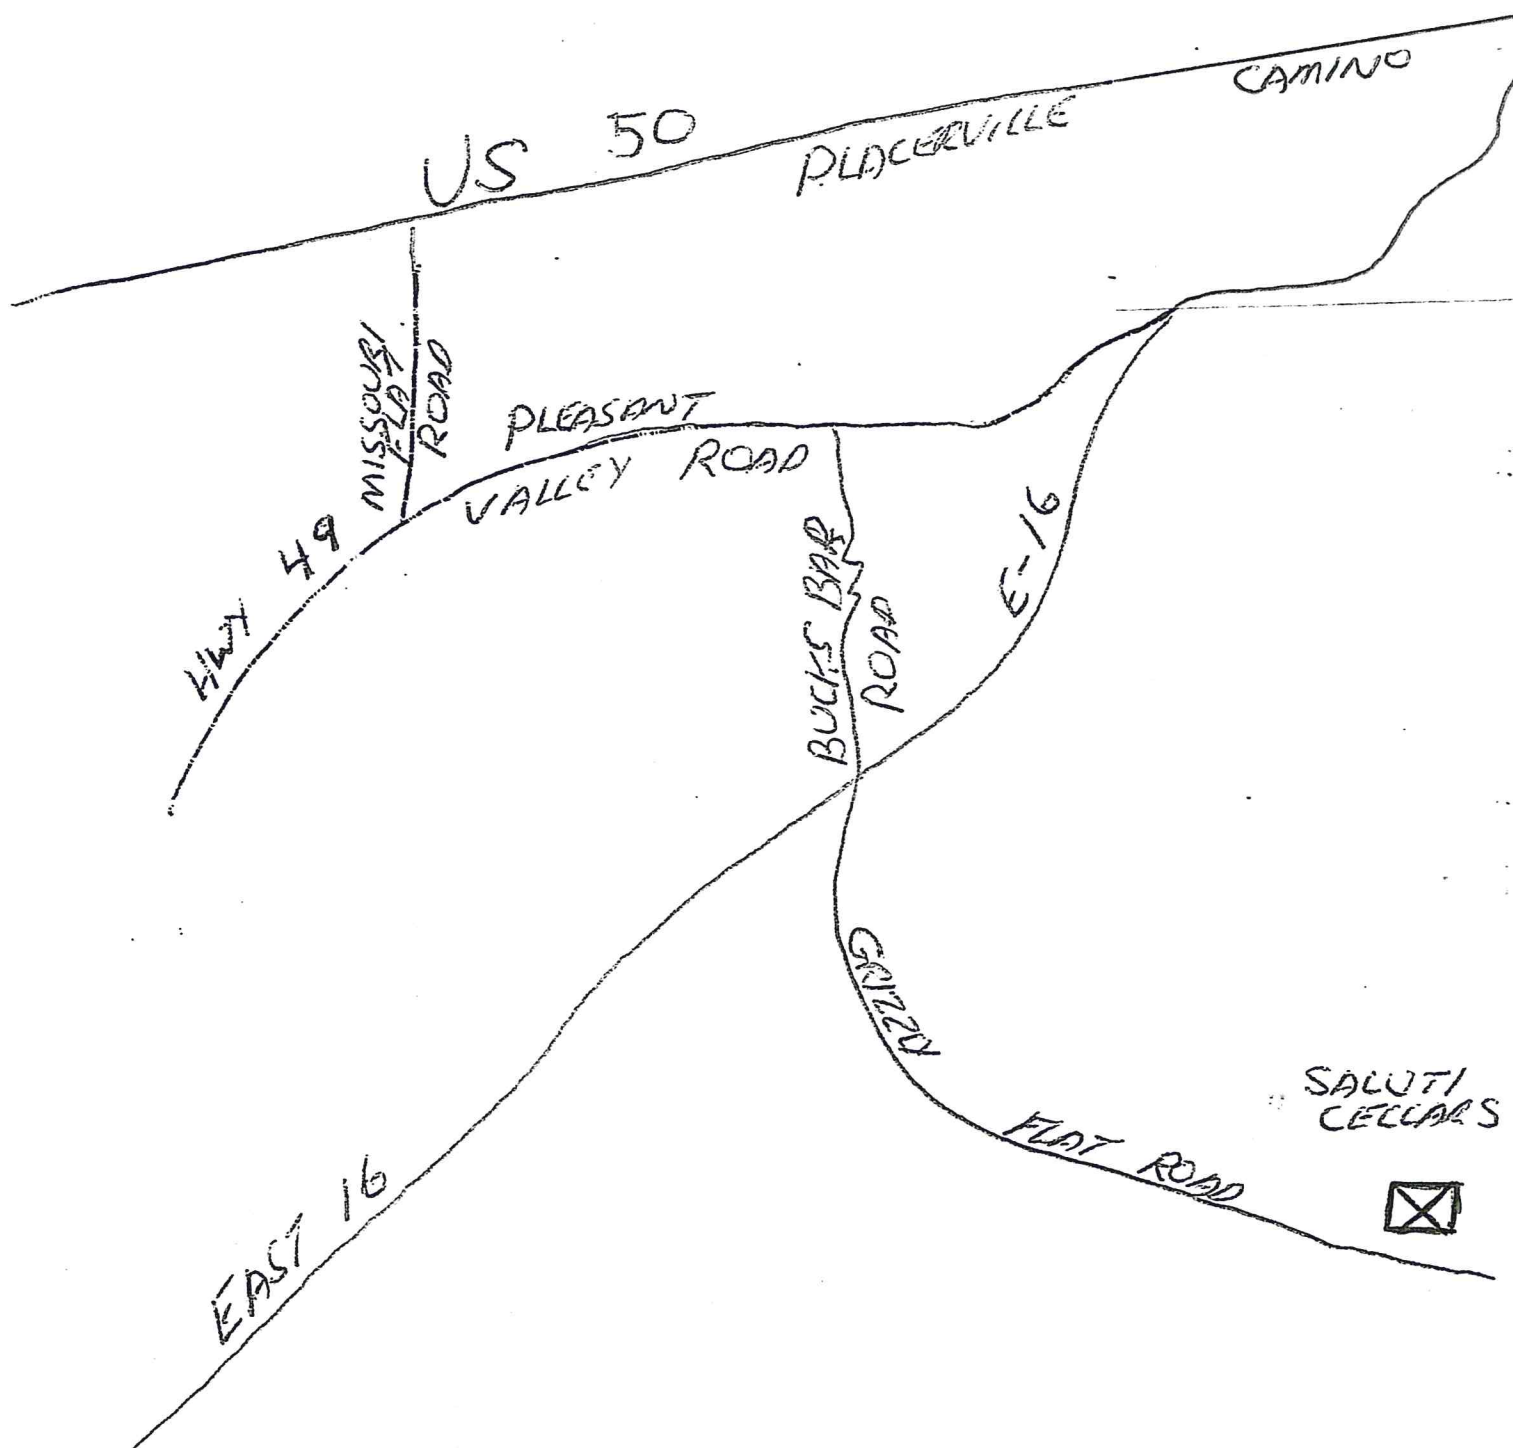

SALUTI CELLARS
7505 GRIZZLY FLAT ROAD
SOMERSET, CA, 95684
(530) 626-0800

EILHARDT ELECTRIC

"We Know Electricity.....down to the wire "

Lic # 824458

2401 Loma Cima Drive
Placerville CA 95667

Phone: 530-642-8643

Phone: 916-351-1988

Fax: 530-642-8643

Email: customerservice@eilhardtelectric.com

Web: www.EilhardtElectric.com

Estimate

No: 2265
Date: 4/3/2017

Customer

SALUTI CELLARS
7505 GRIZZLY FLAT ROAD
SOMERSET CA 95684
530-957-2528 RANDY@SALUTICELLARS.COM

Project Location

SAME

Code	Description	Qty/Hours	Rate	Amount
	PROVIDE, CUT-IN, AND INSTALL: (1) NEW CLIPPER CREEK HCS-40 32AMP LEVEL 2 EVSE ELECTRIC VEHICLE CHARGING STATION, CONDUIT, CONDUCTORS, (1) 2-POLE 40AMP CIRCUIT BREAKER AT EXISTING 400AMP METERED MAIN SERVICE PANEL. 240' TRENCH ALL PULLING, TERMINATING FOR A COMPLETE AND TESTED SYSTEM.	1.00	\$3,840.00	\$3,840.00*

FUNDING REQUEST COST BREAKDOWN

MATERIAL AND SUPPLIES: \$1490

- (1) 40AMP 2-POLE C/B
- (240') 1"PVC CONDUIT
- (960') #8 THHN COPPER WIRE
- (10') 1 5/8" UNISTRUT
- (1) PERMIT FEE

EQUIPMENT: \$750

- (1) CLIPPER CREEK HCS-40 32AMP LEVEL 2 EVSE 240VAC

LABOR: \$1600

- (16) HOURS OF LABOR @ \$100/HOUR

* Indicates non-taxable item

Subtotal \$3,840.00

Total \$3,840.00