



COMMUNITY DEVELOPMENT AGENCY

TRANSPORTATION DIVISION

<http://www.edcgov.us/DOT/>

PLACERVILLE OFFICES:

MAIN OFFICE:

2850 Fairlane Court, Placerville, CA 95667
(530) 621-5900 / (530) 626-0387 Fax

CONSTRUCTION & MAINTENANCE:

2441 Headington Road, Placerville, CA 95667
(530) 642-4909 / (530) 642-0508 Fax

LAKE TAHOE OFFICES:

ENGINEERING:

924 B Emerald Bay Road, South Lake Tahoe, CA 96150
(530) 573-7900 / (530) 541-7049 Fax

MAINTENANCE:

1121 Shakori Drive, South Lake Tahoe, CA 96150
(530) 573-3180 / (530) 577-8402 Fax

DATE: October 8, 2014

TO: All Prospective Bidders

SUBJECT: **Addendum No. 1**
Francisco Drive Right-turn Pocket Project
Contract No. PW 14-31068, Project No. 71358

Submit proposals for this work with the understanding and full consideration of this addendum. The revisions declared in this addendum are essential parts of the Contract.

ITEM NO.	LOCATION, PAGE, OR DRAWING NO.	DESCRIPTION OF CHANGE
1.01	N-5	Replace the email address under "Project Administration" with Jennifer.Rimoldi@edcgov.us
1.02	SP-51	<p>Delete the following:</p> <p style="text-align: center;">Replace "Reserved" of Section 39-1.40 with:</p> <p>39-1.40 Place Hot Mix Asphalt (Curb Ramp)</p> <p>You must produce and place Type A HMA curb ramp as shown.</p> <p>Prepare the area to receive HMA curb ramp including excavation and backfill as needed.</p> <p>You must use ¾ inch gradation for HMA Type A (curb ramp).</p> <p>The grade of asphalt binder for Type A HMA (curb ramp) must be PG-64-16 or the same grade specified for Type A HMA.</p> <p style="text-align: center;">Add to Section 39-6 with:</p> <p>Payment for tack coat for HMA (Curb Ramp) and HMA (Type A) is included in the payment for the type of work involved.</p> <p>Place HMA (Curb Ramp) is measured per each.</p>

Latrobe Road Gabion Wall Retrofit
Contract No. PW 14-31074, CIP No. 48145
Addendum No. 1

County of El Dorado
Page 1

ITEM NO.	LOCATION, PAGE, OR DRAWING NO.	DESCRIPTION OF CHANGE
1.03	SP-52	<p>Add the following to page SP-52 under “DIVISION VIII MISCELLANEOUS CONSTRUCTION”:</p> <p style="text-align: center;">73 CONCRETE CURBS AND SIDEWALKS</p> <p style="text-align: center;">Replace section 73-1.01A with:</p> <p>Section 73-1 includes general specifications for constructing minor concrete items including concrete dike, curb ramp, and detectable warning surface.</p> <p style="text-align: center;">Replace section 73-1.04 with:</p> <p>Furnishing and installing concrete dike (Type A), concrete curb ramp, and curb ramp detectable warning surfaces is included in the payment for “Minor Concrete (Curb & Curb Ramp)”.</p> <p style="text-align: center;">Replace section 73-2.01A with:</p> <p>Section 73-2 includes specifications for constructing concrete dike.</p> <p style="text-align: center;">Replace section 73-3.01A with:</p> <p>Section 73-3 includes specifications for constructing curbs ramps and detectable warning surfaces.</p>
1.04	AB-1 through AB-44	The Federal Wage Rates have been updated. Bidders are instructed to replace pages AB-1 through AB-44 with the attached AB-1 rev through AB-53 rev.
1.05	C-11 through C-13	The Contractor’s Bid and Bid Price Schedule has been updated. Bidders are instructed to replace pages C-11 through C-13 with the attached C-11 rev through C-13 rev.
1.06	P-3 through P-5	The Proposal Pay Items and Bid Price Schedule has been updated. Bidders are instructed to replace pages P-3 through P-5 with the attached P-3 rev through P-5 rev.
1.07	Plan Sheets L-1, C-1, SPD-1, SPD-2, SPD-3	Bidders are instructed to replace Plan sheets L-1 (5), C-1 (11), SPD-1 (16), SPD-2 (17), and SPD-3 (18) with the revised Plan sheets L-1r (5), C-1r (11), SPD-1r (16), SPD-2r (17), and SPD-3r (18) attached to this Addendum.

Indicate receipt of this addendum by filling in the number of this addendum in the space provided on the signature page of the proposal.

Holders who have already mailed their proposal can contact Jennifer Rimoldi at 530-621-7592 (email: Jennifer.Rimoldi@edcgov.us) to arrange return of their proposal.


Inform all suppliers and subcontractors as necessary.

The Community Development Agency, Transportation Division is only sending this addendum by posting on the following website:

<http://www.edcgov.us/Government/DOT/Bids.aspx>.

If you are not a Contract Documents Holder, but request a set of documents to bid on this project, you must comply with the requirements of this addendum when submitting your bid.

End of Addendum No. 1



Recommended by:
Matthew D. Smeltzer, P.E.
Deputy Director, Fairlane Unit

10/8/14
Date



Approved by:
Steven M. Pedretti
Community Development Agency Director

10/8/14
Date

General Decision Number: CA140009 10/03/2014 CA9

Superseded General Decision Number: CA20130009

State: California

Construction Types: Building, Heavy (Heavy and Dredging) and Highway

Counties: Alpine, Amador, Butte, Colusa, El Dorado, Glenn, Lassen, Marin, Modoc, Napa, Nevada, Placer, Plumas, Sacramento, Shasta, Sierra, Siskiyou, Solano, Sonoma, Sutter, Tehama, Trinity, Yolo and Yuba Counties in California.

BUILDING CONSTRUCTION PROJECTS (excluding Amador County only);
DREDGING CONSTRUCTION PROJECTS (does not include hopper dredge work); HEAVY CONSTRUCTION PROJECTS (does not include water well drilling); AND HIGHWAY CONSTRUCTION PROJECTS

Modification Number Publication Date

0	01/03/2014
1	01/10/2014
2	01/24/2014
3	03/07/2014
4	04/11/2014
5	05/23/2014
6	05/30/2014
7	06/06/2014
8	06/13/2014
9	06/20/2014
10	07/04/2014
11	07/11/2014
12	07/18/2014
13	07/25/2014
14	08/01/2014
15	08/08/2014
16	08/15/2014
17	08/22/2014
18	09/05/2014
19	09/26/2014
20	10/03/2014

ASBE0016-001 01/01/2014

AREA 1: ALAMEDA, CONTRA COSTA, LAKE, MARIN, MENDOCINO,

MONTEREY, NAPA, SAN BENITO, SAN FRANCISCO, SAN MATEO, SANTA CLARA, SANTA CRUZ, SOLANO, & SONOMA COUNTIES

AREA 2: ALPINE, AMADOR, BUTTE, CALAVERAS, COLUSA, DEL NORTE, EL DORADO, FRESNO, GLENN, HUMBOLDT, KINGS, LASSEN, MADERA, MARIPOSA, MERCED, MODOC, MONO, NEVADA, PLACER, PLUMAS, SACRAMENTO, SAN JOAQUIN, SHASTA, SIERRA, SISKIYOU, STANISLAU, SUTTER, TEHEMA, TRINITY, TULARE, TUOLUMNE, YOLO, & YUBA COUNTIES

	Rates	Fringes
Asbestos Workers/Insulator (Includes the application of all insulating materials, Protective Coverings, Coatings, and Finishes to all types of mechanical systems)		
Area 1.....	\$ 57.15	18.72
Area 2.....	\$ 44.05	18.62

ASBE0016-007 01/01/2013		

	Rates	Fringes
Asbestos Removal worker/hazardous material handler (Includes preparation, wetting, stripping, removal, scrapping, vacuuming, bagging and disposing of all insulation materials from mechanical systems, whether they contain asbestos or not)....	\$ 31.13	6.95

BOIL0549-002 01/01/2013		

	Rates	Fringes
BOILERMAKER		
(1) Marin & Solano Counties.	\$ 42.06	33.43
(2) Remaining Counties.....	\$ 38.37	31.32

BRCA0003-001 08/01/2013		

	Rates	Fringes
--	-------	---------

MARBLE FINISHER.....\$ 28.05 14.01

BRCA0003-004 05/01/2013

AREA 1: ALPINE, AMADOR, BUTTE, COLUSA, EL DORADO, GLENN,
LASSEN, MODOC, NEVADA, PLACER, PLUMAS, SACRAMENTO, SHASTA,
SIERRA, SUTTER, TEHAMA, YOLO AND YUBA COUNTIES

AREA 2: MARIN, NAPA, SISKIYOU, SOLANO, SONOMA AND TRINITY
COUNTIES

Rates Fringes

BRICKLAYER

AREA 1.....\$ 36.48 19.59
AREA 2.....\$ 39.96 23.79

SPECIALTY PAY:

- (A) Underground work such as tunnel work, sewer work, manholes, catch basins, sewer pipes and telephone conduit shall be paid \$1.25 per hour above the regular rate. Work in direct contact with raw sewage shall receive \$1.25 per hour in addition to the above.
- (B) Operating a saw or grinder shall receive \$1.25 per hour above the regular rate.
- (C) Guniting nozzle person shall receive \$1.25 per hour above the regular rate.

BRCA0003-008 07/01/2013

Rates Fringes

TERRAZZO FINISHER.....\$ 33.15 13.93
TERRAZZO WORKER/SETTER.....\$ 39.95 24.39

BRCA0003-010 04/01/2014

Rates Fringes

TILE FINISHER

Area 1.....\$ 22.58 10.04
Area 2.....\$ 22.58 12.50
Area 3.....\$ 22.76 12.37
Area 4.....\$ 22.26 11.85

Tile Layer

Area 1.....\$ 38.13 11.98

Area 2.....	\$ 36.43	13.74
Area 3.....	\$ 40.59	13.79
Area 4.....	\$ 37.46	13.74

AREA 1: Butte, Colusa, El Dorado, Glenn, Lassen, Modoc, Nevada, Placer, Plumas, Sacramento, Shasta, Sierra, Sutter, Tehema, Yolo, Yuba

AREA 2: Alpine, Amador

AREA 3: Marin, Napa, Solano, Siskiyou

AREA 4: Sonoma

BRCA0003-014 08/01/2013

	Rates	Fringes
MARBLE MASON.....	\$ 39.30	22.48

CARP0034-001 07/01/2014

	Rates	Fringes
Diver		
Assistant Tender, ROV		
Tender/Technician.....	\$ 39.60	30.73
Diver standby.....	\$ 44.56	30.73
Diver Tender.....	\$ 43.56	30.73
Diver wet.....	\$ 89.12	30.73
Manifold Operator (mixed gas).....	\$ 48.56	30.73
Manifold Operator (Standby).....	\$ 43.56	30.73

DEPTH PAY (Surface Diving):

050 to 100 ft \$2.00 per foot

101 to 150 ft \$3.00 per foot

151 to 220 ft \$4.00 per foot

SATURATION DIVING:

The standby rate shall apply until saturation starts. The saturation diving rate applies when divers are under pressure continuously until work task and decompression are complete. The diver rate shall be paid for all saturation hours.

DIVING IN ENCLOSURES:

Where it is necessary for Divers to enter pipes or tunnels, or other enclosures where there is no vertical ascent, the following premium shall be paid: Distance traveled from

entrance 26 feet to 300 feet: \$1.00 per foot. When it is necessary for a diver to enter any pipe, tunnel or other enclosure less than 48" in height, the premium will be \$1.00 per foot.

WORK IN COMBINATION OF CLASSIFICATIONS:

Employees working in any combination of classifications within the diving crew (except dive supervisor) in a shift are paid in the classification with the highest rate for that shift.

 CARP0034-003 07/01/2014

	Rates	Fringes
Piledriver.....	\$ 40.60	30.73

CARP0035-001 08/01/2014

AREA 1: MARIN, NAPA, SOLANO & SONOMA

AREA 3: SACRAMENTO, WESTERN EL DORADO (Territory west of an including highway 49 and the territory inside the city limits of Placerville), WESTERN PLACER (Territory west of and including highway 49), & YOLO

AREA 4: ALPINE, BUTTE, COLUSA, EASTERN EL DORADO, GLENN, LASSEN, MODOC, NEVADA, EASTERN PLACER, PLUMAS, SHASTA, SIERRA, SISKIYOU, SUTTER, TEHAMA, TRINITY, & YUBA

	Rates	Fringes
Drywall Installers/Lathers:		
Area 1.....	\$ 40.35	27.97
Area 3.....	\$ 34.97	27.97
Area 4.....	\$ 33.62	27.97
Drywall Stocker/Scrapper		
Area 1.....	\$ 20.18	16.30
Area 3.....	\$ 17.49	16.30
Area 4.....	\$ 16.81	16.30

CARP0035-009 07/01/2014

Marin County

Rates	Fringes
-------	---------

CARPENTER

Bridge Builder/Highway Carpenter.....	\$ 40.35	27.53
Hardwood Floorlayer, Shingler, Power Saw Operator, Steel Scaffold & Steel Shoring Erector, Saw Filer.....	\$ 40.50	27.53
Journeyman Carpenter.....	\$ 40.35	27.53
Millwright.....	\$ 40.45	29.12

* CARP0035-010 07/01/2014

AREA 1: Marin, Napa, Solano & Sonoma Counties

AREA 2: Monterey, San Benito and Santa Cruz

AREA 3: Alpine, Butte, Colusa, El Dorado, Glenn, Lassen, Modoc,
Nevada, Placer, Plumas, Sacramento, Shasta, Sierra, Siskiyou,
Sutter, Tehama, Trinity, Yolo & Yuba counties

Rates Fringes

Modular Furniture Installer

Area 1		
Installer I.....	\$ 23.36	18.31
Installer II.....	\$ 19.93	18.31
Lead Installer.....	\$ 26.81	18.81
Master Installer.....	\$ 31.03	18.81
Area 2		
Installer I.....	\$ 20.71	18.31
Installer II.....	\$ 17.76	18.31
Lead Installer.....	\$ 23.68	18.81
Master Installer.....	\$ 27.31	18.81
Area 3		
Installer I.....	\$ 19.76	18.31
Installer II.....	\$ 16.99	18.31
Lead Installer.....	\$ 22.56	18.81
Master Installer.....	\$ 29.58	18.81

CARP0046-001 07/01/2014

El Dorado (West), Placer (West), Sacramento and Yolo Counties

Rates Fringes

Carpenters

Bridge Builder/Highway Carpenter.....	\$ 40.35	27.53
Hardwood Floorlayer, Shingler, Power Saw Operator, Steel Scaffold & Steel Shoring Erector, Saw Filer.....	\$ 34.62	27.53
Journeyman Carpenter.....	\$ 34.47	27.53
Millwright.....	\$ 36.97	29.12

Footnote: Placer County (West) includes territory West of and including Highway 49 and El Dorado County (West) includes territory West of and including Highway 49 and territory inside the city limits of Placerville.

CARP0046-002 07/01/2014

Alpine, Colusa, El Dorado (East), Nevada, Placer (East),
Sierra, Sutter and Yuba Counties

Rates Fringes

Carpenters

Bridge Builder/Highway Carpenter.....	\$ 40.35	27.53
Hardwood Floorlayer, Shingler, Power Saw Operator, Steel Scaffold & Steel Shoring Erector, Saw Filer.....	\$ 33.27	27.53
Journeyman Carpenter.....	\$ 33.12	27.53
Millwright.....	\$ 35.62	29.12

CARP0152-003 07/01/2014

Amador County

Rates Fringes

Carpenters

Bridge Builder/Highway Carpenter.....	\$ 40.35	27.53
Hardwood Floorlayer, Shingler, Power Saw Operator, Steel Scaffold &		

Steel Shoring Erector, Saw Filer.....	\$ 33.27	27.53
Journeyman Carpenter.....	\$ 33.12	27.53
Millwright.....	\$ 35.62	29.12

CARP0180-001 07/01/2014

Solano County

	Rates	Fringes
Carpenters		
Bridge Builder/Highway Carpenter.....	\$ 40.35	27.53
Hardwood Floorlayer, Shingler, Power Saw Operator, Steel Scaffold & Steel Shoring Erector, Saw Filer.....	\$ 40.50	27.53
Journeyman Carpenter.....	\$ 40.35	27.53
Millwright.....	\$ 40.45	29.12

CARP0751-001 07/01/2014

Napa and Sonoma Counties

	Rates	Fringes
Carpenters		
Bridge Builder/Highway Carpenter.....	\$ 40.35	27.53
Hardwood Floorlayer, Shingler, Power Saw Operator, Steel Scaffold & Steel Shoring Erector, Saw Filer.....	\$ 40.50	27.53
Journeyman Carpenter.....	\$ 40.35	27.53
Millwright.....	\$ 40.45	29.12

CARP1599-001 07/01/2014

Butte, Glenn, Lassen, Modoc, Plumas, Shasta, Siskiyou, Tehama
and Trinity Counties

	Rates	Fringes
Carpenters		

Bridge Builder/Highway Carpenter.....	\$ 40.35	27.53
Hardwood Floorlayer, Shingler, Power Saw Operator, Steel Scaffold & Steel Shoring Erector, Saw Filer.....	\$ 33.27	27.53
Journeyman Carpenter.....	\$ 33.12	27.53
Millwright.....	\$ 35.62	29.12

ELEC0180-001 06/01/2014

NAPA AND SOLANO COUNTIES

	Rates	Fringes
CABLE SPLICER.....	\$ 50.97	3%+20.13
ELECTRICIAN.....	\$ 45.31	3%+20.13

ELEC0180-003 12/01/2013

NAPA AND SOLANO COUNTIES

	Rates	Fringes
Sound & Communications Installer.....	\$ 31.32	3%+15.30
Technician.....	\$ 35.66	3%+15.30

SCOPE OF WORK INCLUDES-

SOUND & VOICE TRANSMISSION (Music, Intercom, Nurse Call, Telephone); FIRE ALARM SYSTEMS [excluding fire alarm work when installed in raceways (including wire and cable pulling) and when performed on new or major remodel building projects or jobs], TELEVISION & VIDEO SYSTEMS, SECURITY SYSTEMS, COMMUNICATIONS SYSTEMS that transmit or receive information and/or control systems that are intrinsic to the above.

EXCLUDES-

Excludes all other data systems or multiple systems which include control function or power supply; excludes installation of raceway systems, line voltage work, industrial work, life-safety systems (all buildings having floors located more than 75' above the lowest floor level having building access); excludes energy management systems.

ELEC0340-002 12/01/2013

ALPINE, AMADOR, BUTTE, COLUSA, EL DORADO, GLENN, LASSEN,
NEVADA, PLACER, PLUMAS, SACRAMENTO, TRINITY, YOLO, YUBA COUNTIES

	Rates	Fringes
Communications System		
Sound & Communications		
Installer.....	\$ 24.68	3%+12.85
Sound & Communications		
Technician.....	\$ 28.38	3%+12.85

SCOPE OF WORK

Includes the installation testing, service and maintenance, of the following systems which utilize the transmission and/or transference of voice, sound, vision and digital for commercial, education, security and entertainment purposes for the following TV monitoring and surveillance, background-foreground music, intercom and telephone interconnect, inventory control systems, microwave transmission, multi-media, multiplex, nurse call system, radio page, school intercom and sound, burglar alarms, and low voltage master clock systems.

A. SOUND AND VOICE TRANSMISSION/TRANSFERENCE SYSTEMS

Background foreground music Intercom and telephone interconnect systems, Telephone systems, Nurse call systems, Radio page systems, School intercom and sound systems, Burglar alarm systems, Low voltage master clock systems, Multi-media/multiplex systems, Sound and musical entertainment systems, RF systems, Antennas and Wave Guide.

B. FIRE ALARM SYSTEMS

Installation, wire pulling and testing

C. TELEVISION AND VIDEO SYSTEMS Television monitoring and surveillance systems, Video security systems, Video entertainment systems, Video educational systems, Microwave transmission systems, CATV and CCTV

D. SECURITY SYSTEMS Perimeter security systems
Vibration sensor systems Card access systems Access control systems Sonar/infrared monitoring equipment

E. COMMUNICATIONS SYSTEMS THAT TRANSMIT OR RECEIVE INFORMATION AND/OR CONTROL SYSTEMS THAT ARE INTRINSIC TO THE ABOVE LISTED SYSTEMS SCADA (Supervisory Control and Data Acquisition) PCM (Pulse Code Modulation) Inventory Control Systems Digital Data Systems Broadband and Baseband and Carriers Point of Sale Systems VSAT Data Systems Data Communication Systems RF and Remote Control Systems Fiber Optic Data Systems WORK EXCLUDED Raceway systems are not covered (excluding Ladder-Rack for the purpose of the above listed systems). Chases and/or nipples (not to exceed 10 feet) may be installed on open wiring systems. Energy management systems. SCADA (Supervisory Control and Data Acquisition) when not intrinsic to the above listed systems (in the scope). Fire alarm systems when installed in raceways (including wire and cable pulling) shall be performed at the electrician wage rate, when either of the following two (2) conditions apply:

1. The project involves new or major remodel building trades construction.
2. The conductors for the fire alarm system are installed in conduit.

 ELEC0340-003 12/01/2013

ALPINE (West of Sierra Mt. Watershed), AMADOR, BUTTE, COLUSA, EL DORADO (West of Sierra Mt. Watershed), GLENN, LASSEN, NEVADA (West of Sierra Mt. Watershed), PLACER, PLUMAS, SACRAMENTO, SHASTA, SIERRA (West of Sierra Mt. Watershed), SUTTER, TEHAMA, TRINITY, YOLO & YUBA COUNTIES

Rates Fringes

ELECTRICIAN

Remaining area.....	\$ 39.06	18.54
Sierra Army Depot, Herlong..	\$ 48.83	18.54
Tunnel work.....	\$ 41.01	18.54

CABLE SPLICER: Receives 110% of the Electrician basic hourly rate.

 ELEC0401-005 07/01/2013

ALPINE (east of the main watershed divide), EL DORADO (east of the main watershed divide), NEVADA (east of the main

watershed), PLACER (east of the main watershed divide) and SIERRA (east of the main watershed divide) COUNTIES:

	Rates	Fringes
ELECTRICIAN.....	\$ 37.00	14.62

ELEC0551-004 06/01/2014		

MARIN AND SONOMA COUNTIES

	Rates	Fringes
ELECTRICIAN.....	\$ 47.20	16.76

ELEC0551-005 12/01/2013		

MARIN & SONOMA COUNTIES

	Rates	Fringes
Sound & Communications		
Installer.....	\$ 31.32	16.23
Technician.....	\$ 35.66	16.36

SCOPE OF WORK INCLUDES-

SOUND & VOICE TRANSMISSION (Music, Intercom, Nurse Call, Telephone); FIRE ALARM SYSTEMS [excluding fire alarm work when installed in raceways (including wire and cable pulling) and when performed on new or major remodel building projects or jobs], TELEVISION & VIDEO SYSTEMS, SECURITY SYSTEMS, COMMUNICATIONS SYSTEMS that transmit or receive information and/or control systems that are intrinsic to the above.

EXCLUDES-

Excludes all other data systems or multiple systems which include control function or power supply; excludes installation of raceway systems, line voltage work, industrial work, life-safety systems (all buildings having floors located more than 75' above the lowest floor level having building access); excludes energy management systems.

ELEC0659-006 01/01/2013

DEL NORTE, MODOC and SISKIYOU COUNTIES

	Rates	Fringes
ELECTRICIAN.....	\$ 30.27	14.81

ELEC0659-008 02/01/2013		

DEL NORTE, MODOC & SISKIYOU COUNTIES

	Rates	Fringes
Line Construction		
(1) Cable Splicer.....	\$ 51.09	4%+13.30
(2) Lineman, Pole Sprayer, Heavy Line Equipment Man....	\$ 45.62	4%+13.30
(3) Tree Trimmer.....	\$ 32.07	4%+9.80
(4) Line Equipment Man.....	\$ 45.62	4%+9.80
(5) Powdermen, Jackhammermen.....	\$ 34.22	4%+9.80
(6) Groundman.....	\$ 31.31	4%+9.80

ELEC1245-004 06/01/2013		

ALL COUNTIES EXCEPT DEL NORTE, MODOC & SISKIYOU

	Rates	Fringes
LINE CONSTRUCTION		
(1) Lineman; Cable splicer..	\$ 50.30	15
(2) Equipment specialist (operates crawler tractors, commercial motor vehicles, backhoes, trenchers, cranes (50 tons and below), overhead & underground distribution line equipment).....	\$ 40.17	14.56
(3) Groundman.....	\$ 30.73	13.48
(4) Powderman.....	\$ 44.91	13.48

HOLIDAYS: New Year's Day, M.L. King Day, Memorial Day,
Independence Day, Labor Day, Veterans Day, Thanksgiving Day
and day after Thanksgiving, Christmas Day

ELEV0008-001 01/01/2014

	Rates	Fringes
ELEVATOR MECHANIC.....	\$ 59.19	26.785

FOOTNOTE:

PAID VACATION: Employer contributes 8% of regular hourly rate as vacation pay credit for employees with more than 5 years of service, and 6% for 6 months to 5 years of service.

PAID HOLIDAYS: New Years Day, Memorial Day, Independence Day, Labor Day, Veterans Day, Thanksgiving Day, Friday after Thanksgiving, and Christmas Day.

 ENGI0003-008 07/01/2013

	Rates	Fringes
Dredging: (DREDGING: CLAMSHELL & DIPPER DREDGING; HYDRAULIC SUCTION DREDGING:)		
AREA 1:		
(1) Leverman.....	\$ 40.53	27.81
(2) Dredge Dozer; Heavy duty repairman.....	\$ 35.57	27.81
(3) Booster Pump Operator; Deck Engineer; Deck mate; Dredge Tender; Winch Operator.....	\$ 34.45	27.81
(4) Bargeman; Deckhand; Fireman; Leveehand; Oiler..	\$ 31.15	27.81
AREA 2:		
(1) Leverman.....	\$ 42.53	27.81
(2) Dredge Dozer; Heavy duty repairman.....	\$ 37.57	27.81
(3) Booster Pump Operator; Deck Engineer; Deck mate; Dredge Tender; Winch Operator.....	\$ 36.45	27.81
(4) Bargeman; Deckhand; Fireman; Leveehand; Oiler..	\$ 33.15	27.81

AREA DESCRIPTIONS

AREA 1: ALAMEDA,BUTTE, CONTRA COSTA, KINGS, MARIN, MERCED,
 NAPA, SACRAMENTO, SAN BENITO, SAN FRANCISCO, SAN JOAQUIN,
 SAN MATEO, SANTA CLARA, SANTA CRUZ, SOLANO, STANISLAUS,

SUTTER, YOLO, AND YUBA COUNTIES

AREA 2: MODOC COUNTY

THE REMAINING COUNTIES ARE SPLIT BETWEEN AREA 1 AND AREA 2
AS NOTED BELOW:

ALPINE COUNTY:

Area 1: Northernmost part

Area 2: Remainder

CALAVERAS COUNTY:

Area 1: Remainder

Area 2: Eastern part

COLUSA COUNTY:

Area 1: Eastern part

Area 2: Remainder

ELDORADO COUNTY:

Area 1: North Central part

Area 2: Remainder

FRESNO COUNTY:

Area 1: Remainder

Area 2: Eastern part

GLENN COUNTY:

Area 1: Eastern part

Area 2: Remainder

LASSEN COUNTY:

Area 1: Western part along the Southern portion of border
with Shasta County

Area 2: Remainder

MADERA COUNTY:

Area 1: Except Eastern part

Area 2: Eastern part

MARIPOSA COUNTY

Area 1: Except Eastern part

Area 2: Eastern part

MONTERREY COUNTY

Area 1: Except Southwestern part

Area 2: Southwestern part

NEVADA COUNTY:

Area 1: All but the Northern portion along the border of
Sierra County

Area 2: Remainder

PLACER COUNTY:

Area 1: All but the Central portion

Area 2: Remainder

PLUMAS COUNTY:

Area 1: Western portion

Area 2: Remainder

SHASTA COUNTY:

Area 1: All but the Northeastern corner

Area 2: Remainder

SIERRA COUNTY:

Area 1: Western part

Area 2: Remainder

SISKIYOU COUNTY:

Area 1: Central part

Area 2: Remainder

SONOMA COUNTY:

Area 1: All but the Northwestern corner

Area 2: Remainder

TEHAMA COUNTY:

Area 1: All but the Western border with Mendocino & Trinity
Counties

Area 2: Remainder

TRINITY COUNTY:

Area 1: East Central part and the Northeastern border with
Shasta County

Area 2: Remainder

TUOLUMNE COUNTY:

Area 1: Except Eastern part

Area 2: Eastern part

ENGI0003-018 06/30/2014

"AREA 1" WAGE RATES ARE LISTED BELOW

"AREA 2" RECEIVES AN ADDITIONAL \$2.00 PER HOUR ABOVE AREA 1 RATES.

SEE AREA DEFINITIONS BELOW

	Rates	Fringes
OPERATOR: Power Equipment		
(AREA 1:)		
GROUP 1.....	\$ 39.85	27.44
GROUP 2.....	\$ 38.32	27.44
GROUP 3.....	\$ 36.84	27.44
GROUP 4.....	\$ 35.46	27.44
GROUP 5.....	\$ 34.19	27.44
GROUP 6.....	\$ 32.87	27.44
GROUP 7.....	\$ 31.73	27.44
GROUP 8.....	\$ 30.59	27.44
GROUP 8-A.....	\$ 28.38	27.44
OPERATOR: Power Equipment		
(Cranes and Attachments -		
AREA 1:)		
GROUP 1		
Cranes.....	\$ 40.73	27.44
Oiler.....	\$ 33.76	27.44
Truck crane oiler.....	\$ 37.33	27.44
GROUP 2		
Cranes.....	\$ 38.97	27.44
Oiler.....	\$ 33.50	27.44
Truck crane oiler.....	\$ 37.04	27.44
GROUP 3		
Cranes.....	\$ 37.23	27.44
Hydraulic.....	\$ 32.87	27.44
Oiler.....	\$ 33.26	27.44
Truck Crane Oiler.....	\$ 36.77	27.44
GROUP 4		
Cranes.....	\$ 34.19	27.44
OPERATOR: Power Equipment		
(Piledriving - AREA 1:)		
GROUP 1		
Lifting devices.....	\$ 41.07	27.44
Oiler.....	\$ 31.81	27.44
Truck crane oiler.....	\$ 34.09	27.44
GROUP 2		
Lifting devices.....	\$ 39.25	27.44
Oiler.....	\$ 31.54	27.44
Truck Crane Oiler.....	\$ 33.84	27.44
GROUP 3		

Lifting devices.....	\$ 37.57	27.44
Oiler.....	\$ 31.32	27.44
Truck Crane Oiler.....	\$ 33.55	27.44
GROUP 4		
Lifting devices.....	\$ 35.80	27.44
GROUP 5		
Lifting devices.....	\$ 34.50	27.44
GROUP 6		
Lifting devices.....	\$ 33.16	27.44
OPERATOR: Power Equipment (Steel Erection - AREA 1:)		
GROUP 1		
Cranes.....	\$ 41.70	27.44
Oiler.....	\$ 32.15	27.44
Truck Crane Oiler.....	\$ 34.38	27.44
GROUP 2		
Cranes.....	\$ 39.93	27.44
Oiler.....	\$ 31.88	27.44
Truck Crane Oiler.....	\$ 34.16	27.44
GROUP 3		
Cranes.....	\$ 38.45	27.44
Hydraulic.....	\$ 32.67	27.44
Oiler.....	\$ 31.66	27.44
Truck Crane Oiler.....	\$ 33.89	27.44
GROUP 4		
Cranes.....	\$ 36.43	27.44
GROUP 5		
Cranes.....	\$ 35.13	27.44
OPERATOR: Power Equipment (Tunnel and Underground Work - AREA 1:)		
SHAFTS, STOPES, RAISES:		
GROUP 1.....	\$ 35.95	27.44
GROUP 1-A.....	\$ 38.32	27.44
GROUP 2.....	\$ 34.59	27.44
GROUP 3.....	\$ 33.36	27.44
GROUP 4.....	\$ 32.22	27.44
GROUP 5.....	\$ 31.08	27.44
UNDERGROUND:		
GROUP 1.....	\$ 35.85	27.44
GROUP 1-A.....	\$ 38.32	27.44
GROUP 2.....	\$ 34.59	27.44
GROUP 3.....	\$ 33.26	27.44
GROUP 4.....	\$ 32.12	27.44
GROUP 5.....	\$ 30.98	27.44

FOOTNOTE: Work suspended by ropes or cables, or work on a Yo-Yo Cat: \$.60 per hour additional.

POWER EQUIPMENT OPERATOR CLASSIFICATIONS

GROUP 1: Operator of helicopter (when used in erection work); Hydraulic excavator, 7 cu. yds. and over; Power shovels, over 7 cu. yds.

GROUP 2: Highline cableway; Hydraulic excavator, 3-1/2 cu. yds. up to 7 cu. yds.; Licensed construction work boat operator, on site; Power blade operator (finish); Power shovels, over 1 cu. yd. up to and including 7 cu. yds. m.r.c.

GROUP 3: Asphalt milling machine; Cable backhoe; Combination backhoe and loader over 3/4 cu. yds.; Continuous flight tie back machine assistant to engineer or mechanic; Crane mounted continuous flight tie back machine, tonnage to apply; Crane mounted drill attachment, tonnage to apply; Dozer, slope brd; Gradall; Hydraulic excavator, up to 3 1/2 cu. yds.; Loader 4 cu. yds. and over; Long reach excavator; Multiple engine scraper (when used as push pull); Power shovels, up to and including 1 cu. yd.; Pre-stress wire wrapping machine; Side boom cat, 572 or larger; Track loader 4 cu. yds. and over; Wheel excavator (up to and including 750 cu. yds. per hour)

GROUP 4: Asphalt plant engineer/box person; Chicago boom; Combination backhoe and loader up to and including 3/4 cu. yd.; Concrete batch plant (wet or dry); Dozer and/or push cat; Pull- type elevating loader; Gradesetter, grade checker (GPS, mechanical or otherwise); Grooving and grinding machine; Heading shield operator; Heavy-duty drilling equipment, Hughes, LDH, Watson 3000 or similar; Heavy-duty repairperson and/or welder; Lime spreader; Loader under 4 cu. yds.; Lubrication and service engineer (mobile and grease rack); Mechanical finishers or spreader machine (asphalt, Barber-Greene and similar); Miller Formless M-9000 slope paver or similar; Portable crushing and screening plants; Power blade support; Roller operator, asphalt; Rubber-tired scraper, self-loading (paddle-wheels, etc.); Rubber- tired earthmoving equipment (scrapers); Slip form paver (concrete); Small tractor with drag; Soil stabilizer (P & H or equal); Spider plow and spider puller; Tubex pile rig; Unlicensed constuction work boat operator, on site; Timber skidder; Track loader up to 4 yds.; Tractor-drawn scraper; Tractor, compressor drill combination; Welder; Woods-Mixer (and other similar Pugmill

equipment)

GROUP 5: Cast-in-place pipe laying machine; Combination slusher and motor operator; Concrete conveyor or concrete pump, truck or equipment mounted; Concrete conveyor, building site; Concrete pump or pumpcrete gun; Drilling equipment, Watson 2000, Texoma 700 or similar; Drilling and boring machinery, horizontal (not to apply to waterliners, wagon drills or jackhammers); Concrete mixer/all; Person and/or material hoist; Mechanical finishers (concrete) (Clary, Johnson, Bidwell Bridge Deck or similar types); Mechanical burm, curb and/or curb and gutter machine, concrete or asphalt); Mine or shaft hoist; Portable crusher; Power jumbo operator (setting slip-forms, etc., in tunnels); Screed (automatic or manual); Self-propelled compactor with dozer; Tractor with boom D6 or smaller; Trenching machine, maximum digging capacity over 5 ft. depth; Vermeer T-600B rock cutter or similar

GROUP 6: Armor-Coater (or similar); Ballast jack tamper; Boom- type backfilling machine; Assistant plant engineer; Bridge and/or gantry crane; Chemical grouting machine, truck-mounted; Chip spreading machine operator; Concrete saw (self-propelled unit on streets, highways, airports and canals); Deck engineer; Drilling equipment Texoma 600, Hughes 200 Series or similar up to and including 30 ft. m.r.c.; Drill doctor; Helicopter radio operator; Hydro-hammer or similar; Line master; Skidsteer loader, Bobcat larger than 743 series or similar (with attachments); Locomotive; Lull hi-lift or similar; Oiler, truck mounted equipment; Pavement breaker, truck-mounted, with compressor combination; Paving fabric installation and/or laying machine; Pipe bending machine (pipelines only); Pipe wrapping machine (tractor propelled and supported); Screed (except asphaltic concrete paving); Self-propelled pipeline wrapping machine; Tractor; Self-loading chipper; Concrete barrier moving machine

GROUP 7: Ballast regulator; Boom truck or dual-purpose A-frame truck, non-rotating - under 15 tons; Cary lift or similar; Combination slurry mixer and/or cleaner; Drilling equipment, 20 ft. and under m.r.c.; Firetender (hot plant); Grouting machine operator; Highline cableway signalperson; Stationary belt loader (Kolman or similar); Lift slab machine (Vagtborg and similar types); Maginnes internal full slab vibrator; Material hoist (1 drum); Mechanical trench shield; Pavement breaker with or without compressor combination); Pipe cleaning machine (tractor propelled and

supported); Post driver; Roller (except asphalt); Chip Seal; Self-propelled automatically applied concrete curing machine (on streets, highways, airports and canals); Self-propelled compactor (without dozer); Signalperson; Slip-form pumps (lifting device for concrete forms); Tie spacer; Tower mobile; Trenching machine, maximum digging capacity up to and including 5 ft. depth; Truck- type loader

GROUP 8: Bit sharpener; Boiler tender; Box operator; Brakeperson; Combination mixer and compressor (shotcrete/gunite); Compressor operator; Deckhand; Fire tender; Forklift (under 20 ft.); Generator; Gunite/shotcrete equipment operator; Hydraulic monitor; Ken seal machine (or similar); Mixermobile; Oiler; Pump operator; Refrigeration plant; Reservoir-debris tug (self-propelled floating); Ross Carrier (construction site); Rotomist operator; Self-propelled tape machine; Shuttlecar; Self-propelled power sweeper operator (includes vacuum sweeper); Slusher operator; Surface heater; Switchperson; Tar pot firetender; Tugger hoist, single drum; Vacuum cooling plant; Welding machine (powered other than by electricity)

GROUP 8-A: Elevator operator; Skidsteer loader-Bobcat 743 series or smaller, and similar (without attachments); Mini excavator under 25 H.P. (backhoe-trencher); Tub grinder wood chipper

ALL CRANES AND ATTACHMENTS

GROUP 1: Clamshell and dragline over 7 cu. yds.; Crane, over 100 tons; Derrick, over 100 tons; Derrick barge pedestal-mounted, over 100 tons; Self-propelled boom-type lifting device, over 100 tons

GROUP 2: Clamshell and dragline over 1 cu. yd. up to and including 7 cu. yds.; Crane, over 45 tons up to and including 100 tons; Derrick barge, 100 tons and under; Self-propelled boom-type lifting device, over 45 tons; Tower crane

GROUP 3: Clamshell and dragline up to and including 1 cu. yd.; Cranes 45 tons and under; Self-propelled boom-type lifting device 45 tons and under;

GROUP 4: Boom Truck or dual purpose A-frame truck,

non-rotating over 15 tons; Truck-mounted rotating telescopic boom type lifting device, Manitex or similar (boom truck) over 15 tons; Truck-mounted rotating telescopic boom type lifting device, Manitex or similar (boom truck) - under 15 tons;

PILEDRIVERS

GROUP 1: Derrick barge pedestal mounted over 100 tons; Clamshell over 7 cu. yds.; Self-propelled boom-type lifting device over 100 tons; Truck crane or crawler, land or barge mounted over 100 tons

GROUP 2: Derrick barge pedestal mounted 45 tons to and including 100 tons; Clamshell up to and including 7 cu. yds.; Self-propelled boom-type lifting device over 45 tons; Truck crane or crawler, land or barge mounted, over 45 tons up to and including 100 tons; Fundex F-12 hydraulic pile rig

GROUP 3: Derrick barge pedestal mounted under 45 tons; Self-propelled boom-type lifting device 45 tons and under; Skid/scow piledriver, any tonnage; Truck crane or crawler, land or barge mounted 45 tons and under

GROUP 4: Assistant operator in lieu of assistant to engineer; Forklift, 10 tons and over; Heavy-duty repairperson/welder

GROUP 5: Deck engineer

GROUP 6: Deckhand; Fire tender

STEEL ERECTORS

GROUP 1: Crane over 100 tons; Derrick over 100 tons; Self-propelled boom-type lifting device over 100 tons

GROUP 2: Crane over 45 tons to 100 tons; Derrick under 100 tons; Self-propelled boom-type lifting device over 45 tons to 100 tons; Tower crane

GROUP 3: Crane, 45 tons and under; Self-propelled boom-type lifting device, 45 tons and under

GROUP 4: Chicago boom; Forklift, 10 tons and over; Heavy-duty

repair person/welder

GROUP 5: Boom cat

--

TUNNEL AND UNDERGROUND WORK

GROUP 1-A: Tunnel bore machine operator, 20' diameter or more

GROUP 1: Heading shield operator; Heavy-duty repairperson;
Mucking machine (rubber tired, rail or track type); Raised
bore operator (tunnels); Tunnel mole bore operator

GROUP 2: Combination slusher and motor operator; Concrete
pump or pumpcrete gun; Power jumbo operator

GROUP 3: Drill doctor; Mine or shaft hoist

GROUP 4: Combination slurry mixer cleaner; Grouting Machine
operator; Motorman

GROUP 5: Bit Sharpener; Brakeman; Combination mixer and
compressor (gunite); Compressor operator; Oiler; Pump
operator; Slusher operator

AREA DESCRIPTIONS:

POWER EQUIPMENT OPERATORS, CRANES AND ATTACHMENTS, TUNNEL AND
UNDERGROUND [These areas do not apply to Piledrivers and
Steel Erectors]

AREA 1: ALAMEDA, BUTTE, CONTRA COSTA, KINGS, MARIN, MERCED,
NAPA, SACRAMENTO, SAN BENITO, SAN FRANCISCO, SAN JOAQUIN,
SAN MATEO, SANTA CLARA, SANTA CRUZ, SOLANO, STANISLAUS,
SUTTER, YOLO, AND YUBA COUNTIES

AREA 2 - MODOC COUNTY

THE REMAINING COUNTIES ARE SPLIT BETWEEN AREA 1 AND AREA 2 AS
NOTED BELOW:

ALPINE COUNTY:

Area 1: Northernmost part

Area 2: Remainder

CALAVERAS COUNTY:

Area 1: Except Eastern part

Area 2: Eastern part

COLUSA COUNTY:

Area 1: Eastern part

Area 2: Remainder

DEL NORTE COUNTY:

Area 1: Extreme Southwestern corner

Area 2: Remainder

ELDORADO COUNTY:

Area 1: North Central part

Area 2: Remainder

FRESNO COUNTY

Area 1: Except Eastern part

Area 2: Eastern part

GLENN COUNTY:

Area 1: Eastern part

Area 2: Remainder

HUMBOLDT COUNTY:

Area 1: Except Eastern and Southwestern parts

Area 2: Remainder

LAKE COUNTY:

Area 1: Southern part

Area 2: Remainder

LASSEN COUNTY:

Area 1: Western part along the Southern portion of border
with Shasta County

Area 2: Remainder

MADERA COUNTY

Area 1: Remainder

Area 2: Eastern part

MARIPOSA COUNTY

Area 1: Remainder

Area 2: Eastern part

MENDOCINO COUNTY:

Area 1: Central and Southeastern parts

Area 2: Remainder

MONTEREY COUNTY

Area 1: Remainder

Area 2: Southwestern part

NEVADA COUNTY:

Area 1: All but the Northern portion along the border of
Sierra County

Area 2: Remainder

PLACER COUNTY:

Area 1: All but the Central portion

Area 2: Remainder

PLUMAS COUNTY:

Area 1: Western portion

Area 2: Remainder

SHASTA COUNTY:

Area 1: All but the Northeastern corner

Area 2: Remainder

SIERRA COUNTY:

Area 1: Western part

Area 2: Remainder

SISKIYOU COUNTY:

Area 1: Central part

Area 2: Remainder

SONOMA COUNTY:

Area 1: All but the Northwestern corner

Area 2: Reaminder

TEHAMA COUNTY:

Area 1: All but the Western border with mendocino & Trinity
Counties

Area 2: Remainder

TRINITY COUNTY:

Area 1: East Central part and the Northeaster border with
Shasta County

Area 2: Remainder

TULARE COUNTY;

Area 1: Remainder

Area 2: Eastern part

TUOLUMNE COUNTY:

Area 1: Remainder

Area 2: Eastern Part

ENGI0003-019 07/01/2013

SEE AREA DESCRIPTIONS BELOW

	Rates	Fringes
OPERATOR: Power Equipment (LANDSCAPE WORK ONLY)		
GROUP 1		
AREA 1.....	\$ 29.64	25.71
AREA 2.....	\$ 31.64	25.71
GROUP 2		
AREA 1.....	\$ 26.04	25.71
AREA 2.....	\$ 28.04	25.71
GROUP 3		
AREA 1.....	\$ 21.43	25.71
AREA 2.....	\$ 23.43	25.71

GROUP DESCRIPTIONS:

GROUP 1: Landscape Finish Grade Operator: All finish grade work regardless of equipment used, and all equipment with a rating more than 65 HP.

GROUP 2: Landscape Operator up to 65 HP: All equipment with a manufacturer's rating of 65 HP or less except equipment covered by Group 1 or Group 3. The following equipment shall be included except when used for finish work as long as manufacturer's rating is 65 HP or less: A-Frame and Winch Truck, Backhoe, Forklift, Hydragraphic Seeder Machine, Roller, Rubber-Tired and Track Earthmoving Equipment, Skiploader, Straw Blowers, and Trencher 31 HP up to 65 HP.

GROUP 3: Landscae Utility Operator: Small Rubber-Tired Tractor, Trencher Under 31 HP.

AREA DESCRIPTIONS:

AREA 1: ALAMEDA, BUTTE, CONTRA COSTA, KINGS, MARIN, MERCED, NAPA, SACRAMENTO, SAN BENITO, SAN FRANCISCO, SAN JOAQUIN, SAN MATEO, SANTA CLARA, SANTA CRUZ, SOLANO, STANISLAUS,

SUTTER, YOLO, AND YUBA COUNTIES

AREA 2 - MODOC COUNTY

THE REMAINING COUNTIES ARE SPLIT BETWEEN AREA 1 AND AREA 2 AS NOTED BELOW:

ALPINE COUNTY:

Area 1: Northernmost part

Area 2: Remainder

CALAVERAS COUNTY:

Area 1: Except Eastern part

Area 2: Eastern part

COLUSA COUNTY:

Area 1: Eastern part

Area 2: Remainder

DEL NORTE COUNTY:

Area 1: Extreme Southwestern corner

Area 2: Remainder

ELDORADO COUNTY:

Area 1: North Central part

Area 2: Remainder

FRESNO COUNTY

Area 1: Except Eastern part

Area 2: Eastern part

GLENN COUNTY:

Area 1: Eastern part

Area 2: Remainder

HUMBOLDT COUNTY:

Area 1: Except Eastern and Southwestern parts

Area 2: Remainder

LAKE COUNTY:

Area 1: Southern part

Area 2: Remainder

LASSEN COUNTY:

Area 1: Western part along the Southern portion of border with Shasta County

Area 2: Remainder

MADERA COUNTY
Area 1: Remainder
Area 2: Eastern part

MARIPOSA COUNTY
Area 1: Remainder
Area 2: Eastern part

MENDOCINO COUNTY:
Area 1: Central and Southeastern parts
Area 2: Remainder

MONTEREY COUNTY
Area 1: Remainder
Area 2: Southwestern part

NEVADA COUNTY:
Area 1: All but the Northern portion along the border of
Sierra County
Area 2: Remainder

PLACER COUNTY:
Area 1: All but the Central portion
Area 2: Remainder

PLUMAS COUNTY:
Area 1: Western portion
Area 2: Remainder

SHASTA COUNTY:
Area 1: All but the Northeastern corner
Area 2: Remainder

SIERRA COUNTY:
Area 1: Western part
Area 2: Remainder

SISKIYOU COUNTY:
Area 1: Central part
Area 2: Remainder

SONOMA COUNTY:
Area 1: All but the Northwestern corner
Area 2: Reaminder

TEHAMA COUNTY:
Area 1: All but the Western border with mendocino & Trinity
Counties

Area 2: Remainder

TRINITY COUNTY:

Area 1: East Central part and the Northeaster border with Shasta County

Area 2: Remainder

TULARE COUNTY;

Area 1: Remainder

Area 2: Eastern part

TUOLUMNE COUNTY:

Area 1: Remainder

Area 2: Eastern Part

IRON0377-002 07/01/2014

Rates Fringes

Ironworkers:

Fence Erector.....	\$ 26.58	17.74
Ornamental, Reinforcing and Structural.....	\$ 33.50	26.74

PREMIUM PAY:

\$6.00 additional per hour at the following locations:

China Lake Naval Test Station, Chocolate Mountains Naval Reserve-Niland, Edwards AFB, Fort Irwin Military Station, Fort Irwin Training Center-Goldstone, San Clemente Island, San Nicholas Island, Susanville Federal Prison, 29 Palms - Marine Corps, U.S. Marine Base - Barstow, U.S. Naval Air Facility - Sealey, Vandenberg AFB

\$4.00 additional per hour at the following locations:

Army Defense Language Institute - Monterey, Fallon Air Base, Naval Post Graduate School - Monterey, Yermo Marine Corps Logistics Center

\$2.00 additional per hour at the following locations:

Port Hueneme, Port Mugu, U.S. Coast Guard Station - Two Rock

LABO0067-002 06/29/2014

AREA "A" - ALAMEDA, CONTRA COSTA, MARIN, SAN FRANCISCO, SAN MATEO AND SANTA CLARA COUNTIES

AREA "B" - ALPINE, AMADOR, BUTTE, CALAVERAS, COLUSA, DEL NORTE, EL DORADO, FRESNO, GLENN, HUMBOLDT, KINGS, LAKE, LASSEN, MADERA, MARIPOSA, MENDOCINO, MERCED, MODOC, MONTEREY, NAPA, NEVADA, PLACER, PLUMAS, SACRAMENTO, SAN BENITO, SAN JOAQUIN, SANTA CRUZ, SHASTA, SIERRA, SISKIYOU, SOLANO, SONOMA, STANISLAUS, SUTTER, TEHAMA, TRINITY, TULARE, TUOLUMNE, YOLO AND YUBA COUNTIES

Rates Fringes

Asbestos Removal Laborer		
Areas A & B.....	\$ 19.66	9.02
LABORER (Lead Removal)		
Area A.....	\$ 29.02	19.42
Area B.....	\$ 28.02	19.42

ASBESTOS REMOVAL-SCOPE OF WORK: Site mobilization; initial site clean-up; site preparation; removal of asbestos-containing materials from walls and ceilings; or from pipes, boilers and mechanical systems only if they are being scrapped; encapsulation, enclosure and disposal of asbestos-containing materials by hand or with equipment or machinery; scaffolding; fabrication of temporary wooden barriers; and assembly of decontamination stations.

LABO0067-006 06/30/2014

AREA "A" - ALAMEDA, CONTRA COSTA, MARIN, SAN FRANCISCO, SAN MATEO AND SANTA CLARA COUNTIES

AREA "B" - ALPINE, AMADOR, BUTTE, CALAVERAS, COLUSA, EL DORADO, FRESNO, GLENN, KINGS, LASSEN, MADERA, MARIPOSA, MERCED, MODOC, MONTEREY, NAPA, NEVADA, PLACER, PLUMAS, SACRAMENTO, SAN BENITO, SAN JOAQUIN, SANTA CRUZ, SHASTA, SIERRA, SISKIYOU, SOLANO, SONOMA, STANISLAUS, SUTTER, TEHAMA, TRINITY, TULARE, TUOLUMNE, YOLO AND YUBA COUNTIES

Rates Fringes

Laborers: (CONSTRUCTION CRAFT

LABORERS - AREA A:)

Construction Specialist		
Group.....	\$ 29.09	18.66
GROUP 1.....	\$ 28.39	18.66
GROUP 1-a.....	\$ 28.61	18.66
GROUP 1-c.....	\$ 28.44	18.66
GROUP 1-e.....	\$ 28.94	18.66
GROUP 1-f.....	\$ 28.97	18.66
GROUP 1-g (Contra Costa County).....	\$ 28.59	18.66
GROUP 2.....	\$ 28.24	18.66
GROUP 3.....	\$ 28.14	18.66
GROUP 4.....	\$ 21.83	18.66

See groups 1-b and 1-d under laborer classifications.

Laborers: (CONSTRUCTION CRAFT

LABORERS - AREA B:)

Construction Specialist		
Group.....	\$ 28.09	18.66
GROUP 1.....	\$ 27.39	18.66
GROUP 1-a.....	\$ 27.61	18.66
GROUP 1-c.....	\$ 27.44	18.66
GROUP 1-e.....	\$ 27.94	18.66
GROUP 1-f.....	\$ 27.97	18.66
GROUP 2.....	\$ 27.24	18.66
GROUP 3.....	\$ 27.14	18.66
GROUP 4.....	\$ 20.83	18.66

See groups 1-b and 1-d under laborer classifications.

Laborers: (GUNITE - AREA A:)

GROUP 1.....	\$ 29.35	18.66
GROUP 2.....	\$ 28.85	18.66
GROUP 3.....	\$ 28.26	18.66
GROUP 4.....	\$ 28.14	18.66

Laborers: (GUNITE - AREA B:)

GROUP 1.....	\$ 28.35	18.66
GROUP 2.....	\$ 27.85	18.66
GROUP 3.....	\$ 27.26	18.66
GROUP 4.....	\$ 27.14	18.66

Laborers: (WRECKING - AREA A:)

GROUP 1.....	\$ 28.39	18.66
GROUP 2.....	\$ 28.24	18.66

Laborers: (WRECKING - AREA B:)

GROUP 1.....	\$ 27.39	18.66
GROUP 2.....	\$ 27.24	18.66

Landscape Laborer (GARDENERS,
HORTICULTURAL & LANDSCAPE

LABORERS - AREA A:)

(1) New Construction.....	\$ 28.14	18.66
(2) Establishment Warranty		

Period.....	\$ 21.83	18.66
Landscape Laborer (GARDENERS, HORTICULURAL & LANDSCAPE LABORERS - AREA B:)		
(1) New Construction.....	\$ 27.14	18.66
(2) Establishment Warranty Period.....	\$ 20.83	18.66

FOOTNOTES:

Laborers working off or with or from bos'n chairs, swinging scaffolds, belts shall receive \$0.25 per hour above the applicable wage rate. This shall not apply to workers entitled to receive the wage rate set forth in Group 1-a below.

LABORER CLASSIFICATIONS

CONSTRUCTION SPECIALIST GROUP: Asphalt ironer and raker; Chainsaw; Laser beam in connection with laborers' work; Cast-in- place manhole form setter; Pressure pipelayer; Davis trencher - 300 or similar type (and all small trenchers); Blaster; Diamond driller; Multiple unit drill; Hydraulic drill

GROUP 1: Asphalt spreader boxes (all types); Barko, Wacker and similar type tampers; Buggymobile; Caulker, bander, pipewrapper, conduit layer, plastic pipelayer; Certified hazardous waste worker including Leade Abatement; Compactors of all types; Concrete and magnesite mixer, 1/2 yd. and under; Concrete pan work; Concrete sander; Concrete saw; Cribber and/or shoring; Cut granite curb setter; Dri-pak-it machine; Faller, logloader and buckler; Form raiser, slip forms; Green cutter; Headerboard, Hubsetter, aligner, by any method; High pressure blow pipe (1-1/2" or over, 100 lbs. pressure/over); Hydro seeder and similar type; Jackhammer operator; Jacking of pipe over 12 inches; Jackson and similar type compactor; Kettle tender, pot and worker applying asphalt, lay-kold, creosote, lime, caustic and similar type materials (applying means applying, dipping or handling of such materials); Lagging, sheeting, whaling, bracing, trenchjacking, lagging hammer; Magnesite, epoxyresin, fiberglass, mastic worker (wet or dry); No joint pipe and stripping of same, including repair of voids; Pavement breaker and spader, including tool grinder; Perma curb; Pipelayer (including grade checking in

connection with pipelaying); Precast-manhole setter; Pressure pipe tester; Post hole digger, air, gas and electric; Power broom sweeper; Power tampers of all types (except as shown in Group 2); Ram set gun and stud gun; Riprap stonepaver and rock-slinger, including placing of sacked concrete and/or sand (wet or dry) and gabions and similar type; Rotary scarifier or multiple head concrete chipping scarifier; Roto and Ditch Witch; Rototiller; Sandblaster, pot, gun, nozzle operators; Signalling and rigging; Tank cleaner; Tree climber; Turbo blaster; Vibrascreed, bull float in connection with laborers' work; Vibrator; Hazardous waste worker (lead removal); Asbestos and mold removal worker

GROUP 1-a: Joy drill model TWM-2A; Gardner-Denver model DH143 and similar type drills; Track driller; Jack leg driller; Wagon driller; Mechanical drillers, all types regardless of type or method of power; Mechanical pipe layers, all types regardless of type or method of power; Blaster and powder; All work of loading, placing and blasting of all powder and explosives of whatever type regardless of method used for such loading and placing; High scalers (including drilling of same); Tree topper; Bit grinder

GROUP 1-b: Sewer cleaners shall receive \$4.00 per day above Group 1 wage rates. "Sewer cleaner" means any worker who handles or comes in contact with raw sewage in small diameter sewers. Those who work inside recently active, large diameter sewers, and all recently active sewer manholes shall receive \$5.00 per day above Group 1 wage rates.

GROUP 1-c: Burning and welding in connection with laborers' work; Synthetic thermoplastics and similar type welding

GROUP 1-d: Maintenance and repair track and road beds. All employees performing work covered herein shall receive \$.25 per hour above their regular rate for all work performed on underground structures not specifically covered herein. This paragraph shall not be construed to apply to work below ground level in open cut. It shall apply to cut and cover work of subway construction after the temporary cover has been placed.

GROUP 1-e: Work on and/or in bell hole footings and shafts thereof, and work on and in deep footings. (A deep footing is a hole 15 feet or more in depth.) In the event the depth of the footing is unknown at the commencement of

excavation, and the final depth exceeds 15 feet, the deep footing wage rate would apply to all employees for each and every day worked on or in the excavation of the footing from the date of inception.

GROUP 1-f: Wire winding machine in connection with guniting or shot crete

GROUP 1-g, CONTRA COSTA COUNTY: Pipelayer (including grade checking in connection with pipelaying); Caulker; Bander; Pipewrapper; Conduit layer; Plastic pipe layer; Pressure pipe tester; No joint pipe and stripping of same, including repair of voids; Precast manhole setters, cast in place manhole form setters

GROUP 2: Asphalt shoveler; Cement dumper and handling dry cement or gypsum; Choke-setter and rigger (clearing work); Concrete bucket dumper and chute; Concrete chipping and grinding; Concrete laborer (wet or dry); Driller tender, chuck tender, nipper; Guinea chaser (stake), grout crew; High pressure nozzle, adductor; Hydraulic monitor (over 100 lbs. pressure); Loading and unloading, carrying and hauling of all rods and materials for use in reinforcing concrete construction; Pittsburgh chipper and similar type brush shredders; Sloper; Single foot, hand-held, pneumatic tamper; All pneumatic, air, gas and electric tools not listed in Groups 1 through 1-f; Jacking of pipe - under 12 inches

GROUP 3: Construction laborers, including bridge and general laborer; Dump, load spotter; Flag person; Fire watcher; Fence erector; Guardrail erector; Gardener, horticultural and landscape laborer; Jetting; Limber, brush loader and piler; Pavement marker (button setter); Maintenance, repair track and road beds; Streetcar and railroad construction track laborer; Temporary air and water lines, Victaulic or similar; Tool room attendant (jobsite only)

GROUP 4: Final clean-up work of debris, grounds and building including but not limited to: street cleaner; cleaning and washing windows; brick cleaner (jobsite only); material cleaner (jobsite only). The classification "material cleaner" is to be utilized under the following conditions:

A: at demolition site for the salvage of the material.

B: at the conclusion of a job where the material is to be salvaged and stocked to be reused on another job.

C: for the cleaning of salvage material at the jobsite or temporary jobsite yard.

The material cleaner classification should not be used in the performance of "form stripping, cleaning and oiling and moving to the next point of erection".

GUNITE LABORER CLASSIFICATIONS

GROUP 1: Structural Nozzleman

GROUP 2: Nozzleman, Gunman, Potman, Groundman

GROUP 3: Reboundman

GROUP 4: Gunite laborer

WRECKING WORK LABORER CLASSIFICATIONS

GROUP 1: Skilled wrecker (removing and salvaging of sash, windows and materials)

GROUP 2: Semi-skilled wrecker (salvaging of other building materials)

LABO0185-002 06/30/2014

ALPINE, AMADOR, BUTTE, COLUSA, EL DORADO, GLENN, LASSEN, MODOC, NEVADA, PLACER, PLUMAS, SACRAMENTO, SHASTA, SIERRA, SISKIYOU, SUTTER, TEHAMA, TRINITY, YOLO AND YUBA COUNTIES

Rates Fringes

LABORER

Mason Tender-Brick.....\$ 31.11 17.34

LABO0185-005 06/30/2014

ALPINE, AMADOR, BUTTE, COLUSA, EL DORADO, GLENN, LASSEN, MODOC, NEVADA, PLACER, PLUMAS, SACRAMENTO, SHASTA, SIERRA, SISKIYOU, SUTTER, TEHAMA, TRINITY, YOLO AND YUBA COUNTIES

Rates Fringes

Tunnel and Shaft Laborers:

GROUP 1.....	\$ 34.60	19.49
GROUP 2.....	\$ 34.37	19.49
GROUP 3.....	\$ 34.12	19.49
GROUP 4.....	\$ 33.67	19.49
GROUP 5.....	\$ 33.13	19.49
Shotcrete Specialist.....	\$ 35.12	19.49

TUNNEL AND SHAFT CLASSIFICATIONS

GROUP 1: Diamond driller; Groundmen; Gunite and shotcrete nozzlemen

GROUP 2: Rodmen; Shaft work & raise (below actual or excavated ground level)

GROUP 3: Bit grinder; Blaster, driller, powdermen, heading; Cherry pickermen - where car is lifted; Concrete finisher in tunnel; Concrete screedman; Grout pumpman and potman; Gunite & shotcrete gunman & potman; Headermen; High pressure nozzleman; Miner - tunnel, including top and bottom man on shaft and raise work; Nipper; Nozzleman on slick line; Sandblaster - potman, Robotic Shotcrete Placer, Segment Erector, Tunnel Muck Hauler, Steel Form raiser and setter; Timberman, retimberman (wood or steel or substitute materials therefore); Tugger (for tunnel laborer work); Cable tender; Chuck tender; Powderman - primer house

GROUP 4: Vibrator operator, pavement breaker; Bull gang - muckers, trackmen; Concrete crew - includes rodding and spreading, Dumpmen (any method)

GROUP 5: Grout crew; Reboundman; Swamper/ Brakeman

LABO0261-002 06/30/2014

MARIN COUNTY

Rates Fringes

LABORER (TRAFFIC CONTROL/LANE CLOSURE)

Escort Driver, Flag Person..	\$ 28.14	19.03
Traffic Control Person I....	\$ 28.44	19.03
Traffic Control Person II...	\$ 25.94	19.03

TRAFFIC CONTROL PERSON I: Layout of traffic control, crash cushions, construction area and roadside signage.

TRAFFIC CONTROL PERSON II: Installation and removal of temporary/permanent signs, markers, delineators and crash cushions.

LABO0261-004 06/30/2014

MARIN COUNTY

	Rates	Fringes
Tunnel and Shaft Laborers:		
GROUP 1.....	\$ 34.60	19.49
GROUP 2.....	\$ 34.37	19.49
GROUP 3.....	\$ 34.12	19.49
GROUP 4.....	\$ 33.67	19.49
GROUP 5.....	\$ 33.13	19.49
Shotcrete Specialist.....	\$ 35.12	19.49

TUNNEL AND SHAFT CLASSIFICATIONS

GROUP 1: Diamond driller; Groundmen; Gunite and shotcrete nozzlemen

GROUP 2: Rodmen; Shaft work & raise (below actual or excavated ground level)

GROUP 3: Bit grinder; Blaster, driller, powdermen, heading; Cherry pickermen - where car is lifted; Concrete finisher in tunnel; Concrete screedman; Grout pumpman and potman; Gunite & shotcrete gunman & potman; Headermen; High pressure nozzleman; Miner - tunnel, including top and bottom man on shaft and raise work; Nipper; Nozzleman on slick line; Sandblaster - potman, Robotic Shotcrete Placer, Segment Erector, Tunnel Muck Hauler, Steel Form raiser and setter; Timberman, retimberman (wood or steel or substitute materials therefore); Tugger (for tunnel laborer work); Cable tender; Chuck tender; Powderman - primer house

GROUP 4: Vibrator operator, pavement breaker; Bull gang - muckers, trackmen; Concrete crew - includes rodding and spreading, Dumpmen (any method)

GROUP 5: Grout crew; Reboundman; Swamper/ Brakeman

LABO0261-007 06/30/2014

MARIN COUNTY

	Rates	Fringes
LABORER		
Mason Tender-Brick.....	\$ 32.36	17.34

LABO0324-004 06/30/2014

NAPA, SOLANO, AND SONOMA, COUNTIES

	Rates	Fringes
LABORER (TRAFFIC CONTROL/LANE CLOSURE)		
Escort Driver, Flag Person..	\$ 27.14	19.03
Traffic Control Person I....	\$ 27.44	19.03
Traffic Control Person II...	\$ 24.94	19.03

TRAFFIC CONTROL PERSON I: Layout of traffic control, crash cushions, construction area and roadside signage.

TRAFFIC CONTROL PERSON II: Installation and removal of temporary/permanent signs, markers, delineators and crash cushions.

LABO0324-008 06/30/2014

NAPA, SOLANO, AND SONOMA COUNTIES

	Rates	Fringes
Tunnel and Shaft Laborers:		
GROUP 1.....	\$ 34.60	19.49
GROUP 2.....	\$ 34.37	19.49
GROUP 3.....	\$ 34.12	19.49
GROUP 4.....	\$ 33.67	19.49
GROUP 5.....	\$ 33.13	19.49
Shotcrete Specialist.....	\$ 35.12	19.49

TUNNEL AND SHAFT CLASSIFICATIONS

GROUP 1: Diamond driller; Groundmen; Gunite and shotcrete nozzlemen

GROUP 2: Rodmen; Shaft work & raise (below actual or excavated ground level)

GROUP 3: Bit grinder; Blaster, driller, powdermen, heading; Cherry pickermen - where car is lifted; Concrete finisher in tunnel; Concrete screedman; Grout pumpman and potman; Guniting & shotcrete gunman & potman; Headermen; High pressure nozzleman; Miner - tunnel, including top and bottom man on shaft and raise work; Nipper; Nozzleman on slick line; Sandblaster - potman, Robotic Shotcrete Placer, Segment Erector, Tunnel Muck Hauler, Steel Form raiser and setter; Timberman, retimberman (wood or steel or substitute materials therefore); Tugger (for tunnel laborer work); Cable tender; Chuck tender; Powderman - primer house

GROUP 4: Vibrator operator, pavement breaker; Bull gang - muckers, trackmen; Concrete crew - includes rodding and spreading, Dumpmen (any method)

GROUP 5: Grout crew; Reboundman; Swamper/ Brakeman

LABO0324-010 06/30/2014

NAPA, SOLANO AND SONOMA COUNTIES

	Rates	Fringes
LABORER (Brick)		
Mason Tender-Brick.....	\$ 31.36	17.34

LABO1414-005 08/07/2013

	Rates	Fringes
Plasterer tender.....	\$ 30.00	16.36

Work on a swing stage scaffold: \$1.00 per hour additional.

PAIN0016-004 01/01/2013

MARIN, NAPA, SOLANO & SONOMA COUNTIES

	Rates	Fringes
Painters:.....	\$ 33.86	20.26

PREMIUMS:

EXOTIC MATERIALS - \$0.75 additional per hour.

SPRAY WORK: - \$0.50 additional per hour.

INDUSTRIAL PAINTING - \$0.25 additional per hour

[Work on industrial buildings used for the manufacture and processing of goods for sale or service; steel construction (bridges), stacks, towers, tanks, and similar structures]

HIGH WORK:

over 50 feet - \$2.00 per hour additional

100 to 180 feet - \$4.00 per hour additional

Over 180 feet - \$6.00 per hour additional

PAIN0016-005 01/01/2013

ALPINE, BUTTE, COLUSA, EL DORADO (west of the Sierra Nevada Mountains), GLENN, LASSEN (west of Hwy. 395, excluding Honey Lake); MARIN, MODOC, NAPA, NEVADA (west of the Sierra Nevada Mountains), PLACER (west of the Sierra Nevada Mountains), PLUMAS, SACRAMENTO, SHASTA, SIERRA (west of the Sierra Nevada Mountains), SISKIYOU, SOLANO, SONOMA, SUTTER, TEHAMA, TRINITY, YOLO AND YUBA COUNTIES

Rates Fringes

DRYWALL FINISHER/TAPER.....\$ 36.24 18.67

PAIN0016-007 01/01/2013

ALPINE, AMADOR, BUTTE, COLUSA, EL DORADO (west of the Sierra Nevada Mountains), GLENN, LASSEN (west of Highway 395, excluding Honey Lake), MODOC, NEVADA (west of the Sierra Nevada Mountains), PLACER (west of the Sierra Nevada Mountains), PLUMAS, SACRAMENTO, SHASTA, SIERRA (west of the Sierra Nevada Mountains), SISKIYOU, SUTTER, TEHAMA, TRINITY, YOLO & YUBA COUNTIES

Rates Fringes

Painters:.....\$ 29.06 15.98

SPRAY/SANDBLAST: \$0.50 additional per hour.

EXOTIC MATERIALS: \$1.00 additional per hour.

HIGH TIME: Over 50 ft above ground or water level \$2.00 additional per hour. 100 to 180 ft above ground or water

level \$4.00 additional per hour. Over 180 ft above ground or water level \$6.00 additional per hour.

PAIN0016-008 01/01/2013

MARIN, NAPA, SOLANO AND SONOMA COUNTIES

	Rates	Fringes
SOFT FLOOR LAYER.....	\$ 44.87	17.98

PAIN0169-004 01/01/2013

MARIN , NAPA & SONOMA COUNTIES; SOLANO COUNTY (west of a line defined as follows: Hwy. 80 corridor beginning at the City of Fairfield, including Travis Air Force Base and Suisun City; going north of Manakas Corner Rd., continue north on Suisun Valley Rd. to the Napa County line; Hwy. 80 corridor south on Grizzly Island Rd. to the Grizzly Island Management area)

	Rates	Fringes
GLAZIER.....	\$ 41.88	21.59

* PAIN0567-001 07/01/2014

EL DORADO COUNTY (east of the Sierra Nevada Mountains); LASSEN COUNTY (east of Highway 395, beginning at Stacey and including Honey Lake); NEVADA COUNTY (east of the Sierra Nevada Mountains); PLACER COUNTY (east of the Sierra Nevada Mountains); AND SIERRA COUNTY (east of the Sierra Nevada Mountains)

	Rates	Fringes
Painters:		
Brush and Roller.....	\$ 23.16	10.38
Spray Painter & Paperhanger.	\$ 24.01	10.38

PREMIUMS:
Special Coatings (Brush), and Sandblasting = \$0.50/hr
Special Coatings (Spray), and Steeplejack = \$1.00/hr
Special Coating Spray Steel = \$1.25/hr
Swing Stage = \$2.00/hr

*A special coating is a coating that requires the mixing of 2 or more products.

PAIN0567-007 07/01/2014

EL DORADO COUNTY (east of the Sierra Nevada Mountains); LASSEN COUNTY (east of Highway 395, beginning at Stacey and including Honey Lake); NEVADA COUNTY (east of the Sierra Nevada Mountains); PLACER COUNTY (east of the Sierra Nevada Mountains) AND SIERRA COUNTY (east of the Sierra Nevada Mountains)

	Rates	Fringes
SOFT FLOOR LAYER.....	\$ 25.81	11.68

PAIN0567-010 07/01/2013

EL DORADO COUNTY (east of the Sierra Nevada Mountains); LASSEN COUNTY (east of Highway 395, beginning at Stacey and including Honey Lake); NEVADA COUNTY (east of the Sierra Nevada Mountains); PLACER COUNTY (east of the Sierra Nevada Mountains); AND SIERRA COUNTY (east of the Sierra Nevada Mountains)

	Rates	Fringes
Drywall		
(1) Taper.....	\$ 27.07	11.14
(2) Steeplejack - Taper, over 40 ft with open space below.....	\$ 28.57	11.14

PAIN0767-004 01/01/2013

ALPINE, AMADOR, BUTTE, COLUSA, EL DORADO, GLENN, LASSEN, MODOC, NEVADA, PLACER, PLUMAS, SACRAMENTO, SHASTA, SIERRA, SISKIYOU, SOLANO (Remainder), SUTTER, TEHAMA, TRINITY, YOLO, YUBA

	Rates	Fringes
GLAZIER.....	\$ 32.24	19.88

PAID HOLIDAYS: New Year's Day, Martin Luther King, Jr. Day, President's Day, Memorial Day, Independence Day, Labor Day,

Veteran's Day, Thanksgiving Day, and Christmas Day.

Employee required to wear a body harness shall receive \$1.50 per hour above the basic hourly rate at any elevation.

PAIN1176-001 07/01/2014

HIGHWAY IMPROVEMENT

	Rates	Fringes
Parking Lot Striping/Highway Marking:		
GROUP 1.....	\$ 34.26	11.65
GROUP 2.....	\$ 29.12	11.65
GROUP 3.....	\$ 29.46	11.65

CLASSIFICATIONS

GROUP 1: Striper: Layout and application of painted traffic stripes and marking; hot thermo plastic; tape, traffic stripes and markings

GROUP 2: Gamecourt & Playground Installer

GROUP 3: Protective Coating, Pavement Sealing

PAIN1237-001 01/01/2013

ALPINE; COLUSA; EL DORADO (west of the Sierra Nevada Mountains); GLENN; LASSEN (west of Highway 395, beginning at Stacey and including Honey Lake); MODOC; NEVADA (west of the Sierra Nevada Mountains); PLACER (west of the Sierra Nevada Mountains); PLUMAS; SACRAMENTO; SHASTA; SIERRA (west of the Sierra Nevada Mountains); SISKIYOU; SUTTER; TEHAMA; TRINITY; YOLO AND YUBA COUNTIES

	Rates	Fringes
SOFT FLOOR LAYER.....	\$ 28.25	16.73

PLAS0300-003 07/01/2014

Rates Fringes

PLASTERER

AREA 295: Alpine, Amador, Butte, Colusa, El Dorado, Glenn, Lassen, Modoc, Nevada, Placer, Plumas, Sacramento, Shasta, Sierra, Siskiyou, Solano, Sutter, Tehema, Trinity, Yolo & Yuba Counties.....	\$ 31.41	22.26
AREA 355: Marin.....	\$ 34.75	22.26
AREA 355: Napa & Sonoma Counties.....	\$ 31.41	22.26

PLAS0300-005 06/30/2014

	Rates	Fringes
CEMENT MASON/CONCRETE FINISHER...	\$ 30.00	22.07

PLUM0038-002 07/01/2014

MARIN AND SONOMA COUNTIES

	Rates	Fringes
PLUMBER (Plumber, Steamfitter, Refrigeration Fitter)		
(1) Work on wooden frame structures 5 stories or less excluding high-rise buildings and commercial work such as hospitals, prisons, hotels, schools, casinos, wastewater treatment plants, and research facilities as well as refrigeration pipefitting, service and repair work - MARKET RECOVERY RATE.....	\$ 54.40	40.71
(2) All other work - NEW CONSTRUCTION RATE.....	\$ 64.00	43.29

PLUM0038-006 07/01/2014

MARIN & SONOMA COUNTIES

	Rates	Fringes
Landscape/Irrigation Fitter (Underground/Utility Fitter).....	\$ 54.40	32.15

 PLUM0228-001 07/01/2014

BUTTE, COLUSA, GLENN, LASSEN, MODOC, PLUMAS, SHASTA, SIERRA,
 SISKIYOU, SUTTER, TEHAMA, TRINITY & YUBA COUNTIES

	Rates	Fringes
PLUMBER.....	\$ 37.00	25.89

 PLUM0343-001 07/01/2014

NAPA AND SOLANO COUNTIES

	Rates	Fringes
PLUMBER/PIPEFITTER		
Light Commercial.....	\$ 30.60	19.40
All Other Work.....	\$ 48.00	30.05

DEFINITION OF LIGHT COMMERCIAL:

Work shall include strip shopping centers, office buildings, schools and other commercial structures which the total plumbing bid does not exceed Two Hundred and Fifty Thousand (\$250,000) and the total heating and cooling does not exceed Two Hundred Fifty Thousand (\$250,000); or Any projects bid in phases shall not qualify unless the total project is less than Two Hundred Fifty Thousand (\$250,000) for the plumbing bid; and Two Hundred Fifty Thousand (\$250,000) for the heating and cooling bid. Excluded are hospitals, jails, institutions and industrial projects, regardless size of the project

FOOTNOTES: While fitting galvanized material: \$.75 per hour additional. Work from trusses, temporary staging, unguarded structures 35' from the ground or water: \$.75 per hour additional. Work from swinging scaffolds, boatswains chairs or similar devices: \$.75 per hour additional.

 PLUM0350-001 01/01/2011

EL DORADO COUNTY (Lake Tahoe area only); NEVADA COUNTY (Lake

Tahoe area only); AND PLACER COUNTY (Lake Tahoe area only)

	Rates	Fringes
PLUMBER/PIPEFITTER.....	\$ 34.60	10.50

PLUM0355-001 07/01/2014

ALPINE, AMADOR, BUTTE, COLUSA, EL DORADO, GLENN, LASSEN, MODOC,
NAPA, NEVADA, PLACER, PLUMAS, SACRAMENTO, SHASTA, SIERRA,
SISKIYOU, SOLANO, SUTTER, TEHAMA, TRINITY, YOLO, AND YUBA
COUNTIES

	Rates	Fringes
Underground Utility Worker /Landscape Fitter.....	\$ 28.55	9.25

PLUM0442-003 07/01/2014

AMADOR (South of San Joaquin River) and ALPINE COUNTIES

	Rates	Fringes
PLUMBER.....	\$ 38.00	25.39

PLUM0447-001 07/01/2013

AMADOR (north of San Joaquin River), EL DORADO (excluding Lake
Tahoe area), NEVADA (excluding Lake Tahoe area); PLACER
(excluding Lake Tahoe area), SACRAMENTO AND YOLO COUNTIES

	Rates	Fringes
PLUMBER/PIPEFITTER		
Journeyman.....	\$ 41.77	22.35
Light Commercial Work.....	\$ 32.23	17.22

ROOF0081-006 08/01/2014

MARIN, NAPA, SOLANO AND SONOMA COUNTIES

	Rates	Fringes
Roofer.....	\$ 35.06	13.89

ROOF0081-007 08/01/2014

ALPINE, BUTTE, COLUSA, EL DORADO, GLENN, LASSEN, MODOC, NEVADA,
PLACER, PLUMAS, SACRAMENTO, SHASTA, SIERRA, SISKIYOU, SUTTER,
TEHAMA, TRINITY, YOLO, AND YUBA COUNTIES

	Rates	Fringes
Roofer.....	\$ 33.23	13.79

SFCA0483-003 01/01/2014

MARIN, NAPA, SOLANO AND SONOMA COUNTIES

	Rates	Fringes
SPRINKLER FITTER (Fire Sprinklers).....	\$ 52.42	25.62

SFCA0669-003 07/01/2013

ALPINE, BUTTE, COLUSA, EL DORADO, GLENN, LASSEN, MODOC, NEVADA,
PLACER, PLUMAS, SACRAMENTO, SHASTA, SIERRA, SISKIYOU, SUTTER,
TEHAMA, TRINITY, YOLO AND YUBA COUNTIES

	Rates	Fringes
SPRINKLER FITTER.....	\$ 34.19	19.37

SHEE0104-006 07/01/2014

MARIN, NAPA, SOLANO SONOMA & TRINITY COUNTIES

	Rates	Fringes
Sheet Metal Worker Mechanical Contracts \$200,000 or less.....	\$ 48.79	35.29
All other work.....	\$ 54.85	35.91

SHEE0104-009 07/01/2014

AMADOR, COLUSA, EL DORADO, NEVADA, PLACER, SACRAMENTO, SUTTER,
YOLO AND YUBA COUNTIES

	Rates	Fringes
SHEET METAL WORKER.....	\$ 39.05	31.24

SHEE0104-010 07/01/2014

AIPINE COUNTY

	Rates	Fringes
SHEET METAL WORKER.....	\$ 36.59	28.66

SHEE0104-011 07/01/2014

BUTTE, COLUSA, EL DORADO, GLENN, LASSEN, MODOC, NEVADA, PLACER,
 PLUMAS, SACRAMENTO, SHASTA, SIERRA, SISKIYOU, SUTTER, TEHAMA,
 YOLO AND YUBA COUNTIES

	Rates	Fringes
Sheet Metal Worker (Metal decking and siding only).....	\$ 33.86	31.83

SHEE0104-014 07/01/2014

MARIN, NAPA, SOLANO, SONOMA AND TRINITY COUNTIES

	Rates	Fringes
SHEET METAL WORKER (Metal Decking and Siding only).....	\$ 33.86	31.83

SHEE0104-019 07/01/2014

BUTTE, GLENN, LASSEN, MODOC, PLUMAS, SHASTA, SIERRA, SISKIYOU
AND TEHAMA COUNTIES

	Rates	Fringes
SHEET METAL WORKER Mechanical Jobs \$200,000 & under.....	\$ 29.88	28.75
Mechanical Jobs over \$200,000.....	\$ 39.05	31.24

Rates Fringes

Truck drivers:

GROUP 1.....	\$ 27.96	24.28
GROUP 2.....	\$ 28.26	24.28
GROUP 3.....	\$ 28.56	24.28
GROUP 4.....	\$ 28.91	24.28
GROUP 5.....	\$ 29.26	24.28

FOOTNOTES:

Articulated dump truck; Bulk cement spreader (with or without auger); Dumpcrete truck; Skid truck (debris box); Dry pre-batch concrete mix trucks; Dumpster or similar type; Slurry truck: Use dump truck yardage rate.
 Heater planer; Asphalt burner; Scarifier burner; Industrial lift truck (mechanical tailgate); Utility and clean-up truck: Use appropriate rate for the power unit or the equipment utilized.

TRUCK DRIVER CLASSIFICATIONS

GROUP 1: Dump trucks, under 6 yds.; Single unit flat rack (2-axle unit); Nipper truck (when flat rack truck is used appropriate flat rack shall apply); Concrete pump truck (when flat rack truck is used appropriate flat rack shall apply); Concrete pump machine; Fork lift and lift jitneys; Fuel and/or grease truck driver or fuel person; Snow buggy; Steam cleaning; Bus or personhaul driver; Escort or pilot car driver; Pickup truck; Teamster oiler/greaser and/or serviceperson; Hook tender (including loading and unloading); Team driver; Tool room attendant (refineries)

GROUP 2: Dump trucks, 6 yds. and under 8 yds.; Transit mixers, through 10 yds.; Water trucks, under 7,000 gals.; Jetting trucks, under 7,000 gals.; Single-unit flat rack (3-axle unit); Highbed heavy duty transport; Scissor truck; Rubber-tired muck car (not self-loaded); Rubber-tired truck jumbo; Winch truck and "A" frame drivers; Combination winch truck with hoist; Road oil truck or bootperson; Buggymobile; Ross, Hyster and similar straddle carriers; Small rubber-tired tractor

GROUP 3: Dump trucks, 8 yds. and including 24 yds.; Transit mixers, over 10 yds.; Water trucks, 7,000 gals. and over; Jetting trucks, 7,000 gals. and over; Vacuum trucks under

7500 gals. Trucks towing tilt bed or flat bed pull trailers; Lowbed heavy duty transport; Heavy duty transport tiller person; Self- propelled street sweeper with self-contained refuse bin; Boom truck - hydro-lift or Swedish type extension or retracting crane; P.B. or similar type self-loading truck; Tire repairperson; Combination bootperson and road oiler; Dry distribution truck (A bootperson when employed on such equipment, shall receive the rate specified for the classification of road oil trucks or bootperson); Ammonia nitrate distributor, driver and mixer; Snow Go and/or plow

GROUP 4: Dump trucks, over 25 yds. and under 65 yds.; Water pulls - DW 10's, 20's, 21's and other similar equipment when pulling Aqua/pak or water tank trailers; Helicopter pilots (when transporting men and materials); Lowbedk Heavy Duty Transport up to including 7 axles; DW10's, 20's, 21's and other similar Cat type, Terra Cobra, LeTourneau Pulls, Tournorocker, Euclid and similar type equipment when pulling fuel and/or grease tank trailers or other miscellaneous trailers; Vacuum Trucks 7500 gals and over and truck repairman

GROUP 5: Dump trucks, 65 yds. and over; Holland hauler; Low bed Heavy Duty Transport over 7 axles

WELDERS - Receive rate prescribed for craft performing operation to which welding is incidental.

=====

Unlisted classifications needed for work not included within the scope of the classifications listed may be added after award only as provided in the labor standards contract clauses (29CFR 5.5 (a) (1) (ii)).

The body of each wage determination lists the classification and wage rates that have been found to be prevailing for the cited type(s) of construction in the area covered by the wage determination. The classifications are listed in alphabetical order of "identifiers" that indicate whether the particular

rate is union or non-union.

Union Identifiers

An identifier enclosed in dotted lines beginning with characters other than "SU" denotes that the union classification and rate have found to be prevailing for that classification. Example: PLUM0198-005 07/01/2011. The first four letters , PLUM, indicate the international union and the four-digit number, 0198, that follows indicates the local union number or district council number where applicable , i.e., Plumbers Local 0198. The next number, 005 in the example, is an internal number used in processing the wage determination. The date, 07/01/2011, following these characters is the effective date of the most current negotiated rate/collective bargaining agreement which would be July 1, 2011 in the above example.

Union prevailing wage rates will be updated to reflect any changes in the collective bargaining agreements governing the rates.

0000/9999: weighted union wage rates will be published annually each January.

Non-Union Identifiers

Classifications listed under an "SU" identifier were derived from survey data by computing average rates and are not union rates; however, the data used in computing these rates may include both union and non-union data. Example: SULA2004-007 5/13/2010. SU indicates the rates are not union majority rates, LA indicates the State of Louisiana; 2004 is the year of the survey; and 007 is an internal number used in producing the wage determination. A 1993 or later date, 5/13/2010, indicates the classifications and rates under that identifier were issued as a General Wage Determination on that date.

Survey wage rates will remain in effect and will not change until a new survey is conducted.

WAGE DETERMINATION APPEALS PROCESS

1.) Has there been an initial decision in the matter? This can be:

- * an existing published wage determination
- * a survey underlying a wage determination
- * a Wage and Hour Division letter setting forth a position on a wage determination matter
- * a conformance (additional classification and rate) ruling

On survey related matters, initial contact, including requests for summaries of surveys, should be with the Wage and Hour Regional Office for the area in which the survey was conducted because those Regional Offices have responsibility for the Davis-Bacon survey program. If the response from this initial contact is not satisfactory, then the process described in 2.) and 3.) should be followed.

With regard to any other matter not yet ripe for the formal process described here, initial contact should be with the Branch of Construction Wage Determinations. Write to:

Branch of Construction Wage Determinations
Wage and Hour Division
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

2.) If the answer to the question in 1.) is yes, then an interested party (those affected by the action) can request review and reconsideration from the Wage and Hour Administrator (See 29 CFR Part 1.8 and 29 CFR Part 7). Write to:

Wage and Hour Administrator
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

The request should be accompanied by a full statement of the interested party's position and by any information (wage payment data, project description, area practice material, etc.) that the requestor considers relevant to the issue.

3.) If the decision of the Administrator is not favorable, an interested party may appeal directly to the Administrative Review Board (formerly the Wage Appeals Board). Write to:

Administrative Review Board

U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

4.) All decisions by the Administrative Review Board are final.

=====

END OF GENERAL DECISION

EXHIBIT A

**CONTRACTOR'S BID AND BID PRICE SCHEDULE
FRANCISCO DRIVE RIGHT-TURN POCKET
CONTRACT NO. PW 14-31068 / CIP NO. 71358**

ITEM NO.	ITEM CODE	ITEM DESCRIPTION	UNIT OF MEASURE	ESTIMATED QUANTITY	UNIT PRICE (IN FIGURES)	ITEM TOTAL (IN FIGURES)
1	080050	PROGRESS SCHEDULE (Critical Path Method)	LS	1		
2	P 120090	CONSTRUCTION AREA SIGNS	LS	1		
3	120100	TRAFFIC CONTROL SYSTEM	LS	1		
4	120149	TEMPORARY PAVEMENT MARKINGS (Paint)	SF	113		
5	120159	TEMPORARY TRAFFIC STRIPE (Paint)	LF	1,977		
6	120300	TEMPORARY PAVEMENT MARKER	EA	56		
7	129000	TEMPORARY RAILING (Type K)	LF	957		
8	129110A	TEMPORARY CRASH CUSHION (ABSORB 350)	EA	1		
9	130100	JOB SITE MANAGEMENT	LS	1		
10	130300	PREPARE STORM WATER POLLUTION PREVENTION PLAN	LS	1		
11	149001A	PREPARE FUGITIVE DUST PLAN	LS	1		
12	150606	REMOVE FENCE (Type BW)	LF	315		
13	150714	REMOVE THERMOPLASTIC TRAFFIC STRIPE	LF	4,326		

ITEM NO.	ITEM CODE	ITEM DESCRIPTION	UNIT OF MEASURE	ESTIMATED QUANTITY	UNIT PRICE (IN FIGURES)	ITEM TOTAL (IN FIGURES)
14	150715	REMOVE THERMOPLASTIC PAVEMENT MARKING	SF	94		
15	150722	REMOVE PAVEMENT MARKER	EA	89		
16	151284	SALVAGE ROADSIDE SIGN (Wood Post)	EA	3		
17	152441A	ADJUST WATER VALVE FRAME AND COVER TO GRADE	EA	7		
18	152451A	ADJUST WATER BLOW-OFF TO GRADE	EA	1		
19	153103A	COLD PLANE ASPHALT CONCRETE PAVEMENT	SF	23,157		
20	160102	CLEARING AND GRUBBING	LS	1		
21	F 190101	ROADWAY EXCAVATION	CY	1,364		
22	190185A	SHOULDER BACKING	CY	24		
23	260203	CLASS 2 AGGREGATE BASE	CY	1,074		
24	260203A	GRAVEL (MISCELLANEOUS AREAS)	CF	3,173		
25	374207	CRACK TREATMENT	LNMI	0.6		
26	377501A	TYPE II SLURRY SEAL	SY	5,229		
27	390132	HOT MIX ASPHALT (Type A)	TON	1,521		
28	566011	ROADSIDE SIGN-ONE POST	EA	12		
29	731626A	MINOR CONCRETE (Curb & Curb Ramp)	EA	1		

ITEM NO.	ITEM CODE		ITEM DESCRIPTION	UNIT OF MEASURE	ESTIMATED QUANTITY	UNIT PRICE (IN FIGURES)	ITEM TOTAL (IN FIGURES)
30	P	800002A	SPLIT RAIL FENCE	LF	302		
31		840502A	THERMOPLASTIC TRAFFIC STRIPE (SPRAYABLE-ENHANCED WET NIGHT VISIBILITY)	LF	8,250		
32		846012	THERMOPLASTIC CROSSWALK & PAVEMENT MARKING (ENHANCED WET NIGHT VISIBILITY)	SF	1,616		
33		850111	PAVEMENT MARKER (Retroreflective)	EA	215		
34		999990	MOBILIZATION	LS	1		

(F) Final Pay Quantity

(P) Eligible for Partial Payment

TOTAL BID \$ _____

**PROPOSAL PAY ITEMS AND BID PRICE SCHEDULE
FRANCISCO DRIVE RIGHT-TURN POCKET
CONTRACT NO. PW 14-3108 / CIP NO. 71358**

ITEM NO.	ITEM CODE	ITEM DESCRIPTION	UNIT OF MEASURE	ESTIMATED QUANTITY	UNIT PRICE (IN FIGURES)	ITEM TOTAL (IN FIGURES)
1	080050	PROGRESS SCHEDULE (Critical Path Method)	LS	1		
2	P 120090	CONSTRUCTION AREA SIGNS	LS	1		
3	120100	TRAFFIC CONTROL SYSTEM	LS	1		
4	120149	TEMPORARY PAVEMENT MARKINGS (Paint)	SF	113		
5	120159	TEMPORARY TRAFFIC STRIPE (Paint)	LF	1,977		
6	120300	TEMPORARY PAVEMENT MARKER	EA	56		
7	129000	TEMPORARY RAILING (Type K)	LF	957		
8	129110A	TEMPORARY CRASH CUSHION (ABSORB 350)	EA	1		
9	130100	JOB SITE MANAGEMENT	LS	1		
10	130300	PREPARE STORM WATER POLLUTION PREVENTION PLAN	LS	1		
11	149001A	PREPARE FUGITIVE DUST PLAN	LS	1		
12	150606	REMOVE FENCE (Type BW)	LF	315		
13	150714	REMOVE THERMOPLASTIC TRAFFIC STRIPE	LF	4,326		
14	150715	REMOVE THERMOPLASTIC PAVEMENT MARKING	SF	94		
15	150722	REMOVE PAVEMENT MARKER	EA	89		
16	151284	SALVAGE ROADSIDE SIGN (Wood Post)	EA	3		

ITEM NO.	ITEM CODE	ITEM DESCRIPTION	UNIT OF MEASURE	ESTIMATED QUANTITY	UNIT PRICE (IN FIGURES)	ITEM TOTAL (IN FIGURES)
17	152441A	ADJUST WATER VALVE FRAME AND COVER TO GRADE	EA	7		
18	152451A	ADJUST WATER BLOW-OFF TO GRADE	EA	1		
19	153103A	COLD PLANE ASPHALT CONCRETE PAVEMENT	SF	23,157		
20	160102	CLEARING AND GRUBBING	LS	1		
21	F 190101	ROADWAY EXCAVATION	CY	1,364		
22	190185A	SHOULDER BACKING	CY	24		
23	260203	CLASS 2 AGGREGATE BASE	CY	1,074		
24	260203A	GRAVEL (MISCELLANEOUS AREAS)	CF	3,173		
25	374207	CRACK TREATMENT	LNMI	0.6		
26	377501A	TYPE II SLURRY SEAL	SY	5,229		
27	390132	HOT MIX ASPHALT (Type A)	TON	1,521		
28	566011	ROADSIDE SIGN-ONE POST	EA	12		
29	731626A	MINOR CONCRETE (Curb & Curb Ramp)	EA	1		
30	P 800002A	SPLIT RAIL FENCE	LF	302		
31	840502A	THERMOPLASTIC TRAFFIC STRIPE (SPRAYABLE-ENHANCED WET NIGHT VISIBILITY)	LF	8,250		
32	846012	THERMOPLASTIC CROSSWALK & PAVEMENT MARKING (ENHANCED WET NIGHT VISIBILITY)	SF	1,616		
33	850111	PAVEMENT MARKER (Retroreflective)	EA	215		

ITEM NO.	ITEM CODE		ITEM DESCRIPTION	UNIT OF MEASURE	ESTIMATED QUANTITY	UNIT PRICE (IN FIGURES)	ITEM TOTAL (IN FIGURES)
34		999990	MOBILIZATION	LS	1		


(F) Final Pay Quantity

(P) Eligible for Partial Payment


TOTAL BID \$ _____

(NOTICE: Bidders failure to execute the questionnaires and statements contained in this proposal as required by applicable laws and regulations, or the determinations by County of El Dorado based upon those questionnaires and statements, may prohibit award of the subject Contract to the bidder.)


ORIGINAL SCALE IS IN INCHES
 Drawing name: C:\Civil_3D\Projects\71358_Francisco Dr Right-Turn Pocket\CADD_Files\Sheets\C-1.dwg Layout Tab: C-1 Oct 08/2014 - 1:33pm Anruyen
 FOR REDUCED PLANS
 2
 1
 0

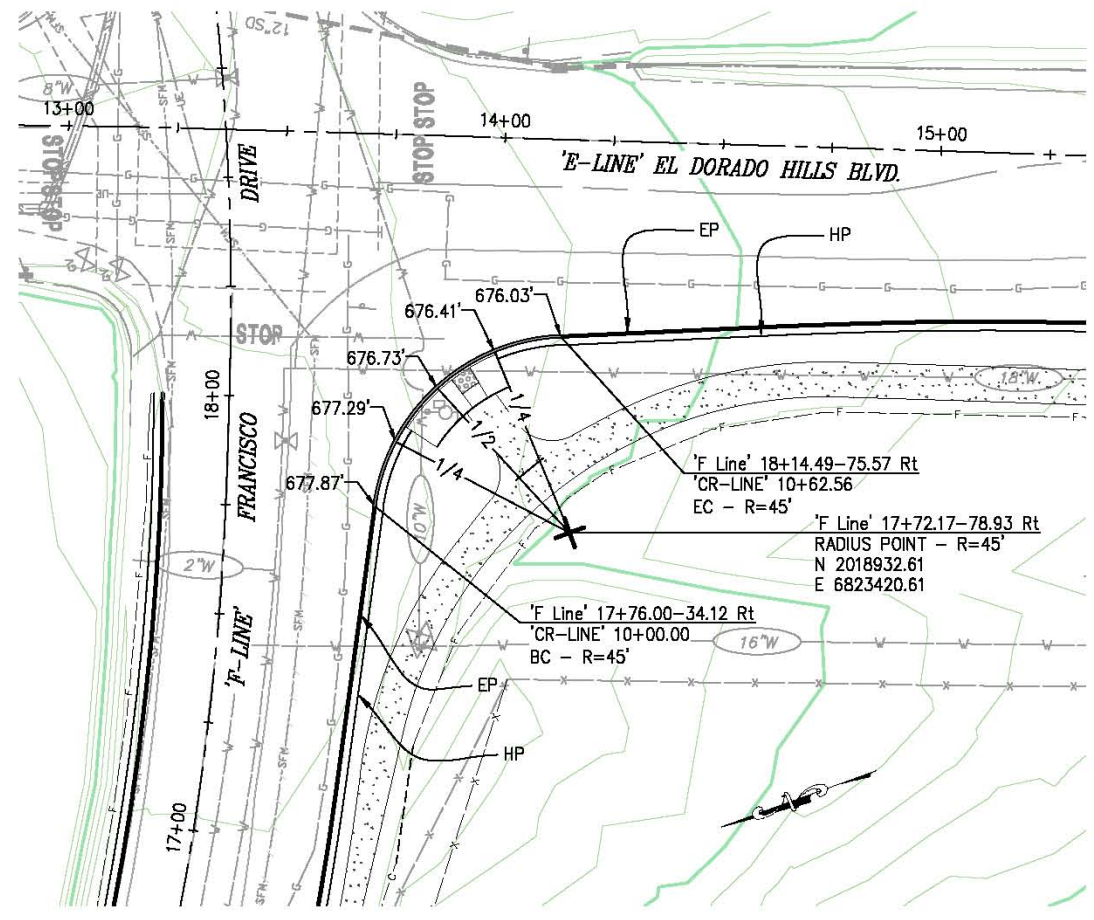


1 CURVE RETURN DETAIL
SCALE: 1" = 20'

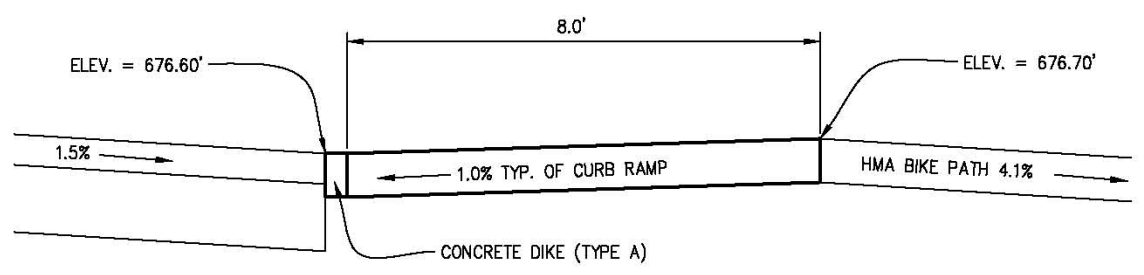

CENTERLINE OF CURB RAMP
NO SCALE

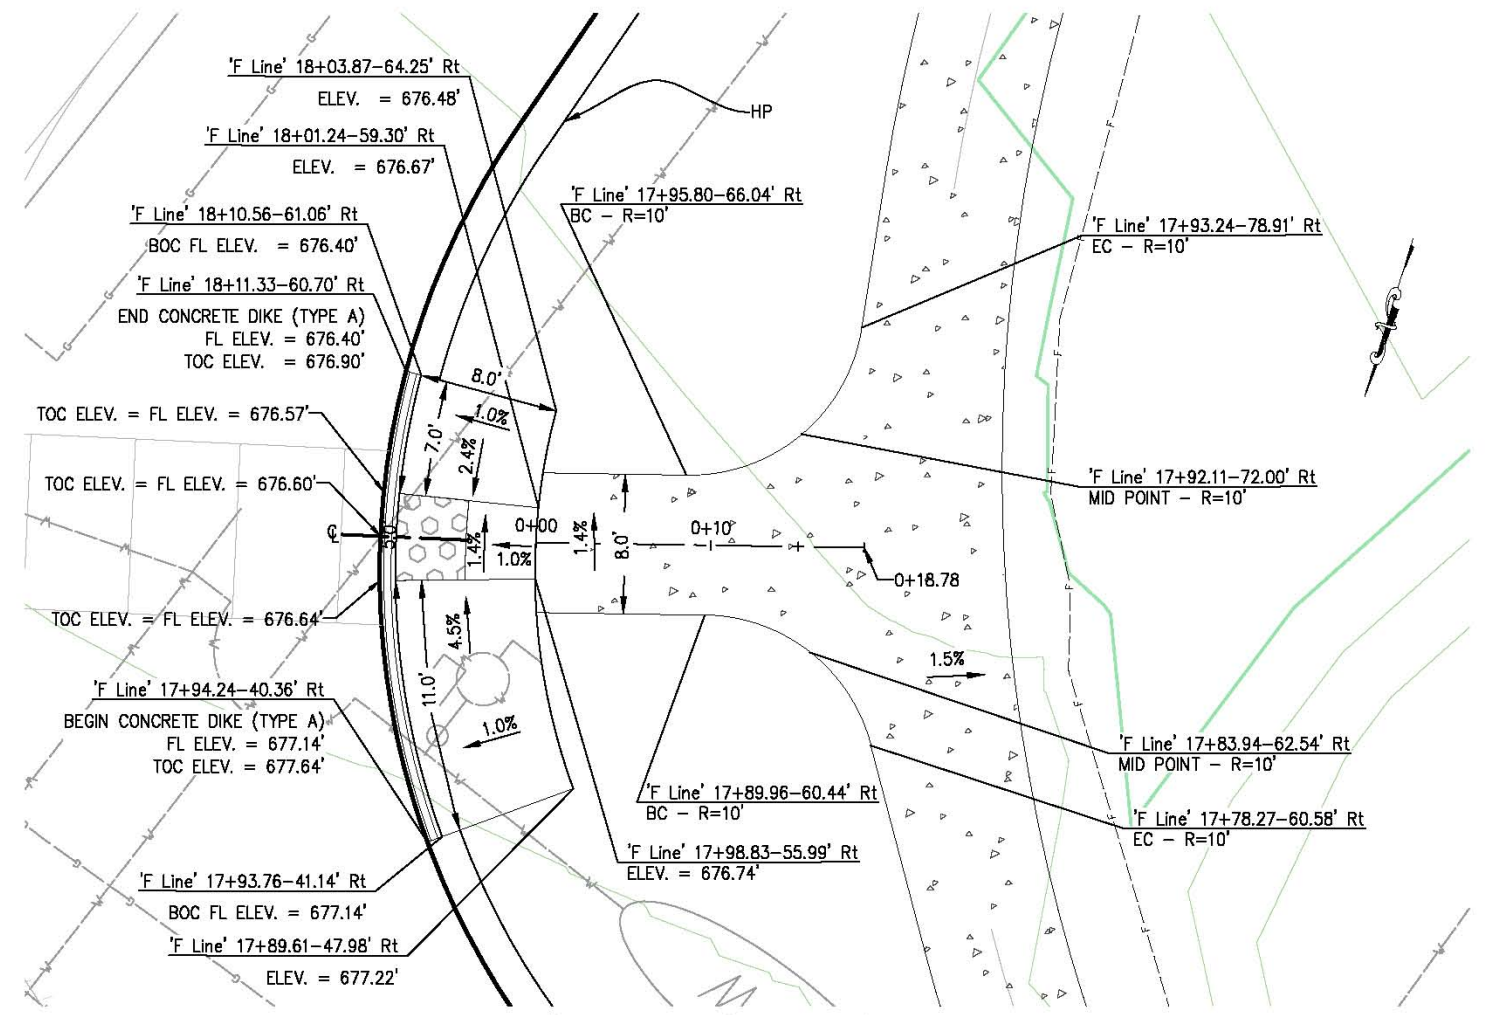

2 BIKE PATH & CURB RAMP CONNECTION DETAIL
SCALE: 1" = 5'

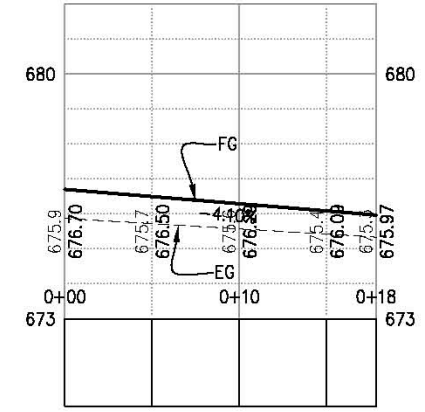

REVISED SHEET
CONSTRUCTION DETAILS
SCALE : AS SHOWN

REVISION	DATE	DESCRIPTION	BY
1	10/8/14	REPLACE THIS SHEET	AB



PREPARED UNDER THE SUPERVISION OF:
Adam J. Bane
 REGISTERED CIVIL ENGINEER
 09/09/14
 DATE:

DESIGNED: AN
 DRAWN: AN
 CHECKED: AB
 DATE: 08/21/2014
 ROAD NUMBER: 5



COUNTY OF EL DORADO
 COMMUNITY DEVELOPMENT AGENCY
 TRANSPORTATION DIVISION


FRANCISCO DRIVE RIGHT-TURN POCKET

SHEET
C-1r
 11 of 19
 W.D. No. 71358



REVISION	
NUMBER	DATE
1	10/8/14 REPLACE THIS SHEET

DESIGNED BY: AN	CHECKED BY: AB
DRAWN BY: AN	DATE: 08/21/2014
ROAD NUMBER: 5	

REGISTERED PROFESSIONAL ENGINEER	ADAM J. BEANE
No. 0081363	08-01-13
REGISTERED CIVIL ENGINEER	DATE: 09/09/14

PREPARED UNDER THE SUPERVISION OF:	REGISTERED CIVIL ENGINEER
	


COUNTY OF EL DORADO COMMUNITY DEVELOPMENT AGENCY TRANSPORTATION DIVISION	
FRANCISCO DRIVE RIGHT-TURN POCKET	
SHEET	L-1r
OF	5 OF 19
FILE NO.	71358

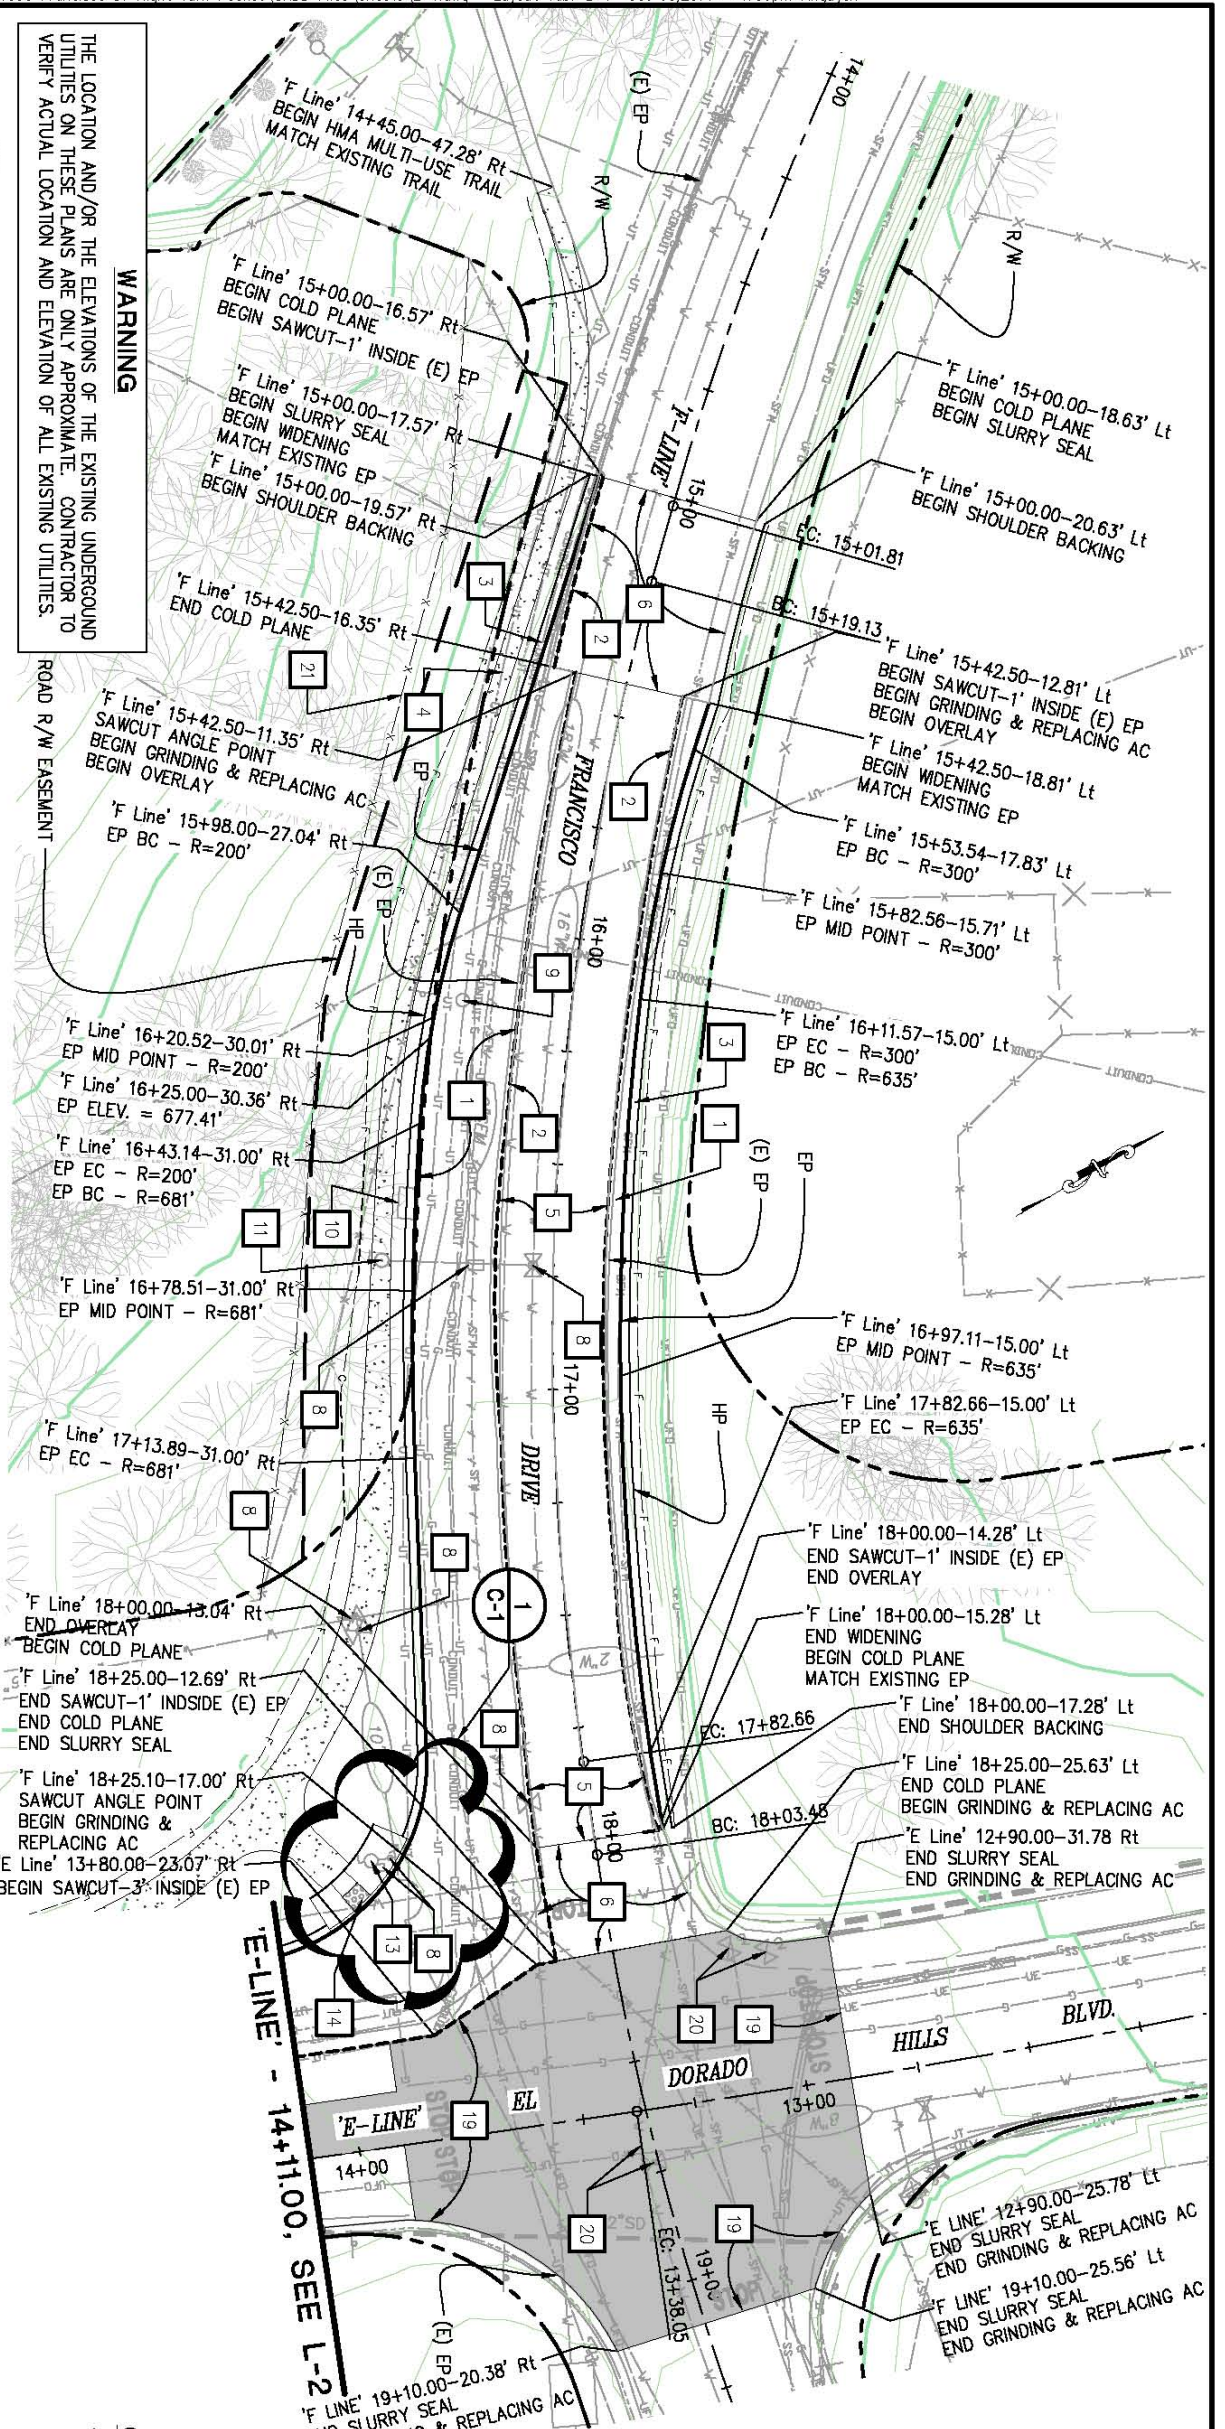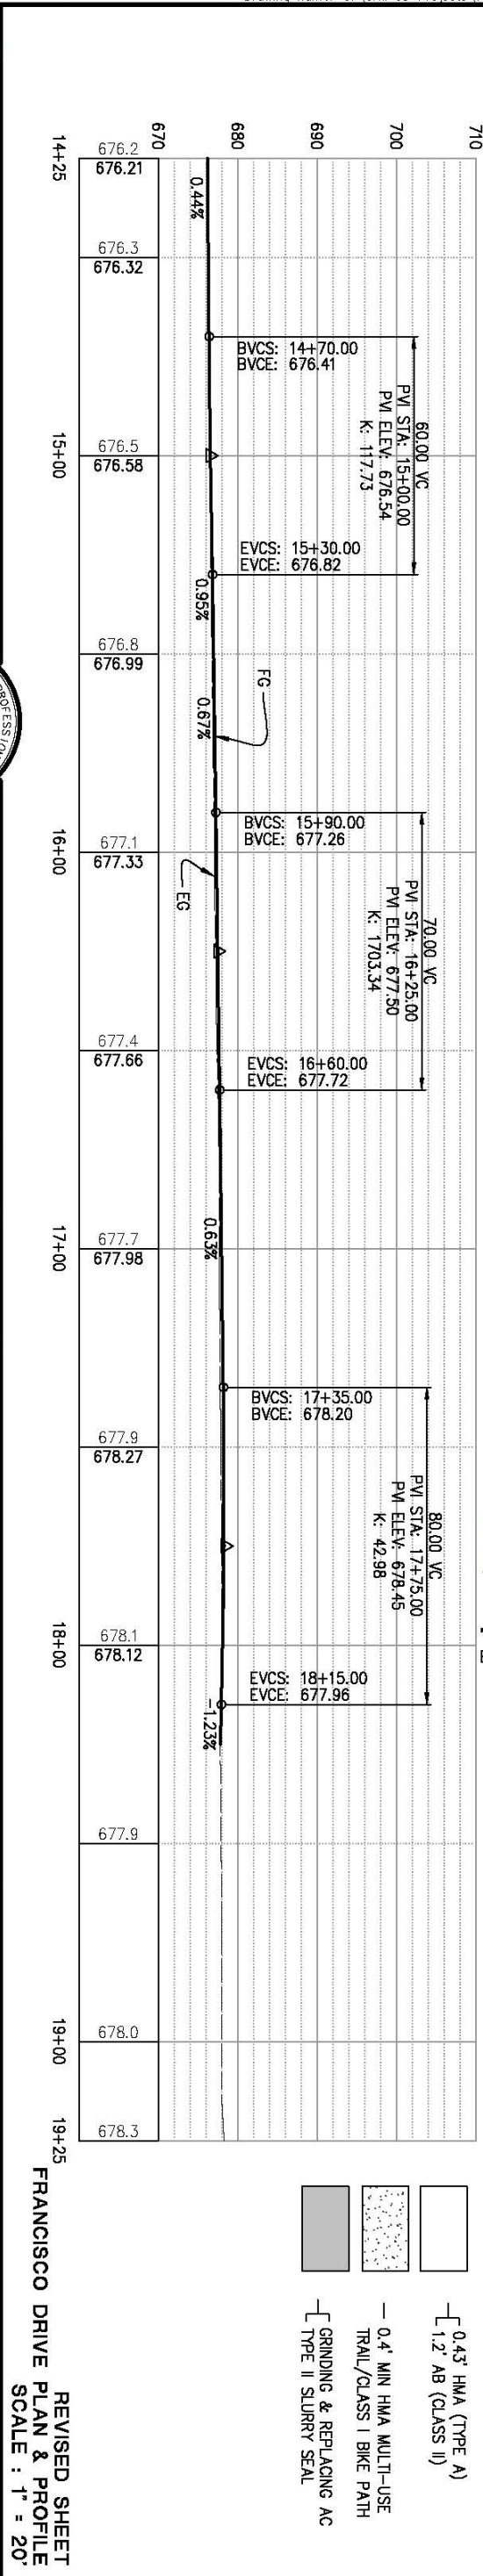

- GENERAL NOTES:**
- APPLY 0.2" MIN GRAVEL TO ALL DISTURBED AREAS. SEE SHEETS X-1 & X-2 FOR DETAILS.
- LEGEND**
- 0.43' HMA (TYPE A)
 - 1.2' AB (CLASS II)
 - 0.4' MIN HMA MULTI-USE TRAIL/CLASS I BIKE PATH
 - GRINDING & REPLACING AC
 - GRIND DOWN AND REPLACE EXISTING AC (0.23") LIMITS TO BE DEFINED BY THE ENGINEER. SEE DETAIL 6 ON SHEET C-2 TYPE II SLURRY SEAL
 - VALVE TO BE PROTECTED IN-PLACE
 - SPLIT RAIL WOOD FENCE. SEE SHEET HP-1 FOR DETAILS
 - GRIND DOWN AND REPLACE EXISTING AC (0.23") LIMITS TO BE DEFINED BY THE ENGINEER. SEE DETAIL 6 ON SHEET C-2 TYPE II SLURRY SEAL
 - CONCRETE CURB RAMP (CASE C). SEE 2010 CALTRANS STANDARD PLAN AB8A & SHEET C-1
 - WATER BLOW-OFF TO BE ADJUSTED TO GRADE DURING CONSTRUCTION BY CONTRACTOR
 - VAULT VENT & SIGN TO BE RELOCATED BEHIND THE PROPOSED BIKE TRAIL PRIOR TO CONSTRUCTION BY E.I.D.
 - UNKNOWN VAULT TO BE DEMOLISHED DURING CONSTRUCTION BY CONTRACTOR
 - FINISH GRADE DURING CONSTRUCTION BY AT&T
 - TELEPHONE MANHOLE TO BE ADJUSTED TO GRADE DURING CONSTRUCTION BY CONTRACTOR
 - WATER VALVE FRAME & COVER TO BE ADJUSTED TO GRADE DURING CONSTRUCTION BY CONTRACTOR
 - COLD PLANE. SEE DETAIL 5 ON SHEET C-2 TYPE II SLURRY SEAL
 - GRIND DOWN & REPLACE EXISTING AC (0.23") TYPE II SLURRY SEAL
 - 0.2" HMA OVERLAY
 - TYPE II SLURRY SEAL
 - TYPE II SLURRY SEAL
 - 0.43' HMA (TYPE A)
 - 1.2' AB (CLASS II)
 - SAWCUT TO A CLEAN UNIFORM LINE AS SHOWN ON THE PLAN. SEE DETAIL 3 & 4 ON SHEET C-2
 - 0.2' MIN AB (CLASS II) SHOULDER BACKING
 - BIKE PATH. SEE SHEETS L-4 & L-5 FOR DETAILS
 - GRIND DOWN & REPLACE EXISTING AC (0.23") TYPE II SLURRY SEAL
- CONSTRUCTION NOTES:**
- 0.43' HMA (TYPE A)
 - 1.2' AB (CLASS II)
 - SAWCUT TO A CLEAN UNIFORM LINE AS SHOWN ON THE PLAN. SEE DETAIL 3 & 4 ON SHEET C-2
 - 0.2' MIN AB (CLASS II) SHOULDER BACKING
 - BIKE PATH. SEE SHEETS L-4 & L-5 FOR DETAILS
 - GRIND DOWN & REPLACE EXISTING AC (0.23") TYPE II SLURRY SEAL
 - 0.2" HMA OVERLAY
 - TYPE II SLURRY SEAL
 - COLD PLANE. SEE DETAIL 5 ON SHEET C-2 TYPE II SLURRY SEAL
 - WATER VALVE FRAME & COVER TO BE ADJUSTED TO GRADE DURING CONSTRUCTION BY CONTRACTOR
 - TELEPHONE MANHOLE TO BE ADJUSTED TO GRADE DURING CONSTRUCTION BY CONTRACTOR
 - UNKNOWN VAULT TO BE DEMOLISHED DURING CONSTRUCTION BY CONTRACTOR
 - FINISH GRADE DURING CONSTRUCTION BY AT&T
 - VAULT VENT & SIGN TO BE RELOCATED BEHIND THE PROPOSED BIKE TRAIL PRIOR TO CONSTRUCTION BY E.I.D.
 - WATER BLOW-OFF TO BE ADJUSTED TO GRADE DURING CONSTRUCTION BY CONTRACTOR
 - CONCRETE CURB RAMP (CASE C). SEE 2010 CALTRANS STANDARD PLAN AB8A & SHEET C-1
 - GRIND DOWN AND REPLACE EXISTING AC (0.23") LIMITS TO BE DEFINED BY THE ENGINEER. SEE DETAIL 6 ON SHEET C-2 TYPE II SLURRY SEAL
 - VALVE TO BE PROTECTED IN-PLACE
 - SPLIT RAIL WOOD FENCE. SEE SHEET HP-1 FOR DETAILS

REVISED SHEET
 FRANCISCO DRIVE PLAN & PROFILE
 SCALE: 1" = 20'

ORIGINAL SCALE IS IN INCHES
 Drawing name: C:\Civil_3D\Projects\71358_Francisco Dr Right Turn Pocket\CADD_Files\Sheets\SPD-1.dwg Layout: Tab: SPD-1 Oct 08, 2014 - 1:35pm Arnaven
 FOR REDUCED PLANS
 2
 1
 0

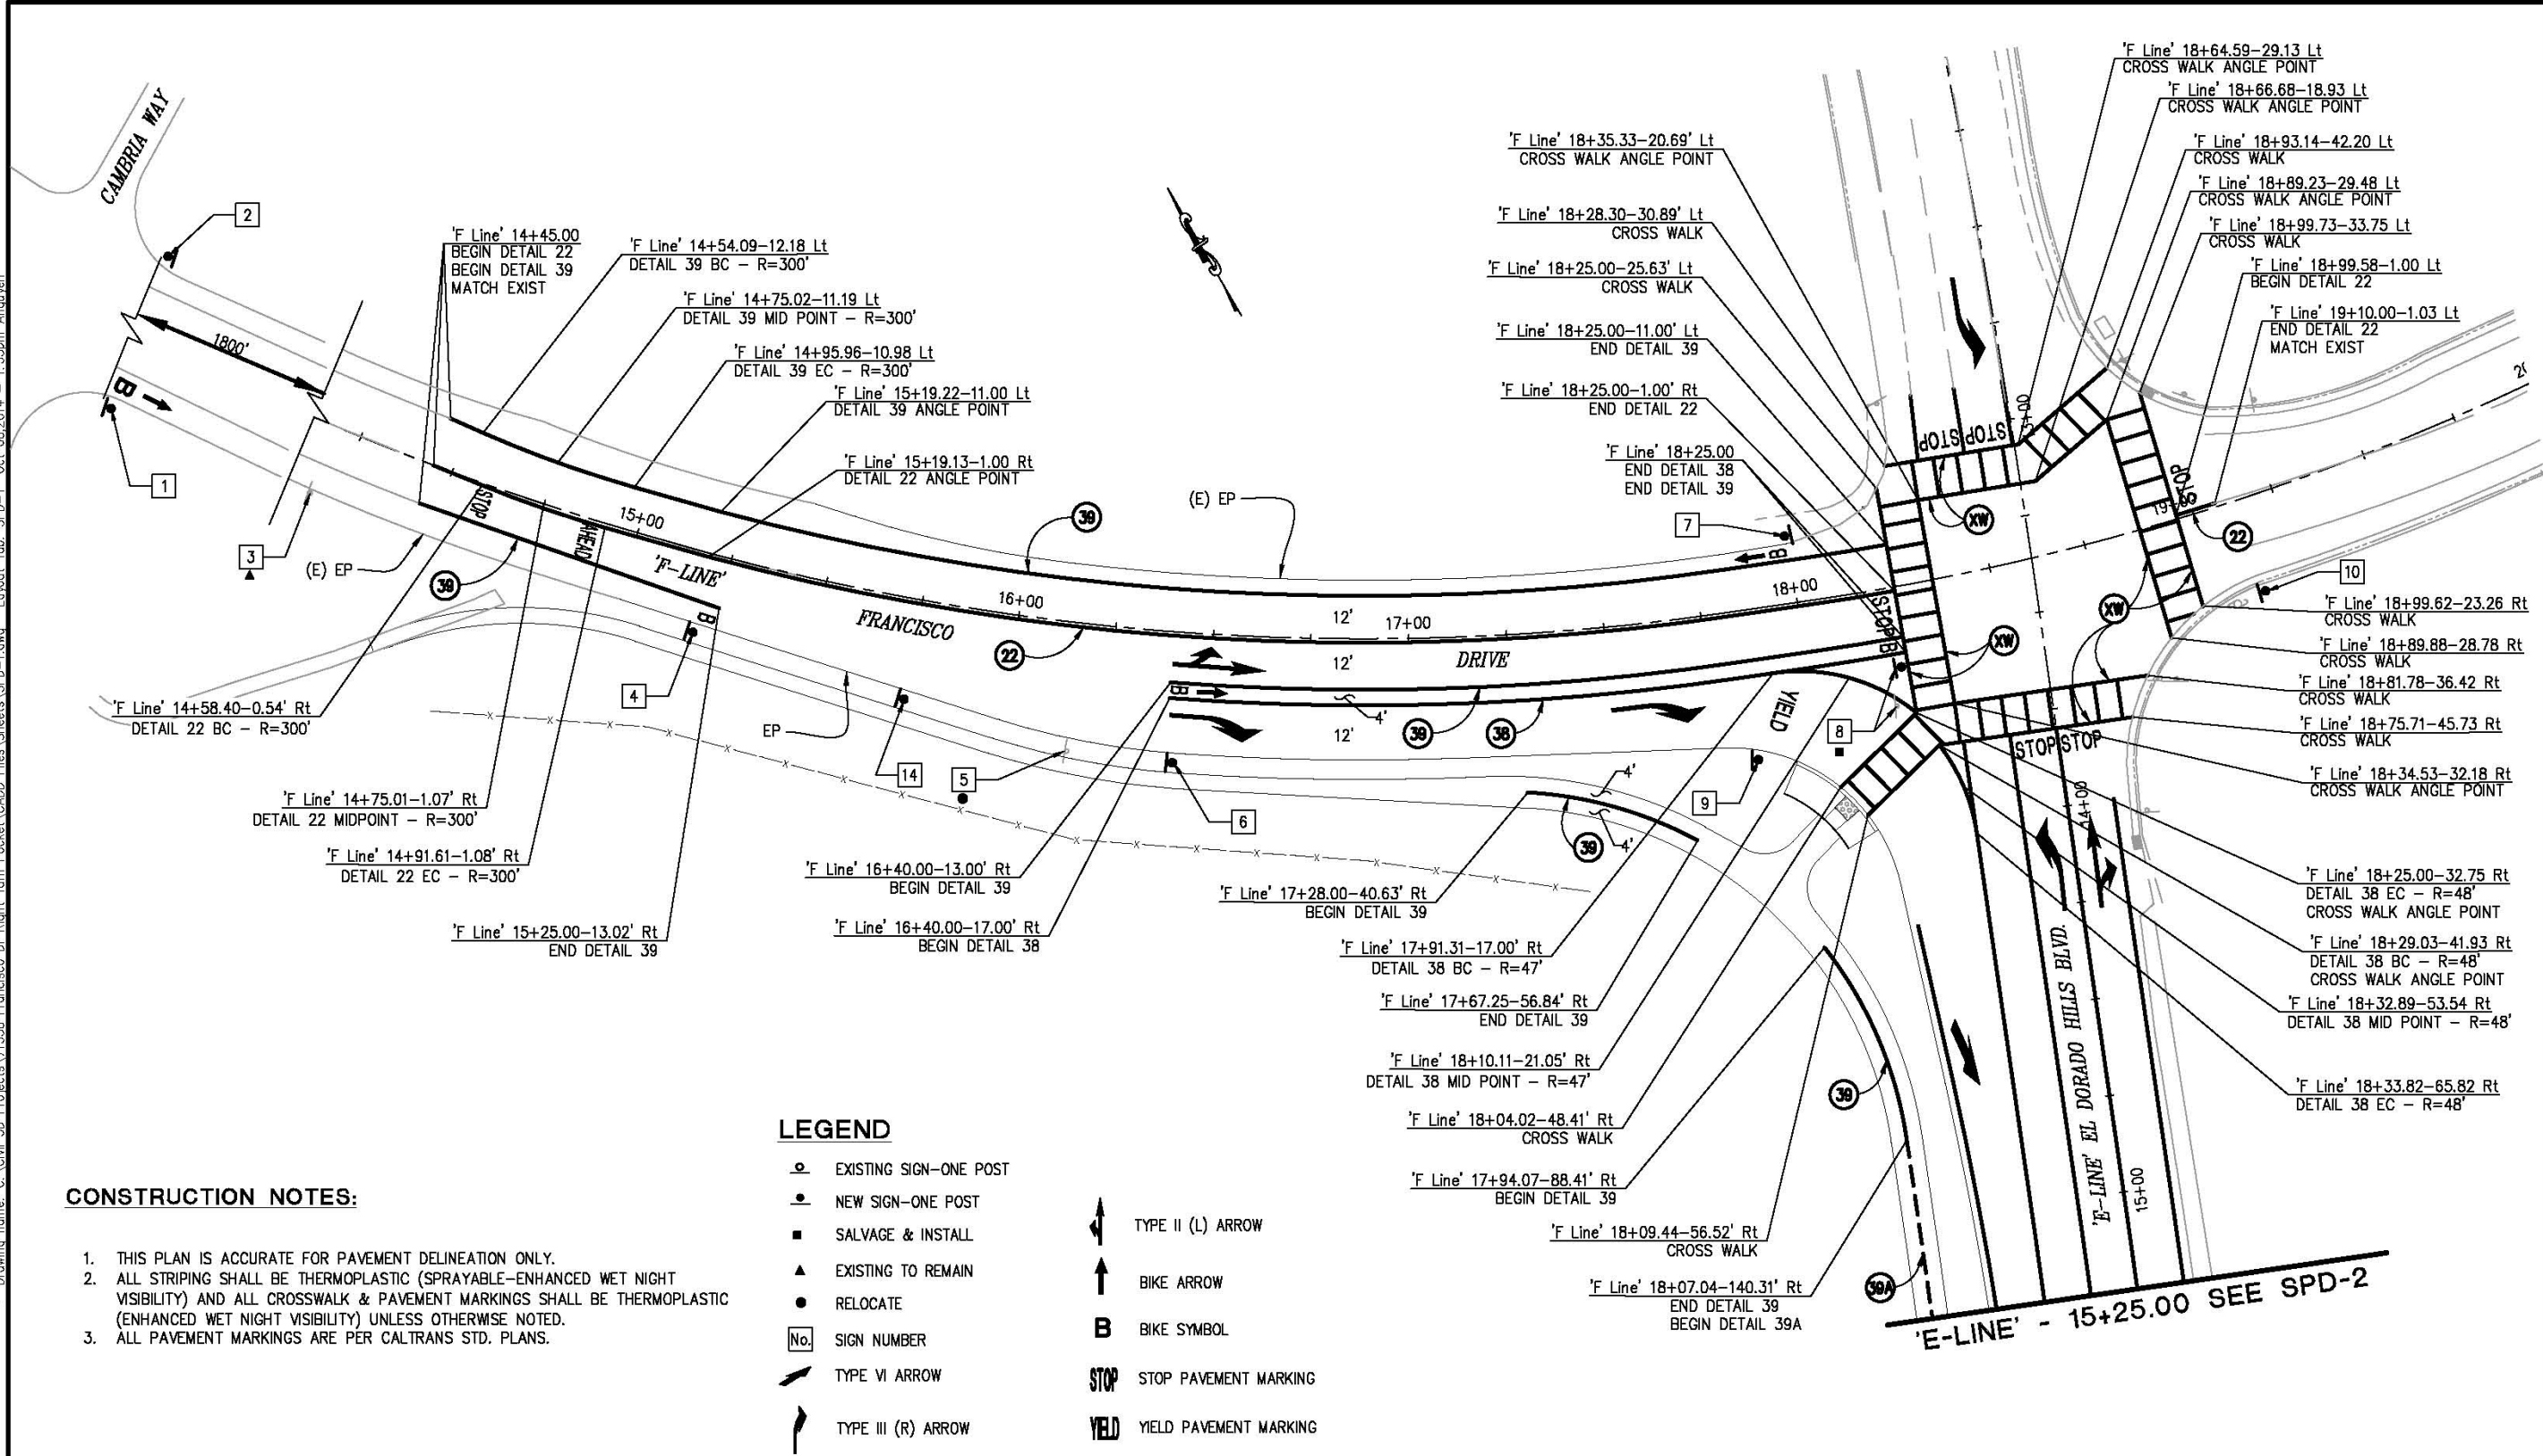

CONSTRUCTION NOTES:

1. THIS PLAN IS ACCURATE FOR PAVEMENT DELINEATION ONLY.
2. ALL STRIPING SHALL BE THERMOPLASTIC (SPRAYABLE-ENHANCED WET NIGHT VISIBILITY) AND ALL CROSSWALK & PAVEMENT MARKINGS SHALL BE THERMOPLASTIC (ENHANCED WET NIGHT VISIBILITY) UNLESS OTHERWISE NOTED.
3. ALL PAVEMENT MARKINGS ARE PER CALTRANS STD. PLANS.

LEGEND

- EXISTING SIGN-ONE POST
- NEW SIGN-ONE POST
- SALVAGE & INSTALL
- ▲ EXISTING TO REMAIN
- RELOCATE
- No. SIGN NUMBER
- ↙ TYPE VI ARROW
- ↘ TYPE III (R) ARROW
- ↖ TYPE II (L) ARROW
- ↗ BIKE ARROW
- B BIKE SYMBOL
- STOP STOP PAVEMENT MARKING
- YIELD YIELD PAVEMENT MARKING

REVISED SHEET
 FRANCISCO DRIVE PAVEMENT DELINEATION & SIGNS
 SCALE : 1" = 20'

REVISION	DATE	DESCRIPTION	BY
1	10/8/14	REPLACE THIS SHEET	AB



PREPARED UNDER THE SUPERVISION OF:
Adam J. Bane
 REGISTERED CIVIL ENGINEER
 09/09/14
 DATE:

DESIGNED: AN
 DRAWN: AN
 CHECKED: AB
 DATE: 08/21/2014
 ROAD NUMBER: 5




COUNTY OF EL DORADO
 COMMUNITY DEVELOPMENT AGENCY
 TRANSPORTATION DIVISION

FRANCISCO DRIVE RIGHT-TURN POCKET

SHEET
 SPD-1r
 16 OF 19
 W.D. No. 71358

ORIGINAL SCALE IS IN INCHES
 Drawing name: C:\Civil_3D\Projects\71358_Francisco Dr Right-Turn Pocket\CADD_Files\Sheets\SPD-2.dwg Layout Tab: SPD-2 - Oct 09, 2014 - 1:37pm - Anquyen

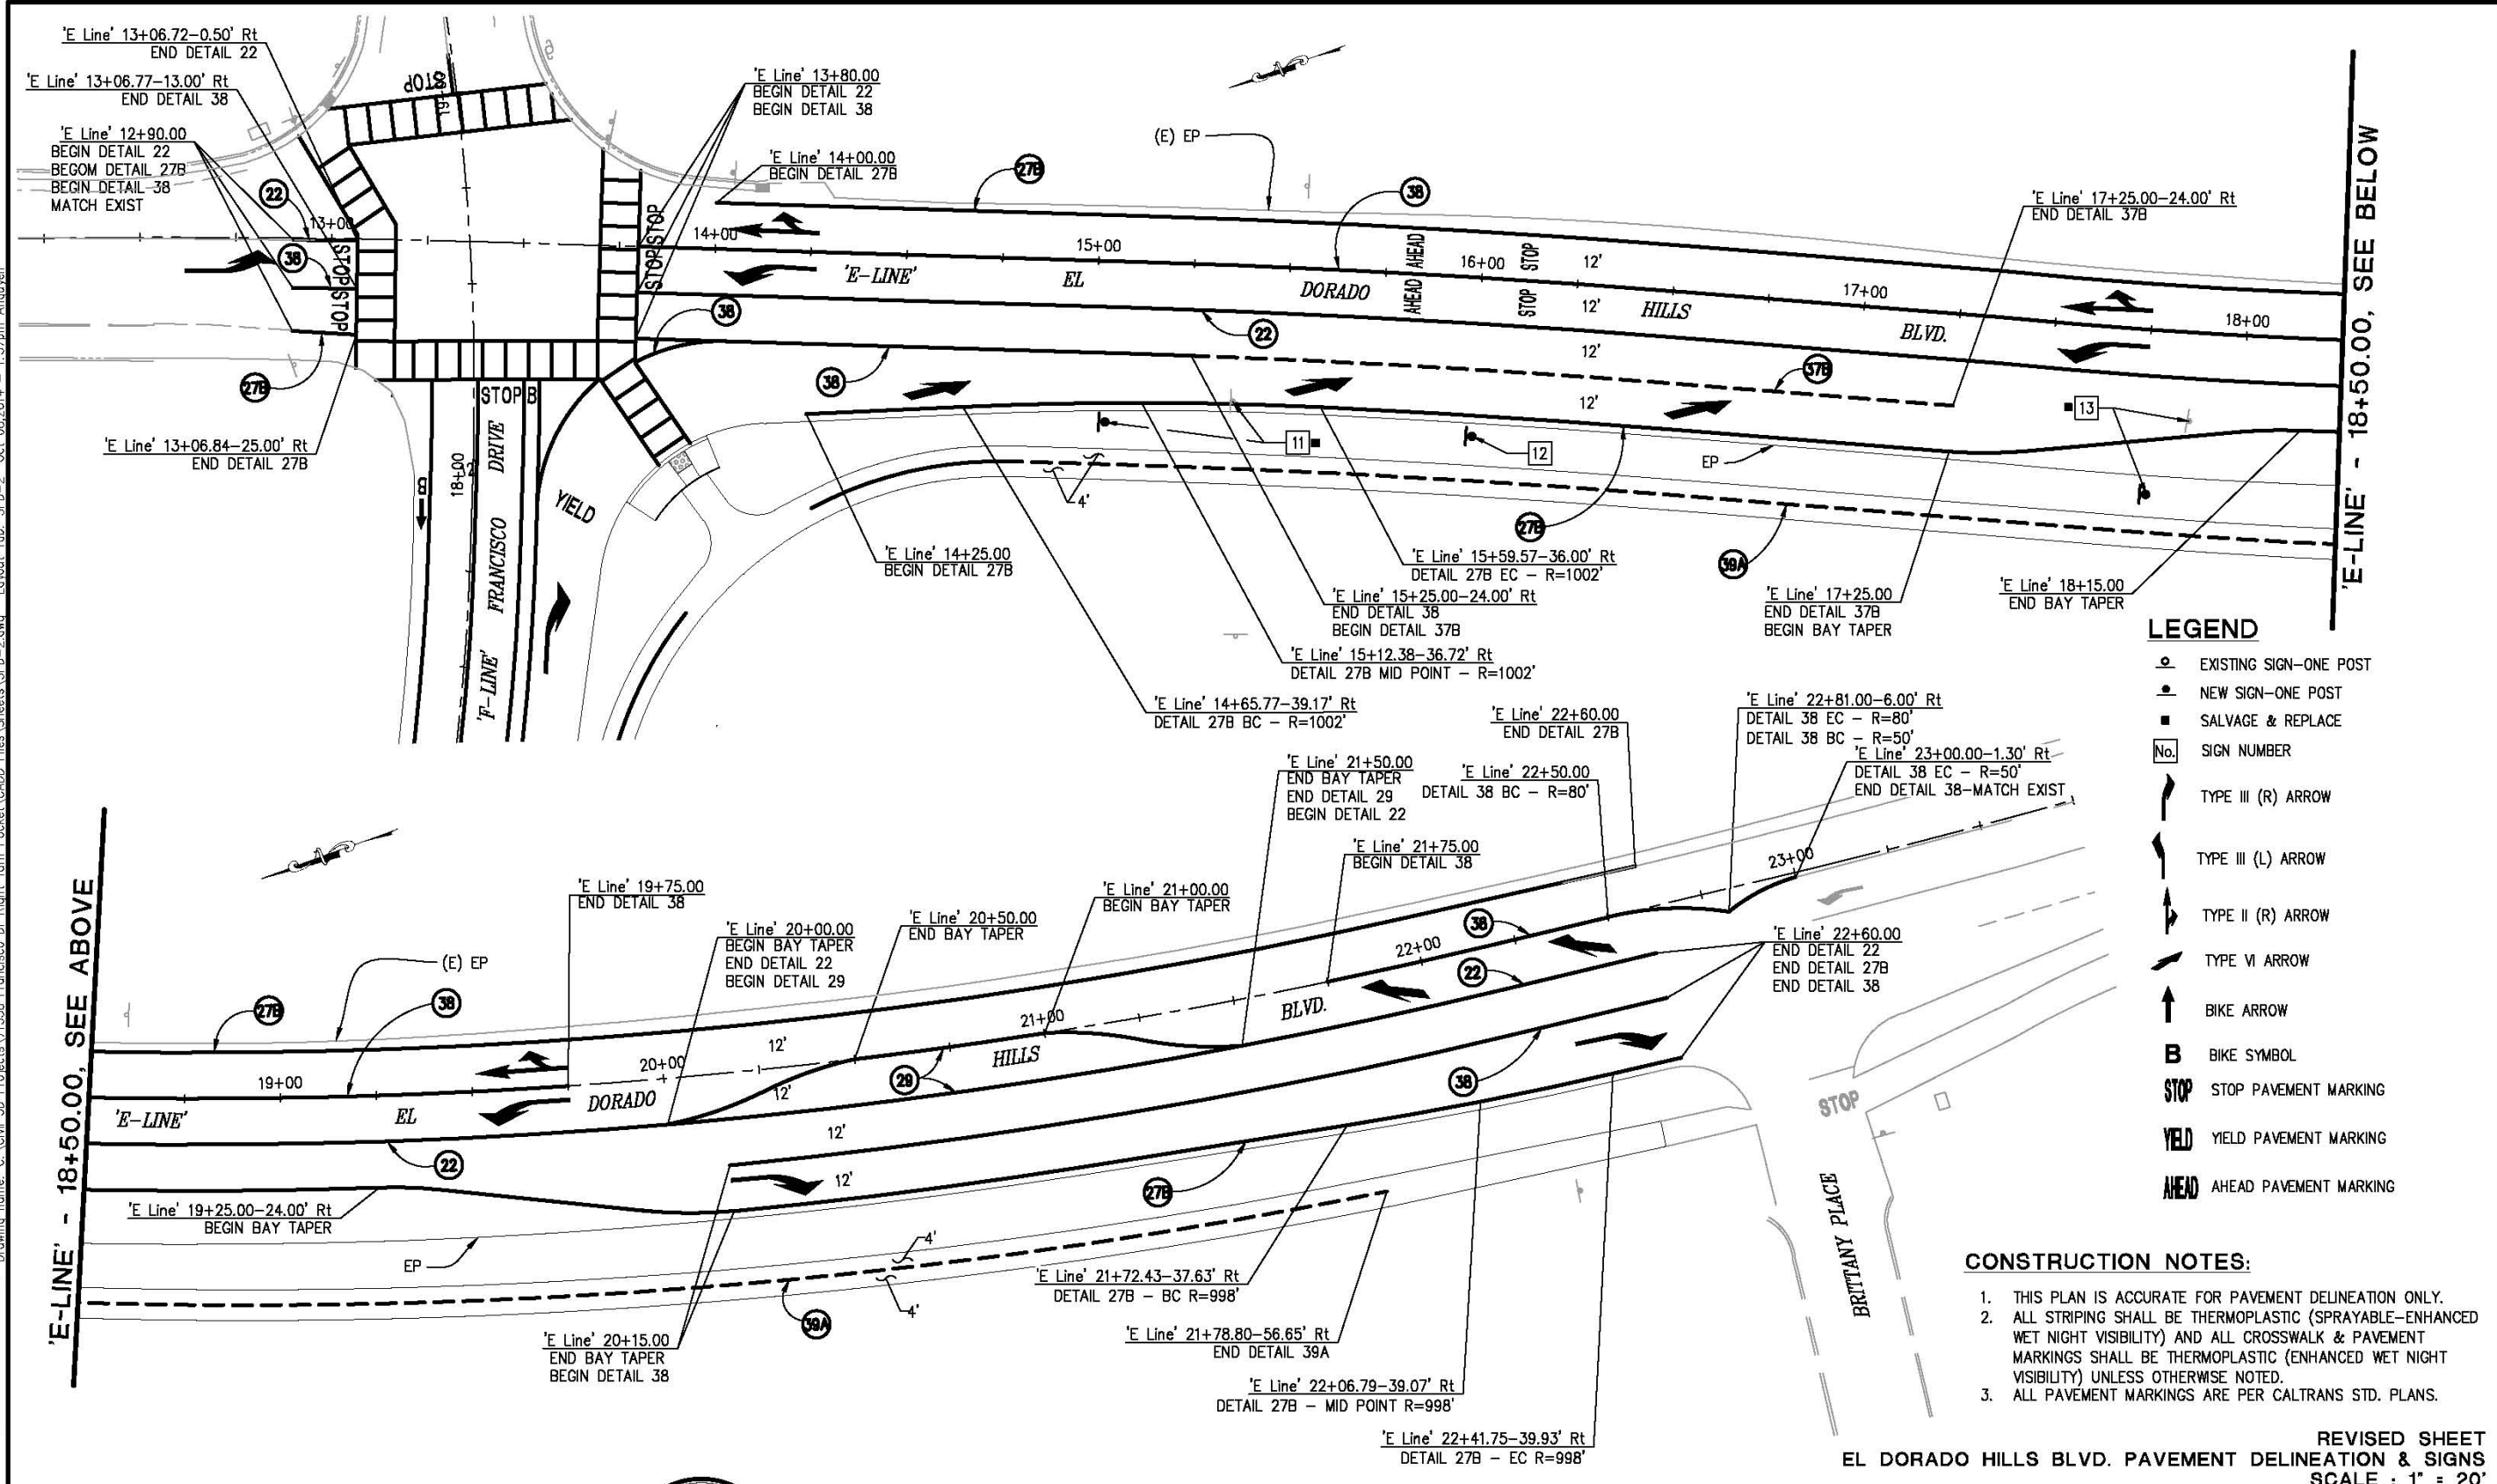

- ### LEGEND
- EXISTING SIGN-ONE POST
 - NEW SIGN-ONE POST
 - SALVAGE & REPLACE
 - No. SIGN NUMBER
 - ↗ TYPE III (R) ARROW
 - ↖ TYPE III (L) ARROW
 - ↘ TYPE II (R) ARROW
 - ↙ TYPE VI ARROW
 - ↑ BIKE ARROW
 - B BIKE SYMBOL
 - STOP STOP PAVEMENT MARKING
 - YIELD YIELD PAVEMENT MARKING
 - AHEAD AHEAD PAVEMENT MARKING

- ### CONSTRUCTION NOTES:
- THIS PLAN IS ACCURATE FOR PAVEMENT DELINEATION ONLY.
 - ALL STRIPING SHALL BE THERMOPLASTIC (SPRAYABLE-ENHANCED WET NIGHT VISIBILITY) AND ALL CROSSWALK & PAVEMENT MARKINGS SHALL BE THERMOPLASTIC (ENHANCED WET NIGHT VISIBILITY) UNLESS OTHERWISE NOTED.
 - ALL PAVEMENT MARKINGS ARE PER CALTRANS STD. PLANS.

REVISED SHEET
 EL DORADO HILLS BLVD. PAVEMENT DELINEATION & SIGNS
 SCALE : 1" = 20'

REVISION	DATE	DESCRIPTION	BY
1	10/8/14	REPLACE THIS SHEET	AB



PREPARED UNDER THE SUPERVISION OF:
Adam J. Bane
 REGISTERED CIVIL ENGINEER
 09/09/14

DESIGNED: AN
 DRAWN: AN
 CHECKED: AB
 DATE: 08/21/2014
 ROAD NUMBER: 5



COUNTY OF EL DORADO
 COMMUNITY DEVELOPMENT AGENCY
 TRANSPORTATION DIVISION

FRANCISCO DRIVE RIGHT-TURN POCKET

SHEET
 SPD-2r
 17 of 19
 W.D. No. 71358

ORIGINAL SCALE IS IN INCHES
 Drawing name: C:\Civil_3D\Projects\71358_Francisco Dr. Right_Turn_Pocket\CADD_Files\Sheets\SPD-3.dwg Layout Tab: SPD-3 - 1:35pm Auguyen
 FOR REDUCED PLANS
 0 1 2

ROADSIDE SIGNS

SIGN NO.	SIGN	CODE	ROADSIDE SIGN			EXISTING LOCATION	PROPOSED LOCATION (APPROXIMATELY)	REMARKS
			INSTALL (EA)	SALVAGE (EA)	RELOCATE (EA)			
1	BIKE LANE BEGIN	R81 (CA) R81A (CA)	1					1800' west from "F Line" 14+15.00 Rt.
2	BIKE LANE END	R81 (CA) R81B (CA)	1					1800' west from "F Line" 14+15.00 Lt.
3	STOP AHEAD	W3-1				F Line'-14+18.61 - 18.39.00' Rt		Existing sign to remain in place.
4	BIKE LANE	R81 (CA)	1				F Line'-15+21.00 - 21.00' Rt	
5	UNDERGROUND UTILITY SIGN				1	F Line'-16+15.98 - 33.00' Rt		This sign is relocated by utility company.
6	RIGHT LANE MUST TURN RIGHT	R3-7	1				F Line'-16+42.00 - 33.00' Rt	
7	BIKE LANE BEGIN	R81 (CA) R81A (CA)	1					F Line'-18+00.00 - 18.00' Lt
8	STOP ALL WAY	R1-1 R1-4	1	1		F Line'-18+20.63 - 30.16' Rt	F Line'-18+23.00- 20.00' Rt	
9	IN-STREET PEDESTRIAN CROSSING BIKE LANE END	R1-6 R81 (CA) R81B (CA)	1					F Line'-17+85.00 - 38.00' Rt "Yield To Pedestrian Within Crosswalk" sign. The minimum height of the bottom of the lowest sign must be placed approximately 7' above the ground.
10	BIKE SHARE THE ROAD	W11-1 W16-1	1					F Line'-19+15.00 - 25.00' Rt
11	SPEED LIMIT RADAR ENFORCED	R2-1 R48-1 (CA)	1	1		E Line'-15+36.32 - 35.48' Rt	E Line'-15+00.00 - 42.00' Rt	Speed Limit 50 mph.
12	RIGHT LANE TURN RIGHT AHEAD	W73A (CA)	1					E Line'-16+00.00 - 42.00' Rt
13	STREET NAME	D3-1	1	1		E Line'-17+86.33 - 23.13' Rt	E Line'-17+75.00 - 42.00' Rt	"Brittany Place".
14	BEGIN RIGHT TURN LANE YIELD TO BIKE	R4-4	1					F Line'-15+75.00 - 26.00' Rt
TOTAL			12	3	1			

REMOVE TRAFFIC STRIPE		
BEGIN STATION	END STATION	LENGTH (FT)
F Line' - 15+00.00	F Line' - 19+10.00	1,032.00
E Line' - 12+90.00	E Line' - 22+75.00	3,294
TOTAL		4,326.00

REMOVE PAVEMENT MARKERS		
BEGIN STATION	END STATION	EA
F Line' - 15+00.00	F Line' - 19+10.00	22.00
E Line' - 12+90.00	E Line' - 22+75.00	67
TOTAL		89.00

REMOVE PAVEMENT MARKINGS		
BEGIN STATION	END STATION	SF
F Line' - 15+00.00	F Line' - 19+10.00	44.00
E Line' - 12+90.00	E Line' - 22+75.00	50
TOTAL		94.00




THERMOPLASTIC TRAFFIC STRIPE

DETAIL No. / STANDARD PLAN	BEGIN STATION	END STATION	THERMOPLASTIC STRAFFIC STRIPE				PAVEMENT MARKER (RETROREFLECT)	
			WHITE (LF)			YELLOW (LF)	TYPE D	TYPE G
			4"	6"	8"	4"	(EA)	(EA)
22 - A20A	F Line' 14+45.00	F Line' 18+25.00 - Rt				760	36	
	F Line' 18+99.58 - Lt	F Line' 19+10.00 - Rt				22	4	
	E Line' 12+90.00 - Rt	E Line' 13+06.72-Rt				34	4	
	E Line' 13+80.00	E Line' 20+00.00				1240	52	
	E Line' 21+50.00	E Line' 22+60.00				220	10	
27B - A20B	E Line' 12+90.00 - Rt	E Line' 13+06.84 - Rt	17					
	E Line' 14+00.00 - Lt	E Line' 22+60.00 - Lt	860					
	E Line' 14+25.00 - Rt	E Line' 22+60.00 - Rt	845					
29 - A20B	E Line' 20+00.00	E Line' 21+50.00				616	14	
	E Line' 20+00.00 - Rt	E Line' 21+50.00 - Rt				600	14	
37B - RSP A20C	E Line' 15+25.00 - Rt	E Line' 17+25.00 - Rt		200				8
38 - A20D	F Line' 16+40.00 - Rt	F Line' 18+25.00 - Rt			185			10
	F Line' 17+91.31 - Rt	F Line' 18+25.00 - Rt			39			4
	F Line' 18+29.17 - Rt	F Line' 18+33.95 - Rt			25			3
	E Line' 12+90.00 - Rt	E Line' 13+06.77 - Rt			16			3
	E Line' 13+80.00	E Line' 19+75.00			595			27
	E Line' 13+80.00 - Rt	E Line' 15+25.00 - Rt			145			8
	E Line' 20+15.00 - Rt	E Line' 22+60.00 - Rt			245			12
E Line' 21+75.00	E Line' 23+00.00			127			6	
39A - A20D	F Line' 18+07.04 - Rt	E Line' 21+78.80		713				
39 - A20D	F Line' 14+45.00 - Lt	F Line' 18+25.00 - Lt		380				
	F Line' 14+45.00 - Rt	F Line' 15+25.00 - Rt		80				
	F Line' 16+40.00 - Rt	F Line' 18+25.00 - Rt		185				
	F Line' 17+28.00 - Rt	F Line' 17+67.25 - Rt		46				
	F Line' 17+94.07 - Rt	F Line' 18+07.04 - Rt		55				
TOTAL			1722	1659	1377	3492	134	81

PAVEMENT MARKINGS

SYMBOL DESCRIPTION - STANDARD PLAN	QUANTITY (EA)	AREA (SF)	TOTAL AREA (SF)
TYPE II (L) ARROW - A24B	1	45	45
TYPE II (R) ARROW - A24B	1	45	45
TYPE III (L) ARROW - A24B	1	42	42
TYPE III (R) ARROW - A24B	4	42	168
TYPE VI ARROW - RSP A24A	5	42	210
BIKE LANE ARROW - RSP A24A	3	7	21
BIKE LANE SYMBOL WITH PERSON - RSP A24C	5	7	35
STOP - A24D	6	22	132
YIELD - A24D	1	24	24
CROSSWALK & LIMIT LINE (YELLOW) - RSP A24E		499	499
CROSSWALK DIAGONAL LINE (YELLOW) - RSP A24E		395	395
TOTAL			1616

REVISED SHEET
 QUANTITY FOR PAVEMENT DELINEATION & SIGNS
 SCALE : N/A

REVISION 10/8/14 REPLACE THIS SHEET AB		PREPARED UNDER THE SUPERVISION OF:  REGISTERED CIVIL ENGINEER 09/09/14 DATE:	DESIGNED: AN DRAWN: AN CHECKED: AB DATE: 08/21/2014 ROAD NUMBER: 5	 <p style="text-align: center;"> COUNTY OF EL DORADO COMMUNITY DEVELOPMENT AGENCY TRANSPORTATION DIVISION </p>	<p style="text-align: center;"> FRANCISCO DRIVE RIGHT-TURN POCKET </p>	SHEET SPD-3r 18 of 19 W.D. No. 71358
--	--	---	--	--	---	---