


APPROVED
EL DORADO COUNTY
PLANNING COMMISSION
Board of Supervisors
DATE September 11, 2018
 BY *Roger [Signature]*



at&t

SITE NUMBER: CVL03054
SITE NAME: GOLD HILL
 6812 GODS WAY
 LOTUS, CA 95651

PROPRIETARY INFORMATION
 THE INFORMATION CONTAINED IN THIS SET OF DRAWINGS IS PROPRIETARY BY NATURE. ANY USE OR DISCLOSURE OTHER THAN THAT WHICH RELATES TO PEAK SITE-CDM IS STRICTLY PROHIBITED

CLIENT:

2600 CAMINO RAMON
 SAN RAMON, CA 94583

PROJECT INFORMATION	PROJECT TEAM	SHEET INDEX
<p>APPLICANT: AT&T MOBILITY 2600 CAMINO RAMON SAN RAMON, CA 94583</p> <p>CONSTRUCTION MANAGER: PETE BARNES EPIC WIRELESS 8700 AUBURN FOLSON ROAD, SUITE 400 GRANITE BAY, CA 95744 (530) 383-5957</p> <p>SITE SURVEY: GEL ENGINEERING 1228 HIGH STREET AUBURN, CA 95603 (530) 885-0426</p> <p>SE ENGINEER: MUHAMMAD AHMED MASHPOMATT.COM</p> <p>SEDS, VERSION/DATL: 1.00.01 / 04-28-17</p>	<p>ENGINEERING FIRM: PEAK SITE-CDM 12852 EARHART AVE SUITE 101 AUBURN, CA 95602 (530) 885-6160</p> <p>SITE ACQUISITION & PLANNING: JARED KEARSELEY EPIC WIRELESS 8700 AUBURN FOLSON ROAD, SUITE 400 GRANITE BAY, CA 95744 (916) 755-1328</p> <p>CIVIL VENDOR: WINDOLINS CONSTRUCTION MANAGER KEVIN ABEL KABEL@WINDOLINS.COM (916) 844-6002</p> <p>SITE NAME: GOLD HILL SITE NUMBER: CVL03054 FA LOCATION: 13187871 SITE ADDRESS: 6812 GODS WAY LOTUS, CA 95651</p> <p>ASSESSOR'S PARCEL NUMBER: 105-110-81-100 38 802401 -120 837256 1197 AREA</p> <p>ZONING: R-10 JURISDICTION: EL DORADO COUNTY COUNTY:</p> <p>PROPERTY OWNER: ANNE I. STROUD TR. RONDER STROUD AND KATHLEEN STROUD 6812 GODS WAY LOTUS, CA 95651</p> <p>POWER AGENCY:</p> <p>TELEPHONE AGENCY:</p>	<p>T-1 GN-1 GN-2 C-1 C-2 C-3 C-4 A-1 A-2 A-3 A-3.1 A-4 A-4.1</p> <p>TITLE SHEET GENERAL NOTES SITE SIGNAGE SITE SURVEY EROSION CONTROL PLAN & DETAILS GRADING NOTES & DETAILS GRADING PLAN OVERALL SITE PLAN EQUIPMENT PLAN ANTENNA PLAN & DETAILS DETAILS ELEVATIONS ELEVATIONS</p>

PROJECT INFORMATION:

GOLD HILL
 6812 GODS WAY
 LOTUS, CA 95651

REV.	DATE:	DESCRIPTION:	BY:
1	6-5-17	90% ZONING DOCUMENTS	AMP
1	8-3-17	95% ZONING DOCUMENTS	ALP
2	8-9-17	100% ZONING DOCUMENTS	ALP

CODE COMPLIANCE	VICINITY MAP	DIRECTIONS FROM AT&T	PROJECT DESCRIPTION
<p>ALL WORK AND MATERIALS SHALL BE PERFORMED AND INSTALLED IN ACCORDANCE WITH THE CURRENT EDITIONS OF THE FOLLOWING CODES AS ADOPTED BY THE LOCAL GOVERNING AUTHORITIES. NOTHING IN THESE PLANS IS TO BE CONSIDERED TO PERMIT WORK NOT CONFORMING TO THESE CODES</p> <ol style="list-style-type: none"> 2016 CALIFORNIA BUILDING CODE 2016 CALIFORNIA FIRE CODE 2016 CALIFORNIA ELECTRICAL CODE 2016 CALIFORNIA PLUMBING CODE 2016 CALIFORNIA MECHANICAL CODE 2016 CALIFORNIA HEALTH AND SAFETY CODE 	<p>SITE LOCATION</p>	<p>DIRECTIONS FROM AT&T'S OFFICE AT 2600 CAMINO ROMAN SAN RAMON, CA 94583</p> <p>Summary: 128.4 miles (2 hours, 2 minutes)</p> <p>Depart San Ramon on I-680 N Take Ramp (RIGHT) onto I-80 E Road name changes to I-80 Branch TO US-50 Exit 37 Ponderosa Turn LEFT (North) onto Ponderosa Rd Turn RIGHT (East) onto N Shingle Rd Keep STRAIGHT onto Green Valley Rd Keep STRAIGHT onto Lotus Rd Turn LEFT (West) onto Boss Rd Bear RIGHT (North) onto Peterson Ln Turn LEFT (West) onto Clark Mountain Rd Turn LEFT (South) onto Gods Way</p> <p>Arrive 6812 Gods Way, Lotus, CA 95651</p>	<p>AT&T PROPOSES TO CONSTRUCT A NEW UNMANNED TELECOMMUNICATIONS FACILITY. AT&T WILL INSTALL:</p> <ul style="list-style-type: none"> (1) NEW 12' WIDE GRAVEL ACCESS ROAD (1) NEW 35'x40' FENCED LEASE AREA (1) NEW 6" CHAIN LINK FENCE (1) NEW 12' WIDE DOUBLE ACCESS GATE (1) NEW 112' MONOPHIE (1) NEW PRE-FAB LIGHT WEIGHT EQUIPMENT SHELTER (1) NEW GPS ANTENNA (1) NEW 35Kw PROPANE GENERATOR (1) LP PROPANE TANK (500 GALLON) (12) NEW ANTENNAS (9) NEW RRUS-11, (9) NEW RRUS-32 & (3) FUTURE RRUS (4) NEW SURGE SUPPRESSORS (2) FUTURE 4' M/W DISH

COORDINATING ENGINEER:

Peek Site-Com
 12852 Earhart Ave, Suite 101
 Auburn, California 95602
 Phone (530) 885-6160
 E-Mail info@peeksitcom.com

OCCUPANCY & CONST. TYPE	SPECIAL INSPECTIONS	APPROVALS	GENERAL CONTRACTOR NOTES
<p>OCCUPANCY: U (UNMANNED) CONSTRUCTION TYPE: V-B</p>	<p>*SEE SPECIAL INSPECTION FORM</p> <ol style="list-style-type: none"> POST-INSTALLED ANCHORS HIGH STRENGTH BOLTING <p>Exhibit F Site 7 Gold Hill</p>	<p>APPROVED BY: _____ INITIALS: _____ DATE: _____</p> <p>AT&T: _____</p> <p>VENDOR: _____</p> <p>R.F.: _____</p> <p>LEASING/LANDLORD: _____</p> <p>ZONING: _____</p> <p>CONSTRUCTION: _____</p> <p>POWER/TELCO: _____</p> <p>PG&E: _____</p>	<p>GENERAL CONTRACTOR NOTES</p> <p>DO NOT SCALE DRAWINGS</p> <p>THESE DRAWINGS ARE FORMATTED TO BE FULL SIZE 24"x36". CONTRACTOR SHALL VERIFY ALL PLANS AND EXISTING DIMENSIONS AND CONDITIONS ON THE JOBSITE AND SHALL IMMEDIATELY NOTIFY THE ARCHITECT/ENGINEER IN WRITING OF ANY DISCREPANCIES BEFORE PROCEEDING WITH THE WORK OR MATERIAL ORDERS OR BE RESPONSIBLE FOR THE SAME.</p>

SEAL:

SITE # _____ DRAWN BY: _____
 CVL03054 ... AMP

SHEET TITLE:

TITLE SHEET

SHEET NUMBER: **T-1** REVISION: **0**

GENERAL CONSTRUCTION NOTES:

- DRAWINGS ARE NOT TO BE SCALED. WRITTEN DIMENSIONS TAKE PRECEDENCE, AND THIS SET OF PLANS IS INTENDED TO BE USED FOR DIAGRAMMATIC PURPOSES ONLY, UNLESS NOTED OTHERWISE. THE GENERAL CONTRACTOR'S SCOPE OF WORK SHALL INCLUDE FURNISHING ALL MATERIALS, EQUIPMENT, LABOR, AND ANYTHING ELSE DEEMED NECESSARY TO COMPLETE INSTALLATIONS AS DESCRIBED HEREIN.
- PRIOR TO THE SUBMISSION OF BIDS, THE CONTRACTORS INVOLVED SHALL VISIT THE JOB SITE AND FAMILIARIZE THEMSELVES WITH ALL CONDITIONS AFFECTING THE PROPOSED PROJECT, WITH THE CONSTRUCTION AND CONTRACT DOCUMENTS, FIELD CONDITIONS AND CONFIRM THAT THE PROJECT MAY BE ACCOMPLISHED AS SHOWN PRIOR TO PROCEEDING WITH CONSTRUCTION. ANY ERRORS, OMISSIONS, OR DISCREPANCIES ARE TO BE BROUGHT TO THE ATTENTION OF THE ARCHITECT/ENGINEER.
- THE GENERAL CONTRACTOR SHALL RECEIVE WRITTEN AUTHORIZATION TO PROCEED WITH CONSTRUCTION PRIOR TO STARTING WORK ON ANY ITEM NOT CLEARLY DEFINED BY THE CONSTRUCTION DRAWINGS/ CONTRACT DOCUMENTS.
- THE CONTRACTOR SHALL SUPERVISE AND DIRECT THE PROJECT DESCRIBED HEREIN. THE CONTRACTOR SHALL BE SOLELY RESPONSIBLE FOR ALL CONSTRUCTION MEANS, METHODS, TECHNIQUES, SEQUENCES AND PROCEDURES AND FOR COORDINATING ALL PORTIONS OF THE WORK UNDER THE CONTRACT.
- THE CONTRACTOR SHALL INSTALL ALL EQUIPMENT AND MATERIALS ACCORDING TO MANUFACTURER'S/ VENDOR'S SPECIFICATIONS UNLESS NOTED OTHERWISE OR WHERE LOCAL CODES OR ORDINANCES TAKE PRECEDENCE.
- ALL WORK PERFORMED ON PROJECT AND MATERIALS INSTALLED SHALL BE IN STRICT ACCORDANCE WITH ALL APPLICABLE CODES, REGULATIONS AND ORDINANCES. CONTRACTOR SHALL GIVE ALL NOTICES AND COMPLY WITH ALL LAWS, ORDINANCES, RULES, REGULATIONS AND LAWFUL ORDERS OF ANY PUBLIC AUTHORITY, MUNICIPAL AND UTILITY COMPANY SPECIFICATIONS, AND LOCAL AND STATE JURISDICTIONAL CODES BEARING ON THE PERFORMANCE OF THE WORK.
- GENERAL CONTRACTOR SHALL PROVIDE AT THE PROJECT SITE A FULL SET OF CONSTRUCTION DOCUMENTS UPDATED WITH THE LATEST REVISIONS AND ADDENDUMS OR CLARIFICATIONS FOR THE USE BY ALL PERSONNEL INVOLVED WITH THE PROJECT.
- THE STRUCTURAL COMPONENTS OF THIS PROJECT SITE/ FACILITY ARE NOT TO BE ALTERED BY THIS CONSTRUCTION PROJECT UNLESS NOTED OTHERWISE.
- DETAILS INCLUDED HEREIN ARE INTENDED TO SHOW END RESULT OF DESIGN. MINOR MODIFICATIONS MAY BE REQUIRED TO SUIT JOB CONDITIONS OR SITUATIONS, AND SUCH MODIFICATIONS SHALL BE INCLUDED AS PART OF THE SCOPE OF WORK.
- SEAL PENETRATIONS THROUGH FIRE-RATED AREAS WITH U.L. LISTED OR FIRE MARSHAL APPROVED MATERIALS IF APPLICABLE TO THIS FACILITY AND OR PROJECT SITE.
- PROVIDE A PORTABLE FIRE EXTINGUISHER WITH A RATING OF NOT LESS THAN 2-A OR 2-A10BC WITHIN 75 FEET TRAVEL DISTANCE TO ALL PORTIONS OF THE PROJECT AREA DURING CONSTRUCTION.
- THE CONTRACTOR SHALL MAKE NECESSARY PROVISIONS TO PROTECT EXISTING IMPROVEMENTS, EASEMENTS, PAVING, CURBING, ETC. DURING CONSTRUCTION. UPON COMPLETION OF WORK, CONTRACTOR SHALL REPAIR ANY DAMAGE THAT MAY HAVE OCCURRED DUE TO CONSTRUCTION ON OR ABOUT THE PROPERTY.
- CONTRACTOR SHALL SEE TO IT THAT GENERAL WORK AREA IS KEPT CLEAN AND HAZARD FREE DURING CONSTRUCTION AND DISPOSE OF ALL DIRT, DEBRIS, RUBBISH AND REMOVE EQUIPMENT NOT SPECIFIED AS REMAINING ON THE PROPERTY. PREMISES SHALL BE LEFT IN CLEAN CONDITION AND FREE FROM PAINT SPOTS, DUST, OR SMUDGES OF ANY NATURE.
- THE ARCHITECTS/ENGINEERS HAVE MADE EVERY EFFORT TO SET FORTH IN THE CONSTRUCTION AND CONTRACT DOCUMENTS THE COMPLETE SCOPE OF WORK. CONTRACTORS BIDDING THE JOB ARE NEVERTHELESS CAUTIONED THAT MINOR OMISSIONS OR ERRORS IN THE DRAWINGS AND OR SPECIFICATIONS SHALL NOT EXCUSE SAID CONTRACTOR FROM COMPLETING THE PROJECT AND IMPROVEMENTS IN ACCORDANCE WITH THE INTENT OF THESE DOCUMENTS. THE BIDDER SHALL BEAR THE RESPONSIBILITY OF NOTIFYING (IN WRITING) THE ARCHITECT/ENGINEER OF ANY CONFLICTS, ERRORS, OR OMISSIONS PRIOR TO THE SUBMISSION OF CONTRACTOR'S PROPOSAL. IN THE EVENT OF DISCREPANCIES THE CONTRACTOR SHALL PRICE THE MORE COSTLY OR EXTENSIVE WORK, UNLESS DIRECTED OTHERWISE.

ABBREVIATIONS

ABV.	ABOVE	L.F.	LINEAR FEET (FOOT)
ADD'L	ADDITIONAL	MAX.	MAXIMUM
A.G.L.	ABOVE GROUND LEVEL	M.B.	MACHINE BOLT
ALUM.	ALUMINUM	MECH.	MECHANICAL
APPROX.	APPROXIMATELY	MFR.	MANUFACTURER
AWG.	AMERICAN WIRE GAUGE	MN.	MINIMUM
BLDG.	BUILDING	MISC.	MISCELLANEOUS
BLK.	BLOCKING	MTL.	METAL
CAB.	CABINET	(N)	NEW
CONC.	CONCRETE	NO. (#)	NUMBER
CONN.	CONNECTION(OR)	N.T.S.	NOT TO SCALE
CONST.	CONSTRUCTION	O.C.	ON CENTER
CONT.	CONTINUOUS	P/C	PRECAST CONCRETE
DBL.	DOUBLE	PPC	POWER PROTECTION CABINET
DEPT.	DEPARTMENT	P.S.F.	POUNDS PER SQUARE FOOT
D.F.	DOUGLAS FIR	P.S.I.	POUNDS PER SQUARE INCH
DIA.	DIAMETER	P.T.	PRESSURE TREATED
DN.	DIMENSION	QTY.	QUANTITY
EA.	EACH	RAD. (R)	RADIUS
EL.	ELEVATION	REF.	REFERENCE
ELEC.	ELECTRICAL	REINF.	REINFORCEMENT(ING)
EMT.	ELECTRICAL METALLIC TUBING	REQ'D	REQUIRED
ENG.	ENGINEER	RES	RIGID GALVANIZED STEEL
EQ.	EQUAL	SCH.	SCHEDULE
(E)	EXISTING	SH.	SHEET
EXT.	EXTERIOR	SPEC.	SPECIFICATIONS
FAB.	FABRICATION	SQ.	SQUARE
F.A.	FURNISHED FLOOR	S.S.	STAINLESS STEEL
F.B.	FURNISHED GRADE	STD.	STANDARD
FT. (')	FOOT (FEET)	STL.	STEEL
FTC.	FOOTING	STRUC.	STRUCTURAL
GA.	GAUGE	TEMP.	TEMPORARY
GALV.	GALVANIZED(O)	T.O.A.	TOP OF ANTENNAS
G.F.I.	GROUND FAULT CIRCUIT INTERRUPTER	T.O.F.	TOP OF FOUNDATION
G.P.S.	GLOBAL POSITIONING SYSTEM	T.O.P.	TOP OF PLATE (PARAPET)
GRND.	GROUND(ING)	T.O.W.	TOP OF WALL
HT.	HEIGHT	TR.	TYPICAL
ICCB.	ISOLATED COPPER GROUND BUS	U/G	UNDER GROUND
IN. (")	INCHES	V.I.F.	VERIFY IN FIELD
INT.	INTERIOR	W	WIDE (WIDTH)
L.B.	LAG BOLTS	W/	WITH
		WT.	WEIGHT

SYMBOLS LEGEND

	WOOD FENCE
	CHAIN LINK FENCE
	HIDDEN LINE
	COAX/POWER/FIBER CONDUIT
	PROPERTY LINE
	ELEVATION DATUM
	EARTH
	CONCRETE
	SAND
	GRATE PLATFORM
	GRAVEL
	FRP (FIBERGLASS REINFORCED PLASTIC)
	NEW DC SURGE SUPPRESSOR
	NEW ANTENNA
	NEW RRU

PROPRIETARY INFORMATION
THE INFORMATION CONTAINED IN THIS SET OF DRAWINGS IS PROPRIETARY BY NATURE. ANY USE OR DISCLOSURE OTHER THAN THAT WHICH RELATES TO PEAK SITE-CDM IS STRICTLY PROHIBITED

CLIENT:



2600 CAMINO RAMON
SAN RAMON, CA 94583

PROJECT INFORMATION:

GOLD HILL

4812 GORE WAY
LOTUS, CA 95651

REV. DATE DESCRIPTION BY

1	6-5-17	80K ZONING DOCUMENTS	AMP
1	8-3-17	85K ZONING DOCUMENTS	ALP
2	8-9-17	100K ZONING DOCUMENTS	ALP

COORDINATING ENGINEER:

Peek Site-Com

12852 Earhart Ave. Suite 101
Auburn, California 95602
Phone (530) 885-6180

E-Mail info@peeksitecom.com

SEAL:



SITE # CVL03054 CHK. ... DRAWN BY: AMP

SHEET TITLE:

GENERAL NOTES

SHEET NUMBER: REVISION:

GN-1 0

GENERAL NOTES

- THE CONTRACTOR SHALL HAVE A RESPONSIBLE PARTY, WHO SHALL HAVE THE AUTHORITY TO REPRESENT AND ACT FOR THE CONTRACTOR, ON THE JOB SITE DURING ALL WORKING HOURS.
- ALL WORK SHALL BE ACCOMPLISHED TO THE SATISFACTION OF THE WASHOE COUNTY AUTHORIZED REPRESENTATIVE.

DEFINITIONS:

- (ESC) - EROSION AND SEDIMENT CONTROL
- (NPS) - NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM
- (CWA) - CLEAN WATER ACT
- (SWP) - STORM WATER POLLUTION PREVENTION PLAN
- (BMP'S) - BEST MANAGEMENT PRACTICES

THE CONTRACTOR SHALL:

MAKE HIMSELF AWARE OF THE REQUIREMENTS OF 540 GENERAL PERMIT AND THE PROVISIONS OF THE GRADING & EROSION CONTROL PLANS.

IMPLEMENT THE ESC FEATURES AND BEST MANAGEMENT PRACTICES (BMP'S) CONTAINED IN THE IMPROVEMENT PLANS, AND OTHERWISE DILIGENTLY PURSUE COMPLIANCE WITH THE LOCAL REQUIREMENTS.

ASSIST THE OWNER, ENGINEER, AND PUBLIC WORKS DEPARTMENT STAFF IN THE ASSESSMENT OF THE FUNCTIONALITY OF AND MODIFICATIONS TO THE FEATURES AND PRACTICES IMPLEMENTED AND PROPOSED.

MEET WITH THE OWNER AND THE PUBLIC WORKS DEPARTMENT STAFF TO DETERMINE AND CROSS-CHECK THE STATUS OF THE PROJECT, CONSTRUCTION SCHEDULE, AND ANY MODIFICATIONS TO THE IMPROVEMENT PLANS, AND OTHERWISE DILIGENTLY PURSUE COMPLIANCE WITH THE LOCAL REQUIREMENTS.

DOCUMENT ANY MAINTENANCE, REPLACEMENT, INSPECTION, MODIFICATIONS OR ADDITIONS TO THE PROJECT ESC FEATURES, AND NOTIFY THE ENGINEER, OWNER AND PUBLIC WORKS DEPARTMENT STAFF OF ANY SUBSTANTIAL MODIFICATIONS OR ADDITIONS TO THE ESC PRACTICES AND FEATURES. ALL DISTURBED AREAS SHALL BE PROTECTED WITH APPROVED MATERIALS WITHIN 15 DAYS OF COMPLETION OF THE FINISHED GRADES.

MAINTAIN AN INVENTORY OF ESC MATERIALS (STRAW BALE, 1.5" - 3" CLEAN ORCHARD ROOF, FIBER ROLL, SILT FENCE, ROCK BAGS, ETC.) ON SITE FOR EMERGENCY USE AS DIRECTED BY THE ENGINEER, OWNER, OR THE PUBLIC WORKS DEPARTMENT STAFF.

OTHER RESPONSIBILITIES OF APPLICANT:

- PROTECTION OF UTILITIES: THE APPLICANT SHALL BE RESPONSIBLE FOR THE PREVENTION OF DAMAGE TO ANY PUBLIC UTILITIES OR SERVICES.
- PROTECTION OF ADJACENT PROPERTY: THE APPLICANT SHALL BE RESPONSIBLE FOR THE PREVENTION OF DAMAGE TO ADJACENT PROPERTY. NO PERSONS/NO PERSONS SHALL EAVESDROP OR INTERFERE WITH THE PROPERTY LINE AS TO ENJOINER ANY ADJACENT PUBLIC STREET, SIDEWALK, ALLEY, STRUCTURE OR OTHER PUBLIC OR PRIVATE PROPERTY OR EASEMENT WITHOUT SUPPORTING AND PROTECTING SUCH PROPERTY FROM ANY DAMAGE WHICH MIGHT OTHERWISE RESULT.
- ADVANCE NOTICE: THE APPLICANT SHALL NOTIFY THE COUNTY AT LEAST FORTY-DIGHT HOURS PRIOR TO THE START OF WORK.
- EROSION AND SEDIMENT CONTROL: IT SHALL BE THE SOLE RESPONSIBILITY OF THE APPLICANT TO PREVENT DISCHARGE OF SEDIMENT FROM THE SITE, IN QUANTITIES GREATER THAN BEFORE THE GRADING OCCURRED, TO ANY WATERCOURSE, DRAINAGE SYSTEM, OR ADJACENT PROPERTY.
- COMPLIANCE WITH STORMWATER RUNOFF POLLUTION CONTROL CODE: AT ALL TIMES DURING THE PRE-CONSTRUCTION AND CONSTRUCTION OF ANY PROJECT FOR WHICH GRADING APPROVAL IS ISSUED UNTIL ALL FINAL IMPROVEMENTS AND PERMANENT STRUCTURES ARE COMPLETE, THE APPLICANT SHALL FULLY COMPLY WITH ALL APPLICABLE REQUIREMENTS OF THE STORMWATER RUNOFF POLLUTION CONTROL CODE.

EROSION CONTROL NOTES

- ALL EROSION AND SEDIMENT CONTROL MEASURES SHALL BE CONSTRUCTED AND MAINTAINED IN ACCORDANCE WITH THE COUNTY IMPROVEMENT STANDARDS, CURRENT EDITION, AND THE COUNTY EROSION AND SEDIMENT CONTROL GUIDELINES.
- EROSION CONTROL BEST MANAGEMENT PRACTICES (BMP'S) SHALL BE INSTALLED AND MAINTAINED DURING THE NET SEASON (OCTOBER THROUGH APRIL 30). SEDIMENT CONTROL BMP'S SHALL BE INSTALLED AND MAINTAINED ALL YEAR.
- ALL DRAINAGE INLETS IMMEDIATELY DOWNSTREAM OF THE WORK AREAS AND WITHIN THE WORK AREAS SHALL BE PROTECTED WITH SEDIMENT CONTROL AND INLET FILTER BAGS. YEAR ROUND INLET FILTER BAGS SHALL BE REMOVED FROM THE DRAINAGE INLETS UPON ACCEPTANCE OF THE PUBLIC IMPROVEMENTS BY THE COUNTY.
- ALL AREAS DISTURBED DURING CONSTRUCTION, BY GRADING, TRENCHING, OR OTHER ACTIVITIES, SHALL BE PROTECTED FROM EROSION DURING THE NET SEASON (OCTOBER 1 THROUGH APRIL 30). HYDROSEEDING, IF UTILIZED, MUST BE PLACED BY SEPTEMBER 15. HYDROSEEDING PLACED DURING THE NET SEASON SHALL USE A SECONDARY EROSION PROTECTION METHOD.
- SENSITIVE AREAS AND AREAS WHERE EXISTING VEGETATION IS BEING PRESERVED SHALL BE PROTECTED WITH CONSTRUCTION FENCING. SEDIMENT CONTROL, BMP'S SHALL BE INSTALLED WHERE ACTIVE CONSTRUCTION AREAS DRAIN INTO SENSITIVE OR PRESERVED VEGETATION AREAS.
- SEEDING CONTROL BMP'S SHALL BE PLACED ALONG THE PROJECT PERIMETER WHERE DRAINAGE LEAVES THE PROJECT. SEDIMENT CONTROL BMP'S SHALL BE MAINTAINED YEAR ROUND UNTIL THE CONSTRUCTION IS COMPLETE OR THE DRAINAGE PATTERN HAS BEEN CHANGED AND NO LONGER LEAVES THE SITE.
- THE FOLLOWING AREAS ARE TO RECEIVE HYDROSEEDING OR OTHER EROSION CONTROL: ALL SLOPES GREATER THAN 10:1.
- FOR DEMANDING OPERATIONS, SEDIMENT- LADEN STORM WATER SHALL BE EITHER PUMPED (NOTE 10) OR ROUTED (TEMPORARY OVERFLOW SNALES) TO SEDIMENT TRAPS) TO ALLOW SEDIMENT TO SETTLE OUT BEFORE DISCHARGE OFF-SITE. ONCE SEDIMENT HAS SETTLED OUT, WATER WILL BE DISCHARGED THROUGH SMALL LINED WITH IMPERVIOUS PLASTIC LINER.
- USE OF FIBER ROLLS SHALL BE AUGMENTED DURING NET SEASON WITH DRAINAGE BMP'S IN THE EVENT THAT FIBER ROLLS DO NOT EFFECTIVELY CONTROL STORM WATER ON SITE. DRAINAGE BMP'S WILL INCLUDE PUMPS OR BERMS TO ROUTE WATER TO THE SEDIMENT TRAP, IF PUMPS ARE USED, THEN FILTER BAGS SHALL BE USED AT DISCHARGE HOSE ENDS. DRAINAGE MATERIAL SHALL NOT BE DISCHARGED DIRECTLY TO THE STORM DRAIN SYSTEM.

REQUIRED BMP'S

THE FOLLOWING BMP'S SHALL BE REQUIRED ON ALL PROJECTS.

- ACCESS POINTS TO THE CONSTRUCTION SITE SHALL HAVE A STABILIZED CONSTRUCTION ACCESS.
- THE PRESERVATION OF EXISTING VEGETATION SHALL BE DONE IN ACCORDANCE WITH PRESERVATION OF EXISTING VEGETATION, AND SILT FENCE.
- PERIMETER PROTECTION ALONG PROPERTY LINES SHALL HAVE PRESERVATION OF EXISTING VEGETATION, OR SILT FENCE.
- SLOPES GREATER THAN 3 PERCENT SHALL BE TEMPORARILY SEEDED AND SLOPES GREATER 3:1 (H/V) SHALL HAVE HYDROSEEDING AND/OR GEOTEXTILES, PLASTER COVERS, AND/OR EROSION CONTROL BLANKETS INSTALLED.
- ROADWAY SUBGRADES SHALL HAVE FIBER ROLL, SILT FENCE, OR SEDIMENT TRAP.
- DEAD END STREETS, TO BE EXTENDED IN THE FUTURE, SHALL HAVE PRESERVATION OF EXISTING VEGETATION, HYDROSEEDING, SEDIMENT TRAP OR OTHER APPLICABLE BMP TO MINIMIZE THE TRANSPORT OF SEDIMENT ONTO OR FROM THE IMPROVED SURFACE.
- PROJECTS THAT INCLUDE DETENTION BASINS SHALL HAVE A SEDIMENT BASIN.
- PLACE DRAINAGE INLET SEDIMENT BMP'S AT ALL STORM DRAIN INLETS. BMP'S SHALL INCLUDE INLET SEDIMENT CONTROL, BARBER, INLET FILTER BAG AND CONCRETE STAMPS OR EXPLORED PLAGIADUMS.
- EACH CONSTRUCTION SITE SHALL PROVIDE DESIGNATED, PAINT AND WASTE DISPOSAL LOCATIONS AS NECESSARY.
- A BMP INSTALLATION SCHEDULE SHALL BE INCLUDED ON THE IMPROVEMENT PLANS. THE SCHEDULE SHALL INCLUDE THE BMP'S FOR BOTH THE NET SEASON AND THE DRY SEASON.

BMP INSTALLATION SCHEDULE

BEST MANAGEMENT PRACTICE	LOCATION	IMPLEMENTATION SCHEDULE	MAINTENANCE SCHEDULE
A. PRESERVE EXISTING VEGETATION	AROUND PERIMETER OF PROJECT SITE	CONTINUOUS. UNTIL CONSTRUCTION IS COMPLETED	EDUCATE EMPLOYEES AND SUBCONTRACTORS REGARDING IMPORTANCE OF MAINTAINING EXISTING VEGETATION TO PREVENT EROSION. PERMITS AND SIGNAGE IN BUSHES FROM DISTURBED AREAS ON THE CONSTRUCTION SITE. INSPECT WEEKLY TO VERIFY THE OUTSIDE VEGETATION IS NOT DISTURBED.
B. PROJECT GRADEN AREAS AND SLOPES FROM EROSION	THROUGHOUT PROJECT SITE	DURING NET SEASON	INSPECT GRADEN AREAS AND SLOPES ON AT LEAST A MONTHLY BASIS TO CHECK FOR EROSION. REMOVE TEMPORARY AREAS OR INSTALL FILTER BARRIERS OR SAND BAG DICES AS NECESSARY TO PREVENT EROSION.
C. CANAL FILTER	ALONG FLOW LINES OF UNPAVED ROADWAYS WITHIN SITE	IN PLACE DURING NET SEASON UNTIL ROADWAYS ARE PAVED	INSPECT DAILY AND AFTER EACH STORM. REMOVE OVERTE SEDIMENT DEPOSITED BEHIND BERM OR BARRIER TO MAINTAIN EFFECTIVENESS.
D. INLET FILTER BAG	WALLETS TO THE STORM DRAINAGE SYSTEM	CONTINUOUS. UNTIL LANDSCAPING IS IN PLACE	INSPECT WEEKLY AND AFTER EACH STORM. REMOVE SEDIMENT DEPOSITED BEHIND BERM OR BARRIER TO MAINTAIN EFFECTIVENESS.
E. FIBER ROLL	SEE PLAN SHEET	CONTINUOUS	INSPECT WEEKLY AND AFTER EACH STORM. REMOVE SEDIMENT DEPOSITED BEHIND FIBER ROLL WHENEVER NECESSARY TO MAINTAIN EFFECTIVENESS.
F. HYDROSEEDING	3:1 SLOPES	IN PLACE DURING BY SEPT. 10	INSPECT SLOPES ON AT LEAST A MONTHLY BASIS TO SPREAD STRAW MATH OVER APPLIED AREAS.
G. STABILIZED ENTRANCE	ENTRANCES TO SITE FROM PUBLIC ROADWAYS	CONTINUOUS. UNTIL ROADWAYS ARE COMPLETED	INSPECT ON A MONTHLY BASIS AND AFTER EACH STORM. REMOVE SEDIMENT FROM BEING NECESSARY TO PREVENT SEDIMENT FROM BEING BARRIERS TO PUBLIC STREETS.
H. WIND PROTECT FIBER ROLL	WHEREVER NECESSARY ALONG PROJECT SITE	CONTINUOUS. UNTIL CONSTRUCTION IS COMPLETED	INSPECT SITES DURING WHICH CONDITIONS TO CERTIFY AREAS WHERE WIND EROSION IS OCCURRING AND ADJUTE FIBER ROLL AS NECESSARY TO PREVENT EROSION.
I. GOOD HOUSEKEEPING	THROUGHOUT PROJECT SITE	CONTINUOUS. UNTIL CONSTRUCTION IS COMPLETED	INSPECT SITE ON AT LEAST A MONTHLY BASIS TO VERIFY THE GOOD HOUSEKEEPING PRACTICES ARE MAINTAINED.
J. PROPER CONSTRUCTION MATERIAL STORAGE	RESEARCHED AREA	CONTINUOUS. UNTIL CONSTRUCTION IS COMPLETED	INSPECT SITE ON AT LEAST A WEEKLY BASIS TO VERIFY THAT CONSTRUCTION MATERIALS ARE STORED IN A MANNER WHICH DOES NOT CAUSE STORM WATER POLLUTION.
K. PROPER CONSTRUCTION WASTE STORAGE AND DISPOSAL, INCLUDING SLOPE STABILIZATION	DESIGNATED COLLECTION AREA AND CONTAINERS	CONTINUOUS. UNTIL CONSTRUCTION IS COMPLETED	INSPECT SITE ON AT LEAST A WEEKLY BASIS TO VERIFY THAT WASTE IS STORED PROPERLY AND DISPOSED OF AT LEGAL DISPOSAL SITE, DAILY.
L. PROPER CONSTRUCTION MATERIAL STORAGE	NATURAL HARBORS INCLUDING SLOPE STABILIZATION	CONTINUOUS. UNTIL CONSTRUCTION IS COMPLETED	INSPECT MATERIAL HANDLING AREAS ON AT LEAST A MONTHLY BASIS TO VERIFY THAT SLOPE STABILIZATION IS MAINTAINED.
M. PROPER CONSTRUCTION MATERIAL STORAGE	DESIGNATED AREA WITH SECONDARY CONTAINMENT	CONTINUOUS	KEEP AMPLI SUPPLIES OF SPILL CLEANUP MATERIALS ON SITE & INSPECT ON REGULAR SCHEDULE.
N. STREET AND STORM DRAINAGE MAINTENANCE	STREETS AND STORM DRAINAGE	CONTINUOUS. UNTIL CONSTRUCTION IS COMPLETED	MAINTAIN STORM DRAINAGE FACILITIES AND PAVED STREETS CLEAR OF SEDIMENT AND DEBRIS.

- NET SEASON PERIOD EXTENDS BETWEEN OCTOBER 1 THROUGH APRIL 30. CONTRACTOR SHALL ALSO IMPLEMENT NET SEASON MEASURES IF NET WEATHER IS EXERCISED DURING THE DRY SEASON.
- PHASES OF WHICH GRADING AND GRADING ACTIVITIES OCCUR:
 - ROUGH (STAGE 1): WHEN CUT AND FILL ACTIVITIES OCCUR AND THE SITE IMPROVEMENTS ARE CONSTRUCTED, INCLUDING UNDERGROUND PIPING, STREETS, SIDEWALKS, AND OTHER IMPROVEMENTS.
 - FINAL (STAGE 2): WHEN FINAL ELEVATIONS ARE SET, AND SITE IMPROVEMENTS ARE COMPLETED AND READY FOR COUNTY ACCEPTANCE.

REVEGETATION STANDARDS

- PERMANENT REVEGETATION OR LANDSCAPING, IF REQUIRED, IS TO BE COMMENCED ON THE CONSTRUCTION SITE AS SOON AS PRACTICAL, AND IN NO CASE EXCEEDING TWENTY MONTHS AFTER ACHIEVING FINAL GRADES AND UTILITY PLACEMENTS. WHEREVER PRACTICAL, LAND IS TO BE DEVELOPED IN INCREMENTS OF WORKABLE SIZE WHICH CAN BE COMPLETED DURING A SINGLE CONSTRUCTION SEASON. EROSION CONTROL MEASURES ARE TO BE COORDINATED WITH THE SEQUENCE OF GRADING OR IMPROVEMENTS.
- ALL SURFACES DISTURBED BY VEGETATION REMOVAL, GRADING, HAUL ROADS, OR OTHER ACTIVITY OF CONSTRUCTION WHICH ALTERS THE NATURAL VEGETATIVE COVER ARE TO BE PREPARED FOR EXPEDITIOUS REVEGETATION OR OTHERWISE MAINTAINED TO CONTROL EROSION UNLESS COVERED WITH IMPERVIOUS OR OTHER IMPROVED SURFACES PURSUANT TO APPROVED PLANS WITHIN FOURTEEN DAYS FOLLOWING THE COMPLETION OF GRADING, OR REMOVAL OF VEGETATION IF NO GRADGAS WAS INVOLVED.
- TOPSOIL REMOVED FROM THE SURFACE IN PREPARATION FOR GRADING SHALL BE RESTORED TO EXPOSED CUT AND FILL EXHAUSTEDS OR BUILDING PADS SO AS TO PROVIDE A SUITABLE BASE FOR SEEDING AND PLANTING.
- ACCEPTABLE METHODS OF REVEGETATION INCLUDE STRAW-MULCHING, HYDRO-MULCHING OR PLANTING OF MIXTURE SPECIFIED IN THE IMPROVEMENT STANDARDS. OTHER METHODS OF REVEGETATION MAY BE APPROVED BY THE COUNTY ENGINEER WHERE EQUIVALENT PROTECTION IS PROVIDED.
- ALL REVEGETATION AND LANDSCAPING ARE TO BE CONDUCTED WITH SUSTAINABLE GROWING PERIODS. NATIVE PLANT MATERIALS ARE SPECIFICALLY ENCOURAGED IN ORDER TO REDUCE IRRIGATION DEMANDS.
- TEMPORARY SEDIMENTATION CONTROL FACILITIES ARE TO BE INSTALLED IN CONJUNCTION WITH NET SEASON OPERATIONS AND MAINTAINED THROUGHOUT THE CONSTRUCTION PERIOD TO REMOVE SEDIMENTS FROM RUNOFF WATERS DURING DEVELOPMENT.
- SEDIMENTATION CONTROL FACILITIES ARE TO BE INSTALLED IN CONJUNCTION WITH NET SEASON OPERATIONS AND MAINTAINED THROUGHOUT THE CONSTRUCTION PERIOD TO REMOVE SEDIMENTS FROM RUNOFF WATERS DURING DEVELOPMENT.
- THE PLANTING OR SEEDING OF VEGETATIVE PROTECTION MUST BE EFFECTIVE, IF THE VEGETATION DOES NOT GROW AND OTHER PROPER PROTECTION, IT MUST BE REPLANTED OR RESEED.
- THE MAINTENANCE OF VEGETATIVE PROTECTION ON GRADED SLOPES SHALL BE THE RESPONSIBILITY OF THE PERMITTEE AND SHALL BE GUARANTEED UNTIL THE VEGETATION IS WELL ESTABLISHED OR IS OFFICIALLY ASSUMED BY ANOTHER PARTY.

DUST MITIGATION PLAN

SECTION 1: FUGITIVE DUST PREVENTION AND CONTROL

LAND CLEARING/EARTH MOVING:
WATER SHALL BE APPLIED BY MEANS OF TRUCKS, HOSES AND/OR SPRINKLERS PRIOR TO ANY LAND CLEARING OR EARTH MOVEMENT TO MINIMIZE DUST EMISSIONS. MAINTAIN VEHICLES TRANSPORTING SOIL INTO OR OUT OF THE PROPERTY SHALL BE COVERED.


PAVED ROAD TRACK-OUT:
PAVED ROADS SHALL BE CLEANED IF THE AMOUNT OF DIRT TRACKED-OUT OF THE OPERATION AREA HAS THE POTENTIAL TO CAUSE FLUT EMISSIONS.

UNPAVED ROAD TRACK-OUT:
ALL VISIBLY DRY DISTURBED UNPAVED DRIVEWAY SURFACE AREAS OPERATING SHALL BE WATERED TO MINIMIZE DUST EMISSIONS. UNPAVED DRIVEWAYS MAY BE GRAVELLED TO REDUCE DUST EMISSIONS.

VEHICLES ENTERING / EXITING CONSTRUCTION AREA:
VEHICLES ENTERING OR EXITING CONSTRUCTION AREA SHALL TRAVEL AT A SPEED WHICH MINIMIZES DUST EMISSIONS.

EMPLOYEE VEHICLES:
CONSTRUCTION WORKERS PARK IN DESIGNATED PARKING AREAS) TO HELP REDUCE DUST EMISSIONS.

SOIL PILES:
SOIL PILE SURFACES SHALL BE MOISTENED IF DUST IS BEING DIRTED FROM THE PILES. ADEQUATELY COVERED OR STABILIZED SOIL PILES SHALL BE REQUIRED TO FURTHER REDUCE DUST EMISSIONS.

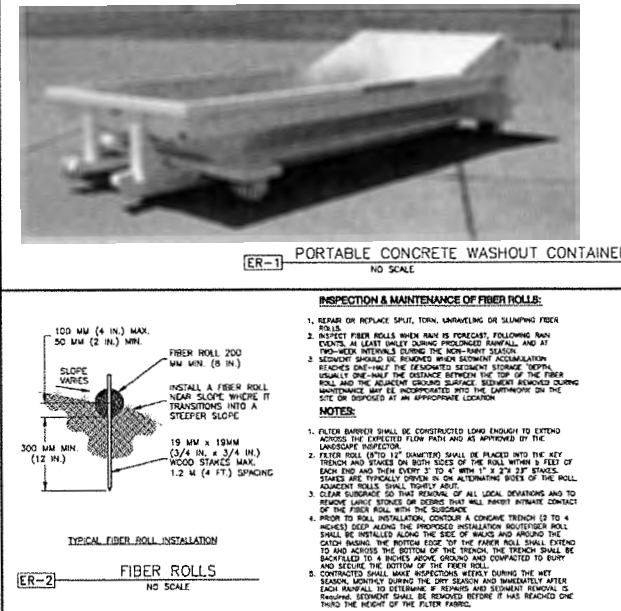


PROPRIETARY INFORMATION
THE INFORMATION CONTAINED IN THIS SET OF DRAWINGS IS PROPRIETARY BY NATURE. ANY USE OR DISCLOSURE OTHER THAN THAT WHICH RELATES TO PECK SITE-CDM IS STRICTLY PROHIBITED.



PROJECT INFORMATION:
GOLD HILL
6812 GODES WAY
L7045, CA 94561

REV. #	DATE	DESCRIPTION	BY
1	6-5-17	90X ZONING DOCUMENTS	AMP
1	8-3-17	90X ZONING DOCUMENTS	AMP
2	8-9-17	100X ZONING DOCUMENTS	AMP

COORDINATING ENGINEER:
Peek Site-Com
12852 Earhart Ave. Suite 101
Auburn, California 95602
Phone (530) 885-6160
E-Mail info@peeksitecom.com



SITE #:
CWL03054

CHK: _____
DRAWN BY: _____

SHEET TITLE:
EROSION CONTROL NOTES


SHEET NUMBER: _____
REVISION: _____

C-2 0

GRADING STANDARDS

1. GENERAL UNLESS OTHERWISE RECOMMENDED IN THE APPROVED SOILS ENGINEERING OR ENGINEERING GEOLOGY REPORT, GRADING ACTIVITIES SHALL CONFORM TO THE PROVISIONS OF THIS SECTION.
 - A. CUT SLOPE, THE SLOPE OF CUT SURFACES SHALL BE NO STEEPER THAN IS SAFE FOR THE INTENDED USE AND SHALL BE NO STEEPER THAN 1 UNIT VERTICAL IN 2 UNITS HORIZONTAL (50% SLOPE) UNLESS THE PERMITTEE FURNISHES A SOILS ENGINEERING OR AN ENGINEERING GEOLOGY REPORT, OR BOTH, STATING THAT THE SITE HAS BEEN INVESTIGATED AND GIVING AN OPINION THAT A CUT AT A STEEPER SLOPE WILL BE STABLE AND NOT CREATE A HAZARD TO PROPERTY OR THE ENVIRONMENT.
 - B. FILL SLOPE AND PREPARATION
 - (1) PREPARATION OF GROUND, THE GROUND SURFACE SHALL BE PREPARED TO RECEIVE FILL BY REMOVING VEGETATION, NON-COMPLYING FILL, TOPSOIL AND OTHER UNSUITABLE MATERIALS SCARIFYING TO PROVIDE A BOND WITH THE NEW FILL.
 - (2) FILL MATERIAL AMOUNT OF ORGANIC MATERIAL DETRIMENTAL TO STRUCTURAL INTEGRITY SHALL NOT BE PERMITTED IN FILLS EXCEPT AS PERMITTED BY THE BUILDING OFFICIAL, NO ROCK OR SIMILAR IRREDUCIBLE MATERIAL WITH A MAXIMUM DIMENSION GREATER THAN 12 INCHES (0.31 M) SHALL BE BURIED OR PLACED IN FILLS.
 - (3) EXCEPTION, THE BUILDING OFFICIAL MAY PERMIT PLACEMENT OF LARGER ROCK WHEN THE SOILS ENGINEER PROPERLY ADVISES A METHOD OF PLACEMENT, AND CONTINUOUSLY INSPECTS ITS PLACEMENT AND APPROVES THE FILL STABILITY. THE FOLLOWING CONDITIONS SHALL ALSO APPLY.
 - (a) PRIOR TO ISSUANCE OF THE GRADING PERMIT, POTENTIAL ROCK DISPOSAL AREAS SHALL BE SHOWN ON THE GRADING PLAN.
 - (b) ROCK SIZES GREATER THAN 12 INCHES (0.31 M) IN MAXIMUM DIMENSION SHALL BE 10 FEET (3.05 M) OR MORE BELOW GRADE, MEASURED VERTICALLY.
 - (c) ROCKS SHALL BE PLACED SO AS TO ASSURE FILLING OF ALL VOIDS WITH WELL-GRADED SOIL.
 - (4) COMPACTION, ALL FILLS SHALL BE COMPACTED TO A MINIMUM OF 90 PERCENT OF MAXIMUM DRY DENSITY WITH SUFFICIENT TESTING FOR DOCUMENTATION OF COMPLIANCE WITH THIS STANDARD.
 - (5) SLOPE, THE SLOPE OF FILL SURFACES SHALL BE NO STEEPER THAN IS SAFE FOR THE INTENDED USE. FILL SLOPES SHALL BE NO STEEPER THAN 1 UNIT VERTICAL IN 2 UNITS HORIZONTAL (50% SLOPE).
 - C. SETBACKS
 - (a) GENERAL, CUT AND FILL SLOPES SHALL BE SET BACK FROM SITE BOUNDARIES IN ACCORDANCE WITH THIS SECTION. SETBACK DIMENSIONS SHALL BE HORIZONTAL DISTANCES MEASURED PERPENDICULAR TO THE SITE BOUNDARY.
 - (b) TOP OF CUT SLOPE, THE TOP OF CUT SLOPES SHALL NOT BE MADE NEARER TO A SITE BOUNDARY LINE THAN A MINIMUM OF 2 FEET. THE SETBACK MAY NEED TO BE INCREASED FOR ANY REQUIRED INTERCEPTOR DRAINS.
 - (c) TOE OF FILL SLOPE, THE TOE OF FILL SLOPE SHALL BE MADE NOT NEARER TO THE SITE BOUNDARY LINE THAN MINIMUM OF 2 FEET. WHERE A FILL SLOPE IS TO BE LOCATED NEAR THE SITE BOUNDARY AND THE ADJACENT OFFSITE PROPERTY IS DEVELOPED, SPECIAL PRECAUTIONS SHALL BE INCORPORATED IN THE WORK AS THE BUILDING OFFICIAL DEEMS NECESSARY TO PROTECT THE ADJACENT PROPERTY FROM DAMAGE AS A RESULT OF SUCH GRADING. THESE PRECAUTIONS MAY INCLUDE BUT ARE NOT LIMITED TO:
 - (1) ADDITIONAL SETBACKS.
 - (2) PROVISION FOR RETAINING, OR SLOUGH WALLS.
 - (3) MECHANICAL OR CHEMICAL TREATMENT OF THE FILL SLOPE SURFACE TO MINIMIZE EROSION.
 - (4) PROVISIONS FOR THE CONTROL OF SURFACE WATERS.
 - (d) MODIFICATION OF SETBACKS, THE BUILDING OFFICIAL MAY APPROVE ALTERNATE SETBACKS, THE BUILDING OFFICIAL MAY REQUIRE AN INVESTIGATION AND RECOMMENDATION BY A QUALIFIED ENGINEER OR ENGINEERING GEOLOGIST TO DEMONSTRATE THAT THE INTENT OF THIS SECTION HAS BEEN SATISFIED.
2. MAINTENANCE REQUIRED, THE PROPERTY OWNER SHALL BE RESPONSIBLE FOR ADEQUATELY MAINTAINING ALL DRAINAGE FACILITIES INSTALLED PURSUANT TO THIS SECTION.
3. GRADING INSPECTION
 - A. GENERAL, GRADING OPERATIONS FOR WHICH A PERMIT IS REQUIRED SHALL BE SUBJECT TO INSPECTION BY THE BUILDING OFFICIAL.
 - B. PERMITTEE, THE PERMITTEE SHALL BE RESPONSIBLE FOR THE WORK TO BE PERFORMED IN ACCORDANCE WITH THE APPROVED PLANS AND SPECIFICATIONS AND IN CONFORMANCE WITH THE PROVISIONS OF THIS CODE, AND THE PERMITTEE SHALL ENGAGE CONSULTANTS, IF REQUIRED, TO PROVIDE PROFESSIONAL INSPECTIONS ON A TIMELY BASIS. THE PERMITTEE SHALL ACT AS A COORDINATOR BETWEEN THE CONSULTANTS, THE CONTRACTOR AND THE BUILDING OFFICIAL. IN THE EVENT OF CHANGED CONDITIONS, THE PERMITTEE SHALL BE RESPONSIBLE FOR INFORMING THE BUILDING OFFICIAL OF SUCH CHANGE AND SHALL PROVIDE REVISED PLANS FOR APPROVAL.
 - C. BUILDING OFFICIAL, THE BUILDING OFFICIAL SHALL INSPECT THE PROJECT AT THE VARIOUS STAGES OF WORK REQUIRING APPROVAL TO DETERMINE THAT ADEQUATE CONTROL IS BEING EXERCISED BY THE PROFESSIONAL CONSULTANTS.
 - D. NOTIFICATION OF NONCOMPLIANCE, IF, IN THE COURSE OF FULFILLING THEIR RESPECTIVE DUTIES UNDER THIS CHAPTER, THE CIVIL ENGINEER, THE SOILS ENGINEER OR THE ENGINEERING GEOLOGIST FINDS THAT THE WORK IS NOT BEING DONE IN CONFORMANCE WITH THIS CHAPTER OR THE APPROVED GRADING PLANS, THE DISCREPANCIES SHALL BE REPORTED IMMEDIATELY IN WRITING TO THE PERMITTEE AND TO THE BUILDING OFFICIAL.
 - E. TRANSFER OF RESPONSIBILITY, IF THE CIVIL ENGINEER, THE SOILS ENGINEER, OR THE ENGINEERING GEOLOGIST OF RECORD IS CHANGED DURING GRADING, THE WORK SHALL BE STOPPED UNTIL THE REPLACEMENT HAS AGREED IN WRITING TO ACCEPT THEIR RESPONSIBILITY WITHIN THE AREA OF TECHNICAL COMPETENCE FOR APPROVAL UPON COMPLETION OF THE WORK. IT SHALL BE THE DUTY OF THE PERMITTEE TO NOTIFY THE BUILDING OFFICIAL IN WRITING OF SUCH CHANGE PRIOR TO THE RE-COMMENCEMENT OF SUCH GRADING.
4. EROSION AND SEDIMENTATION CONTROL.
 - A. ADMINISTRATION
 - (1) THE EROSION AND SEDIMENT CONTROL PROVISIONS OF THIS SECTION SHALL BE APPLICABLE TO ALL FACILITIES AND ACTIVITIES UNDER THE SUPERVISION OF THE DIRECTOR OF THE DEPARTMENT OF PUBLIC WORKS.
 - (2) THE ADMINISTRATION OF THIS SECTION, AS IT AFFECTS COUNTY FACILITIES AND ACTIVITIES, IS THE RESPONSIBILITY OF THE DIRECTOR OF THE DEPARTMENT OF PUBLIC WORKS.
 - (3) THE ADMINISTRATION OF THIS SECTION AS IT AFFECTS OTHER BUILDING, GRADING AND RELATED ACTIVITIES IS THE RESPONSIBILITY OF THE CHIEF BUILDING OFFICIAL.
 - (4) ANY SOILS OR GEOLOGIC REPORTS PREPARED FOR ANY PROJECT WHERE A GRADING PERMIT IS SUBMITTED AS A PART OF A TENTATIVE SUBDIVISION MAP APPLICATION, OR RELATED ENVIRONMENTAL DOCUMENT, SHALL BE PLACED IN THE RECORDS OF THE CHIEF BUILDING OFFICIAL.
 - B. EROSION AND SEDIMENTATION CONTROL, THESE MINIMUM EROSION AND SEDIMENTATION CONTROL STANDARDS SHALL APPLY TO ALL PROJECTS REQUIRING BUILDING, GRADING, AND DEVELOPMENT PERMITS, AND COUNTY OF MENDOCINO PUBLIC WORKS ACTIVITIES, TO PREVENT SEDIMENTATION OR DAMAGE TO ONSITE AND OFFSITE PROPERTY. THESE STANDARDS SHALL BE INCORPORATED INTO THE PROJECT DESIGN AND SHALL BE ADHERED TO DURING PROJECT CONSTRUCTION.
 - (1) GENERAL GUIDELINES
 - (a) MINIMIZE SOIL EXPOSURE DURING THE RAINY SEASON BY PROPER TIMING OF GRADING AND CONSTRUCTION.
 - (b) RETAIN TREES AND NATURAL VEGETATION TO STABILIZE HILLSIDES, RETAIN MOISTURE, REDUCE EROSION, MINIMIZE SILTATION AND NUTRIENT RUNOFF AND PRESERVE SCENIC QUALITIES.
 - (c) VEGETATE AND MULCH DENUDATED AREAS TO PROTECT THEM FROM WINTER RAINS.
 - (d) DIVERT RUNOFF AWAY FROM STEEP, DENUDATED SLOPES OR OTHER CRITICAL AREAS WITH BARRIERS, BERMS, DITCHES OR OTHER FACILITIES.
 - (e) LIMIT CONSTRUCTION, CLEARING OF VEGETATION AND DISTURBANCE OF THE SOIL TO AREAS OF PROVEN STABILITY, MITIGATE GEOLOGIC HAZARDS AND ADVERSE SOIL CONDITIONS WHEN THEY ARE ENCOUNTERED.
 - (f) REDUCE SEDIMENT TRANSPORT OFF THE SITE TO THE MAXIMUM EXTENT FEASIBLE THROUGH THE USE OF BEST MANAGEMENT PRACTICES (BMPs).
 - (2) PROPOSE A NEW OR MODIFIED EROSION AND SEDIMENT CONTROL TECHNIQUE IF THE TECHNIQUE IS PREFERRED AND MEETS THE INTENT OF THESE REGULATIONS. OBTAIN APPROVAL FROM THE COUNTY PRIOR TO IMPLEMENTATION.
 - (3) CONDUCT FREQUENT SITE INSPECTIONS TO ENSURE THAT CONTROL MEASURES ARE WORKING PROPERLY AND TO CORRECT PROBLEMS AS NEEDED.
 - (4) EMPLOY OTHER MEANS OF EROSION AND SEDIMENT CONTROL, AS REQUIRED BY THE CHIEF BUILDING OFFICIAL OR DIRECTOR OF THE DEPARTMENT OF PUBLIC WORKS AS APPLICABLE.

- (5) USE SEDIMENT BASINS, SILT TRAPS, OR SIMILAR MEASURE TO RETAIN SEDIMENT TRANSPORTED BY RUNOFF WATER GUSTS.
 - (6) COLLECT AND DIRECT SURFACE RUNOFF AT NON-EROSIVE VELOCITIES TO THE COMMON NATURAL WATERCOURSE OF THE DRAINAGE AREA.
 - (7) AVOID CONCENTRATING SURFACE WATER ANYWHERE EXCEPT SWALES OR WATERCOURSES.
 - (8) PREVENT MUD FROM BEING TRACKED ONTO THE PUBLIC ROADWAY BY TRAVELING OVER A TEMPORARY GRAVEL CONSTRUCTION ENTRANCE OR WASHING OFF VEHICLE TIRES BEFORE ENTERING A PUBLIC OR PRIVATE DRIVEWAY.
- (2) SEDIMENT CONTROL**
- (a) USE SEDIMENT BASINS, SILT TRAPS, OR SIMILAR MEASURE TO RETAIN SEDIMENT TRANSPORTED BY RUNOFF WATER GUSTS.
 - (b) COLLECT AND DIRECT SURFACE RUNOFF AT NON-EROSIVE VELOCITIES TO THE COMMON NATURAL WATERCOURSE OF THE DRAINAGE AREA.
 - (c) AVOID CONCENTRATING SURFACE WATER ANYWHERE EXCEPT SWALES OR WATERCOURSES.
 - (d) PREVENT MUD FROM BEING TRACKED ONTO THE PUBLIC ROADWAY BY TRAVELING OVER A TEMPORARY GRAVEL CONSTRUCTION ENTRANCE OR WASHING OFF VEHICLE TIRES BEFORE ENTERING A PUBLIC OR PRIVATE DRIVEWAY.
- (3) SLOPE CONSTRUCTION**
- (a) MINIMIZE LENGTH AND STEEPNESS OF SLOPES BY BENCHING, TERRACING OR CONSTRUCTING DIVERSION STRUCTURES.
 - (b) PRESERVE, MATCH, OR BLEND CUTS AND FILLS WITH THE NATURAL CONTOURS AND UNDULATIONS OF THE LAND.
 - (c) ROUND SHARP ANGLES AT THE TOP AND SIDES OF CUT AND FILL SLOPES.
 - (d) MAINTAIN CUT AND FILL SLOPES AT LESS THAN TWO-TO-ONE (2:1, RUN:RISE) SLOPE UNLESS A GEOLOGICAL AND ENGINEERING ANALYSIS INDICATES THAT STEEPER SLOPES ARE SAFE AND EROSION AND SEDIMENT CONTROL MEASURES CAN SUCCESSFULLY PREVENT EROSION.
- (4) PROTECTION OF WATERCOURSES AND DRAINAGE INLETS**
- (a) PREPARE DRAINAGEWAYS TO HANDLE CONCENTRATED OR INCREASED RUNOFF FROM DISTURBED AREAS BY USING APPROPRIATE LINING MATERIALS OR ENERGY ABSORBING DEVICES TO REDUCE THE VELOCITY OF RUNOFF WATER.
 - (b) TRAP SEDIMENT-LADEN RUNOFF IN BASINS TO ALLOW SOIL PARTICLES TO SETTLE OUT BEFORE FLOWS ARE RELEASED TO RECEIVING WATERS, STORM DRAINS, STREETS OR ADJACENT PROPERTY. THIS STANDARD IS NOT MANDATORY FOR GRADING THE SITE IS FULLY WINTERIZED AND STABILIZED PRIOR TO AND WORK CONDUCTED BETWEEN APRIL 15 AND OCTOBER 15. REMOVE TRAPPED SEDIMENT TO A SUITABLE LOCATION ON-SITE OR AT A DISPOSAL SITE APPROVED BY THE COUNTY.
 - (c) DO NOT GRADE OR DRIVE EQUIPMENT IN A STREAMSIDE MANAGEMENT OR OTHER WET AREAS EXCEPT AS ALLOWED THROUGH THE COUNTY STREAMSIDE MANAGEMENT AREA ORDINANCE.
 - (d) DEPOSIT OR STORE EXCAVATED MATERIALS AWAY FROM WATERCOURSES.
 - (e) PROTECT ALL EXISTING OR NEWLY INSTALLED STORM DRAINAGE STRUCTURES FROM SEDIMENT CLOGGING.
 - (f) USE STRAW BALES, FILTER FABRIC WRAPS AND DRAINAGE INLET PROTECTIONS IN A MANNER THAT DOES NOT CAUSE ADDITIONAL EROSION OR FLOODING OF A ROADWAY.
- (5) DISPOSAL OF EXCAVATED MATERIALS**
- (a) STOCKPILE TOPSOIL ON THE SITE FOR USE ON AREAS TO BE REVEGETATED.
 - (b) PLACE STOCKPILED SOIL IN LOCATIONS, SO THAT IF EROSION OCCURS, IT WILL NOT CONTRIBUTE TO OFFSITE SEDIMENT DISCHARGE.
 - (c) PROTECT STOCKPILED SOIL PROMPTLY THROUGH THE USE OF APPROPRIATE RUMPS TO REDUCE THE RISK OF EROSION AND SEDIMENT TRANSPORT. APPLY MULCH OR OTHER PROTECTIVE COVERINGS ON STOCKPILED MATERIAL THAT WILL BE EXPOSED THROUGH THE WINTER SEASON.
 - (d) DISPOSE OF EXCAVATED MATERIAL, NOT USED AT THE SITE AT A LOCATION APPROVED BY THE COUNTY.
- (6) DUST CONTROL**
- (a) ALL CONSTRUCTION AREAS, INCLUDING DISPOSAL SITES, SHALL BE TREATED AND MAINTAINED AS NECESSARY TO MINIMIZE THE EMISSION OF DUST. MAINTENANCE SHALL BE CONDUCTED AS NECESSARY TO PREVENT A NUISANCE TO OFFSITE PROPERTIES.
 - (b) ALL CONSTRUCTION SITES, INCLUDING DRIVEWAYS, SHALL BE MAINTAINED AS NECESSARY TO MINIMIZE THE EMISSION OF DUST AND PREVENT THE CREATION OF A NUISANCE TO ADJACENT PROPERTIES.
- (7) REVEGETATION**
- (a) APPLY TEMPORARY SEEDING AND MULCHING TO DENUDATED AREAS PRIOR TO OCTOBER 15 UNLESS THE PROJECT IS CONDITIONED OTHERWISE.
 - (b) ESTABLISH A PERMANENT VEGETATIVE COVER ON DENUDATED AREAS NOT OTHERWISE STABILIZED. PERMANENT VEGETATION GROUND COVER MUST CONTROL SOIL EROSION SATISFACTORILY AND SURVIVE SEVERE WEATHER CONDITIONS.
 - (c) RETAIN A VEGETATIVE BARRIER WHENEVER POSSIBLE AROUND PROPERTY BOUNDARIES.
 - (d) USE SELF-SUSTAINING, NON-INVASIVE PLANTS THAT REQUIRE LITTLE OR NO MAINTENANCE AND DO NOT CREATE AN EXTREME FIRE HAZARD.
 - (e) USE NATIVE PLANT SPECIES WHENEVER FEASIBLE.

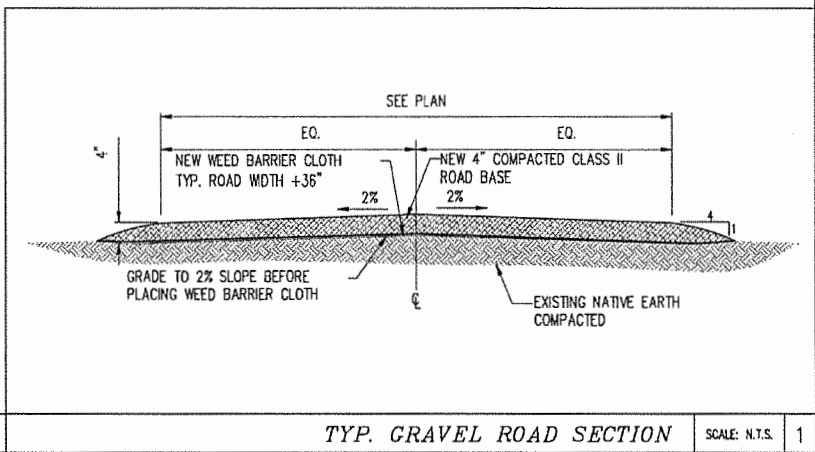

PROPRIETARY INFORMATION
 THE INFORMATION CONTAINED IN THIS SET OF DRAWINGS IS PROPRIETARY BY NATURE. ANY USE OR DISCLOSURE OTHER THAN THAT WHICH RELATES TO PEAK SITE-CCM IS STRICTLY PROHIBITED




PROJECT INFORMATION:
GOLD HILL
 6812 GOES WAY
 LOTUS, CA 95651

REV.	DATE	DESCRIPTION	BY
1	8-5-17	80% ZONING DOCUMENTS	AMP
1	8-3-17	65% ZONING DOCUMENTS	ALP
2	8-9-17	100% ZONING DOCUMENTS	ALP

COORDINATING ENGINEER:
Peek Site-Com
 12852 Earhart Ave. Suite 101
 Auburn, California 95602
 Phone (530) 885-6160
 E-Mail info@peeksitcom.com



SITE # : CVL03054
 CHK : AMP
 DRAWN BY :
 SHEET TITLE: **GRADING NOTES & DETAILS**
 SHEET NUMBER: **C-3** REVISION: **0**

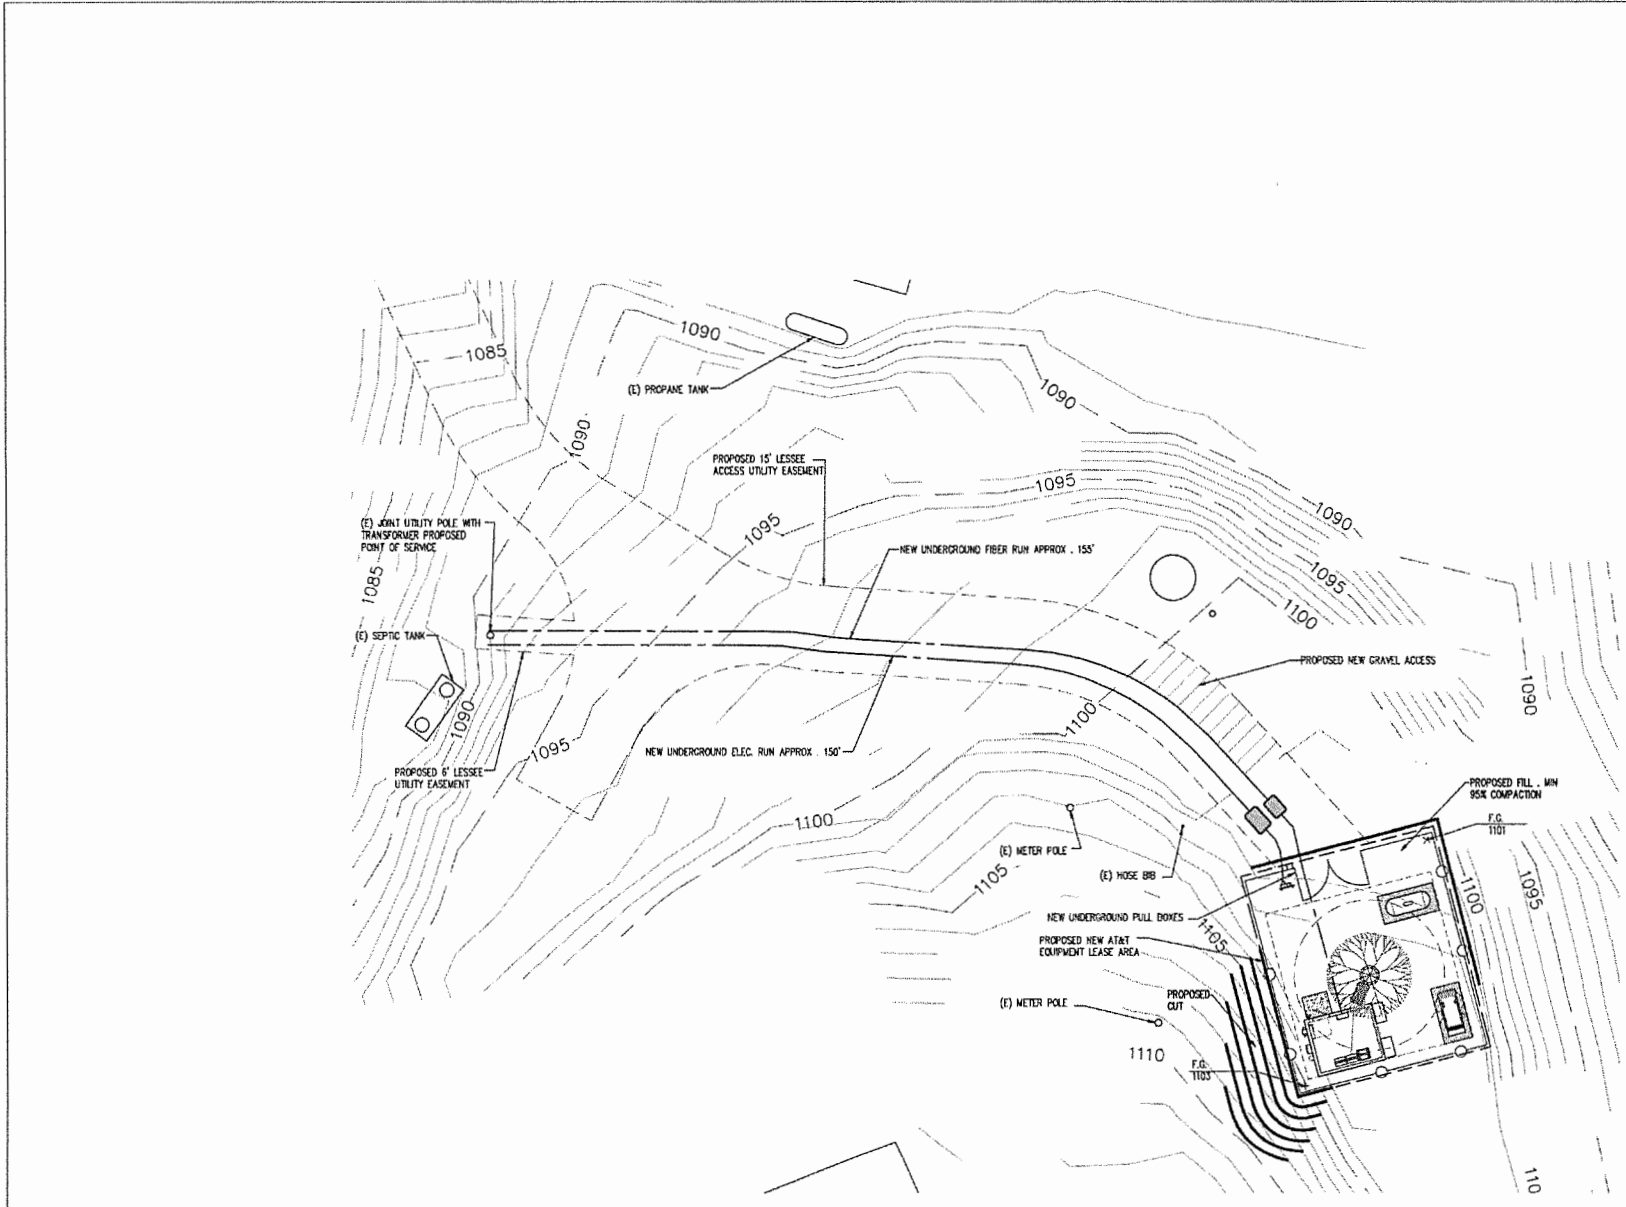

PROPRIETARY INFORMATION
 THE INFORMATION CONTAINED IN THIS SET OF DRAWINGS IS PROPRIETARY BY NATURE. ANY USE OR DISCLOSURE OTHER THAN THAT WHICH RELATES TO PEAK SITE-CDM IS STRICTLY PROHIBITED

CLIENT:



2600 CAMINO RAMON
 SAN RAMON, CA 94583

PROJECT INFORMATION:


GOLD HILL
 4812 ODES WAY
 LOTUS, CA 95651

REV.	DATE	DESCRIPTION	BY
1	6-5-17	90% ZONING DOCUMENTS	AMP
1	8-3-17	95% ZONING DOCUMENTS	ALP
2	8-9-17	100% ZONING DOCUMENTS	ALP

COORDINATING ENGINEER:

Seal of Peek Site-Com

12852 Earhart Ave. Suite 101
 Auburn, California 95602
 Phone (530) 885-6160
 E-Mail info@peaksitecom.com



SITE # CVL030254 CHK. DRAWN BY: AMP

SHEET TITLE: **GRADING PLAN**

SHEET NUMBER: **C-4** REVISION: **0**

RF SCHEDULE

SECTOR/POS	ANTENNA MODEL	RAD CENTER	PHYSICAL AZIMUTH	RRU	TMA	FIBER LENGTH	COAX LENGTH	COAX DIA.	NO
A/1	OS6656-3	± 110'	90°	(1) RRU5-11 & (1) RRU5-32 B2	N/A	± 150'	± N/A	N/A	-
A/2	OS6656-3	± 110'	90°	(1) RRU5-11	N/A	± 150'	± N/A	N/A	-
A/3	HBSAM65R-KU-H6	± 100'	90°	(1) RRU5-11 & (1) RRU5-32 B66	N/A	± 150'	± N/A	N/A	-
A/4	HBSAM65R-KU-H6	± 100'	90°	(1) RRU5-32 B30	N/A	± 150'	± N/A	N/A	-
B/1	OS6656-3	± 110'	330°	(1) RRU5-11 & (1) RRU5-32 B2	N/A	± 150'	± N/A	N/A	-
B/2	OS6656-3	± 110'	330°	(1) RRU5-11	N/A	± 150'	± N/A	N/A	-
B/3	HBSAM65R-KU-H6	± 100'	330°	(1) RRU5-11 & (1) RRU5-32 B66	N/A	± 150'	± N/A	N/A	-
B/4	HBSAM65R-KU-H6	± 100'	330°	(1) RRU5-32 B30	N/A	± 150'	± N/A	N/A	-
C/1	OS6656-3	± 110'	210°	(1) RRU5-11 & (1) RRU5-32 B2	N/A	± 150'	± N/A	N/A	-
C/2	OS6656-3	± 110'	210°	(1) RRU5-11	N/A	± 150'	± N/A	N/A	-
C/3	HBSAM65R-KU-H6	± 100'	210°	(1) RRU5-11 & (1) RRU5-32 B66	N/A	± 150'	± N/A	N/A	-
C/4	HBSAM65R-KU-H6	± 100'	210°	(1) RRU5-32 B30	N/A	± 150'	± N/A	N/A	-

RF SCHEDULE

SCALE: N.T.S. 1

PROPRIETARY INFORMATION
THE INFORMATION CONTAINED IN THIS SET OF DRAWINGS IS PROPRIETARY BY NATURE. ANY USE OR DISCLOSURE OTHER THAN THAT WHICH RELATES TO PEAK SITE-COM IS STRICTLY PROHIBITED



2500 CAMINO RAMON
SAN RAMON, CA 94583

PROJECT INFORMATION:

GOLD HILL

6812 GODES WAY
LOTUS, CA 95621

REV. DATE DESCRIPTION BY

REV.	DATE	DESCRIPTION	BY
1	6-5-17	50% ZONING DOCUMENTS	AHP
1	8-3-17	55% ZONING DOCUMENTS	ALP
2	8-9-17	100% ZONING DOCUMENTS	ALP

COORDINATING ENGINEER:

Peek Site-Com

12852 Earhart Ave. Suite 101
Auburn, California 95602
Phone (530) 885-6180
E-Mail info@peeksitecom.com

SEAL:



SITE # CHK. DRAWN BY:


CVL03054 AMP

SHEET TITLE:

ANTENNA PLAN & DETAILS


SHEET NUMBER: REVISION:

A-3 0

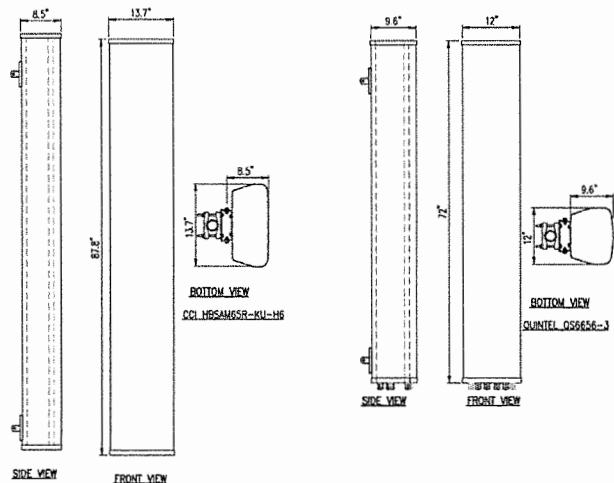

ANTENNA DETAIL

SCALE: N.T.S. 5

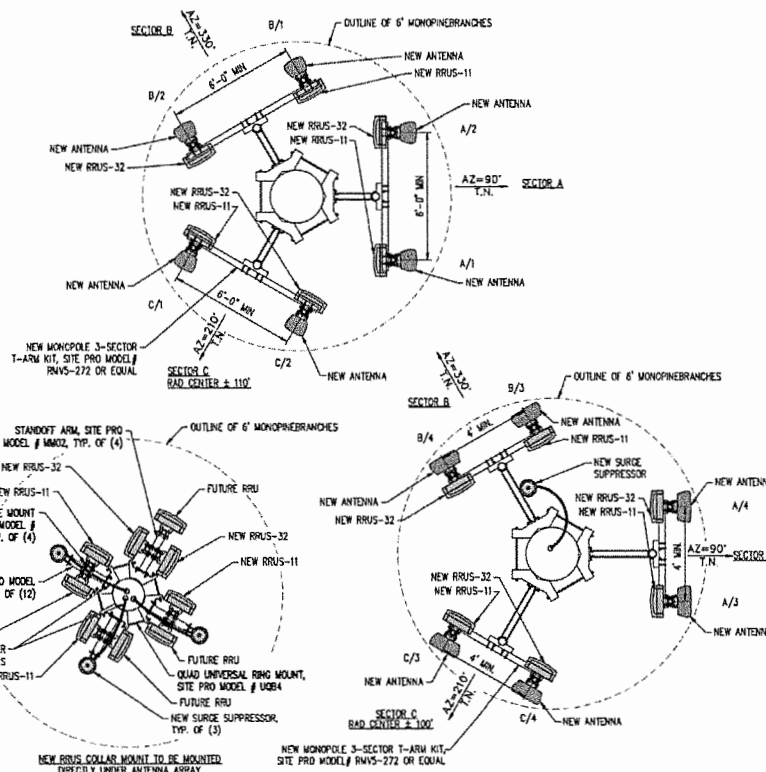

ANTENNA PLAN

SCALE: 3/8"=1'-0" 2

PROPRIETARY INFORMATION
 THE INFORMATION CONTAINED IN THIS SET OF DRAWINGS IS PROPRIETARY BY NATURE. ANY USE OR DISCLOSURE OTHER THAN THAT WHICH RELATES TO PEEK SITE-CDM IS STRICTLY PROHIBITED

CLIENT:


 2600 CAMINO RAMON
 SAN RAMON, CA 94583

PROJECT INFORMATION:
GOLD HILL
 6812 OODS WAY
 LOTUS, CA 95631



REV.	DATE	DESCRIPTION	BY
1	6-5-17	90% ZONING DOCUMENTS	AMP
1	8-3-17	95% ZONING DOCUMENTS	AMP
2	8-9-17	100% ZONING DOCUMENTS	AMP

COORDINATING ENGINEER:

Peek Site-Com
 12852 Earhart Ave., Suite 101
 Auburn, California 95602
 Phone (530) 885-6160
 E-Mail info@peeksitecom.com

SEAL:


SITE # _____ CHK. _____ DRAWN BY: _____
 CVL03054 ... AMP
 SHEET TITLE:
DETAILS
 SHEET NUMBER: _____ REVISION: _____
A-3.1 0

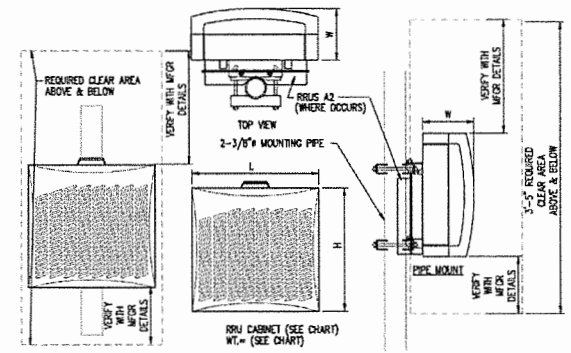

TYPE	LENGTH	HEIGHT	WIDTH	WEIGHT
RRU-11	17.8"	17.3"	7.19"	50 LBS
RRU-12	20.4"	18.5"	7.5"	50 LBS
RRU-13	29.9"	13.3"	9.5"	60 LBS
RRU-14	20.4"	18.5"	7.5"	50 LBS
A2	12.0"	15"	3.5"	21 LBS

NOTE: SEE RF SHEET FOR RRU PLACEMENT

SURGE SUPP. DETAIL

SCALE: N.T.S. 3

RRU DETAIL

SCALE: N.T.S. 4

PROPRIETARY INFORMATION
 THE INFORMATION CONTAINED IN THIS SET OF DRAWINGS IS PROPRIETARY BY NATURE. ANY USE OR DISCLOSURE OTHER THAN THAT WHICH RELATES TO PEAK SITE-COM IS STRICTLY PROHIBITED



2600 CAMINO RAMON
 SAN RAMON, CA 94583

PROJECT INFORMATION:

GOLD HILL
 6812 COOS WAY
 LOTUS, CA 95621

REV.	DATE	DESCRIPTION	BY
1	6-5-17	90% ZONING DOCUMENTS	AMP
1	8-3-17	50% ZONING DOCUMENTS	AMP
2	8-9-17	100% ZONING DOCUMENTS	AMP

COORDINATING ENGINEER:


Peek Site-Com
 12852 Earhart Ave, Suite 101
 Auburn, California 95602
 Phone (530) 885-6160
 E-Mail info@peaksitecom.com



SITE # CXL03054 CHK. DRAWN BY: AMP

SHEET TITLE: **ELEVATIONS**


SHEET NUMBER: **A-4** REVISION: **0**

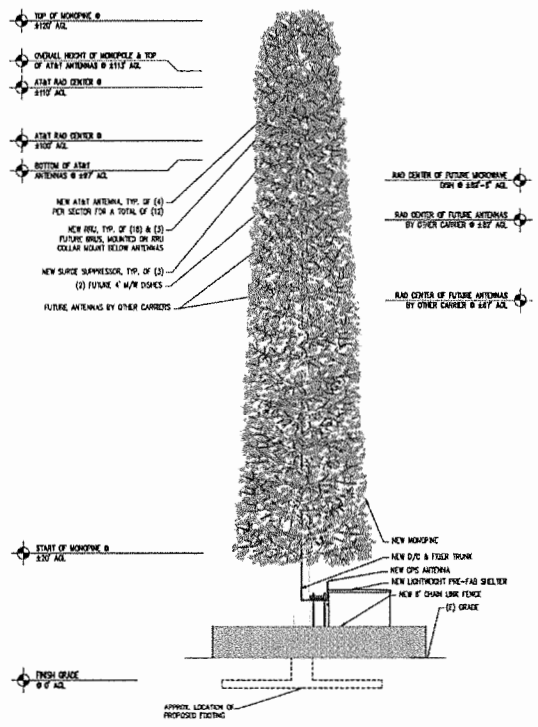

WEST ELEVATION

SCALE: 3/32"=1'-0"

2

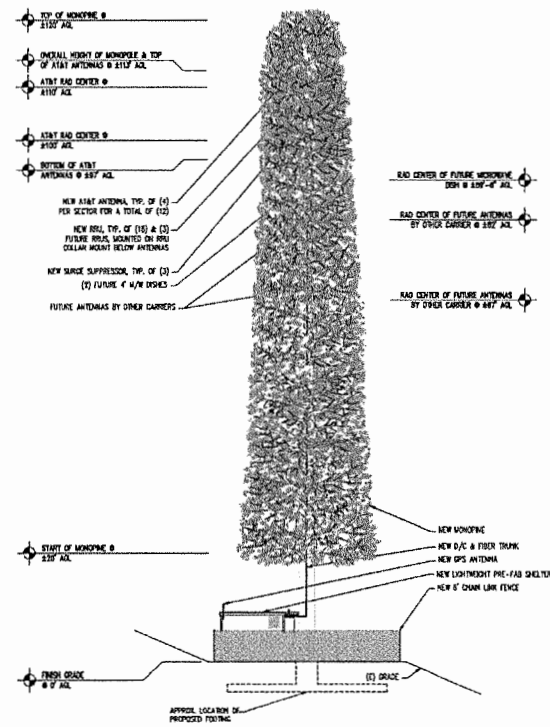

SOUTH ELEVATION

SCALE: 3/32"=1'-0"

1

- NOTE:
- MONOPOLE SHOWN ARE FOR ILLUSTRATIVE PURPOSES ONLY AND ARE NOT TO SCALE
 - TRUNK TO BE PAINTED RELIABLE WORK USE COOR. SHOWN OR EQUAL
 - ANTENNAS TO BE COINCIDENT WITH ANTENNAS SHOWN
 - TRUS TO BE PAINTED BROWN

PROPRIETARY INFORMATION
 THE INFORMATION CONTAINED IN THIS SET OF DRAWINGS IS PROPRIETARY BY NATURE. ANY USE OR DISCLOSURE OTHER THAN THAT WHICH RELATES TO PECK SITE-COM IS STRICTLY PROHIBITED

CLIENT:



2600 CAMINO RAMON
 SAN RAMON, CA 94583

PROJECT INFORMATION:

GOLD HILL
 4812 ODDS WAY
 LOTUS, CA 95621

REV	DATE	DESCRIPTION	BY
1	6-5-17	90% ZONING DOCUMENTS	AMP
1	8-3-17	95% ZONING DOCUMENTS	ALP
2	8-9-17	100% ZONING DOCUMENTS	ALP



COORDINATING ENGINEER:

Peek Site-Com
 12852 Earhart Ave., Suite 101
 Auburn, California 95602
 Phone (530) 835-6180
 E-Mail info@peeksilecom.com



SITE # _____ CHK. _____ DRAWN BY: _____
 CVL03054 _____ AMP _____
 SHEET TITLE: _____
ELEVATIONS
 SHEET NUMBER: _____ REVISION: _____

A-4.1 0

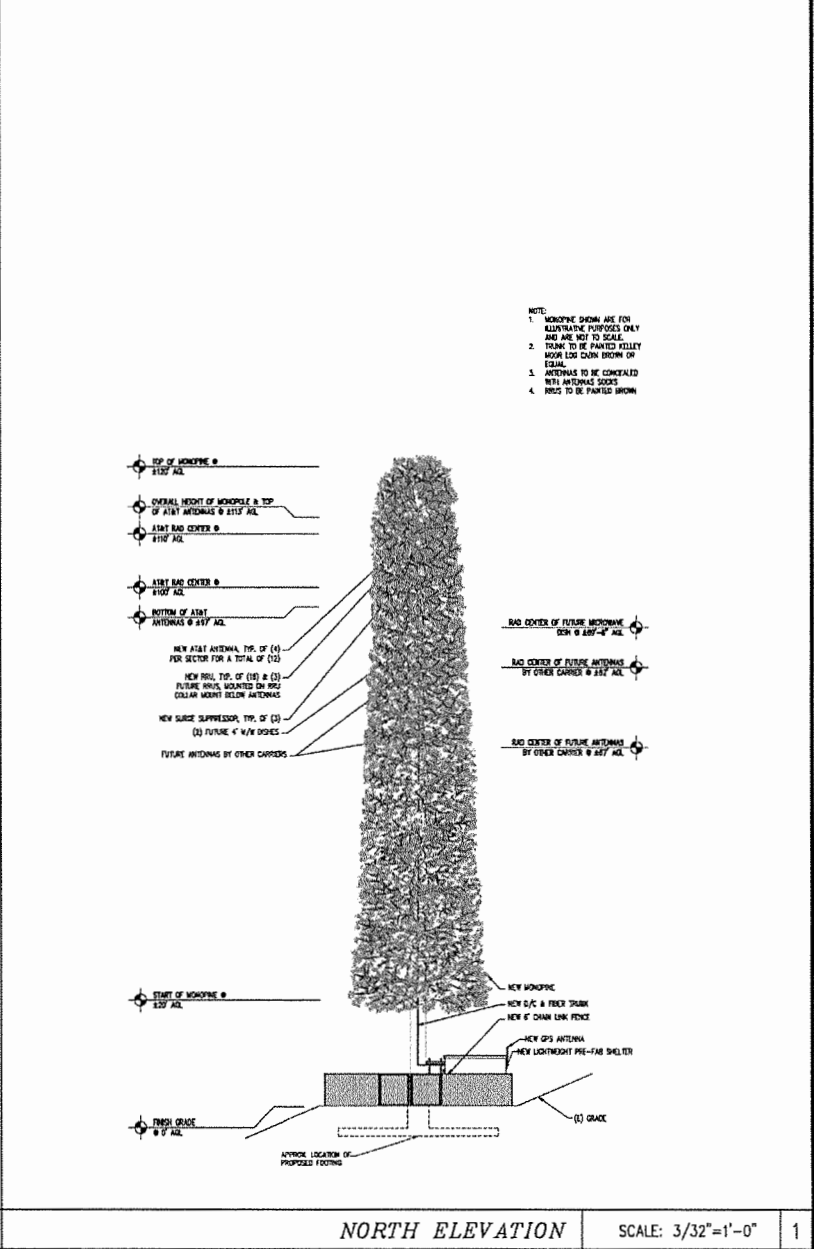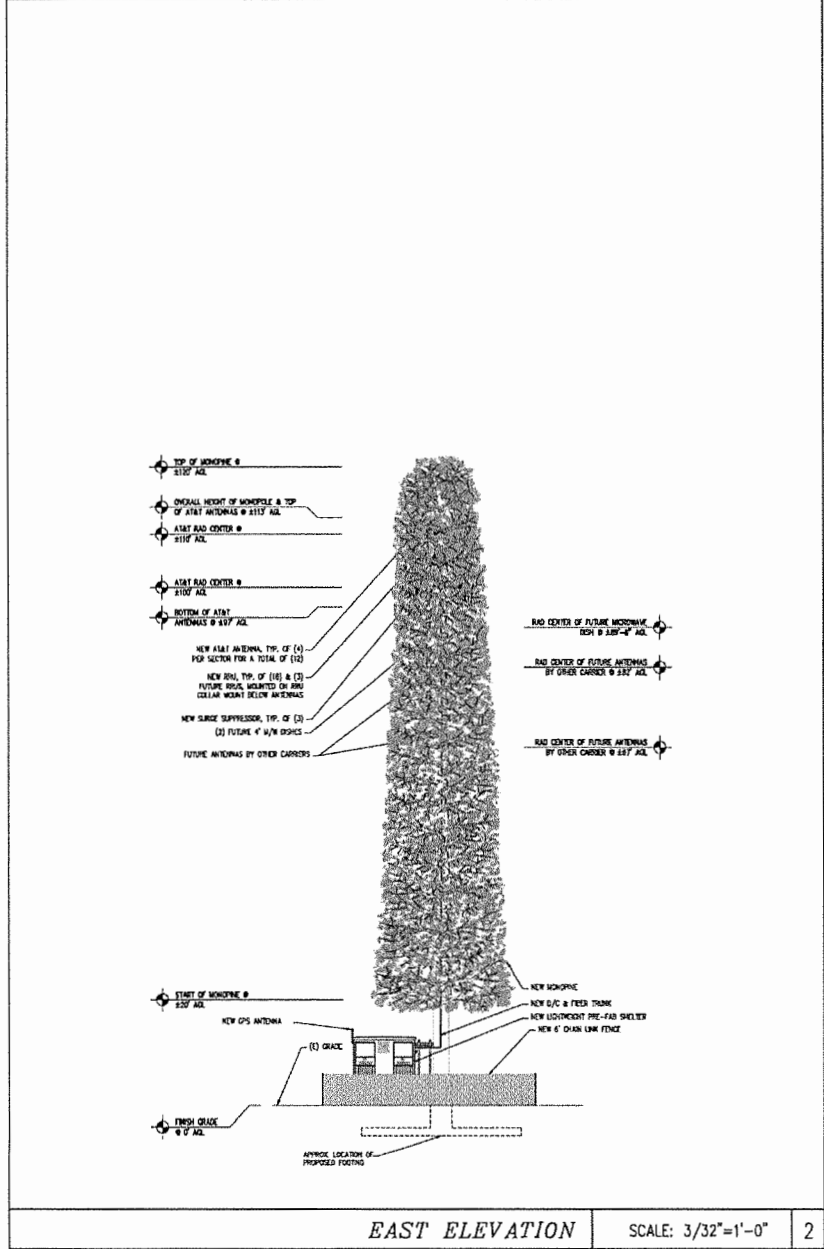

Existing



Proposed



view from El Campo Road looking west at site




*CVL02054 Gold Hill
6812 Gods Way, Lotus, CA
Photos Produced on 6-29-2017*

Existing



Proposed

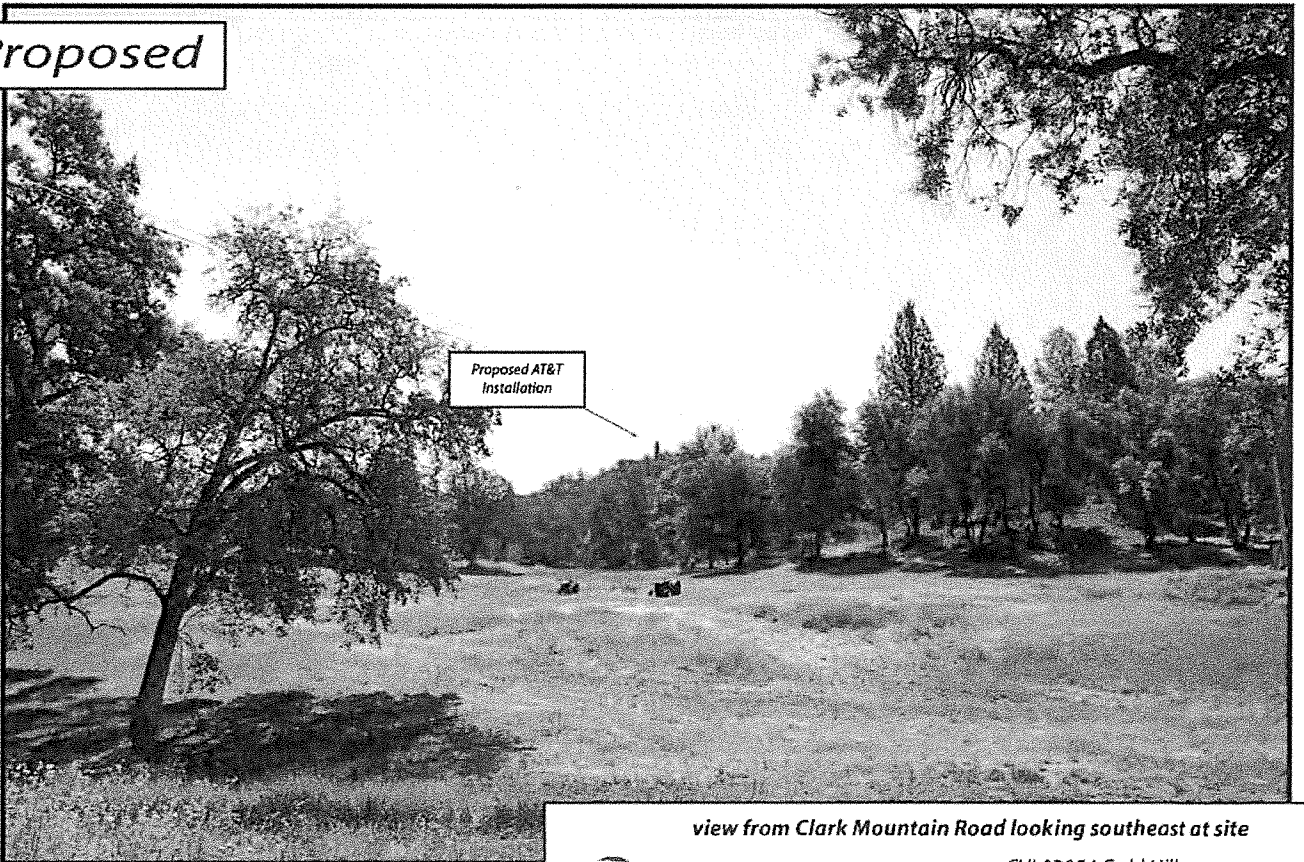

view from Clark Mountain Road looking southeast at site



AT&T Wireless

*CVL03054 Gold Hill
6812 Gods Way, Lotus, CA
Photosims Produced on 6-23-2017*

AdvanceSim
Photo Simulation Solutions
Contact (925) 202-8507

Existing



Proposed




view from Bass Road looking southwest at site

Existing



Proposed

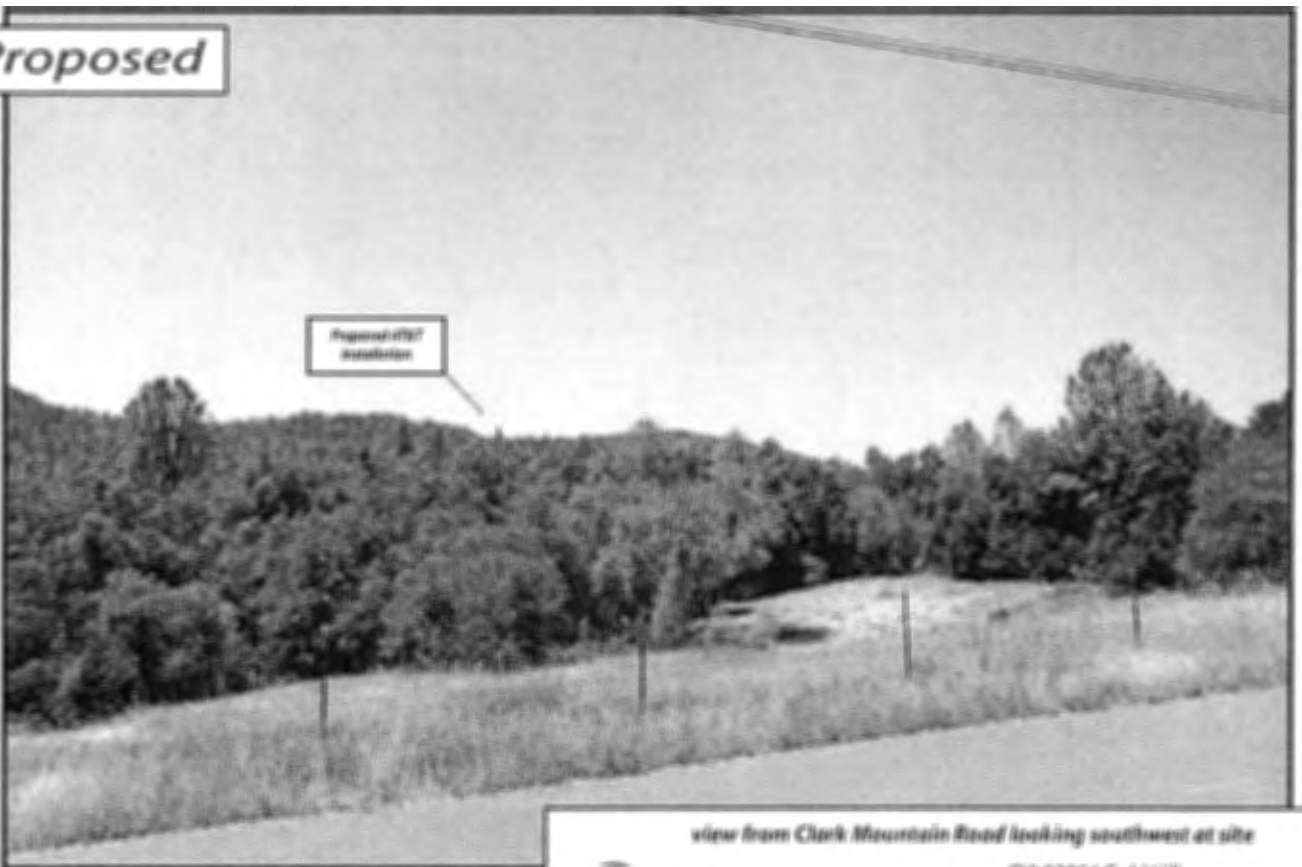

Proposed 450'
tower

view from Clark Mountain Road looking southwest at site


CVL03054 Zoning Propagation Map

June 13, 2017

ELDON COUNTY
Board of Supervisors
September 11, 2018
Roger Trent
SECRET

Exhibit H
Site 7 Gold Hill

Existing LTE 700 Coverage (RC = 108')

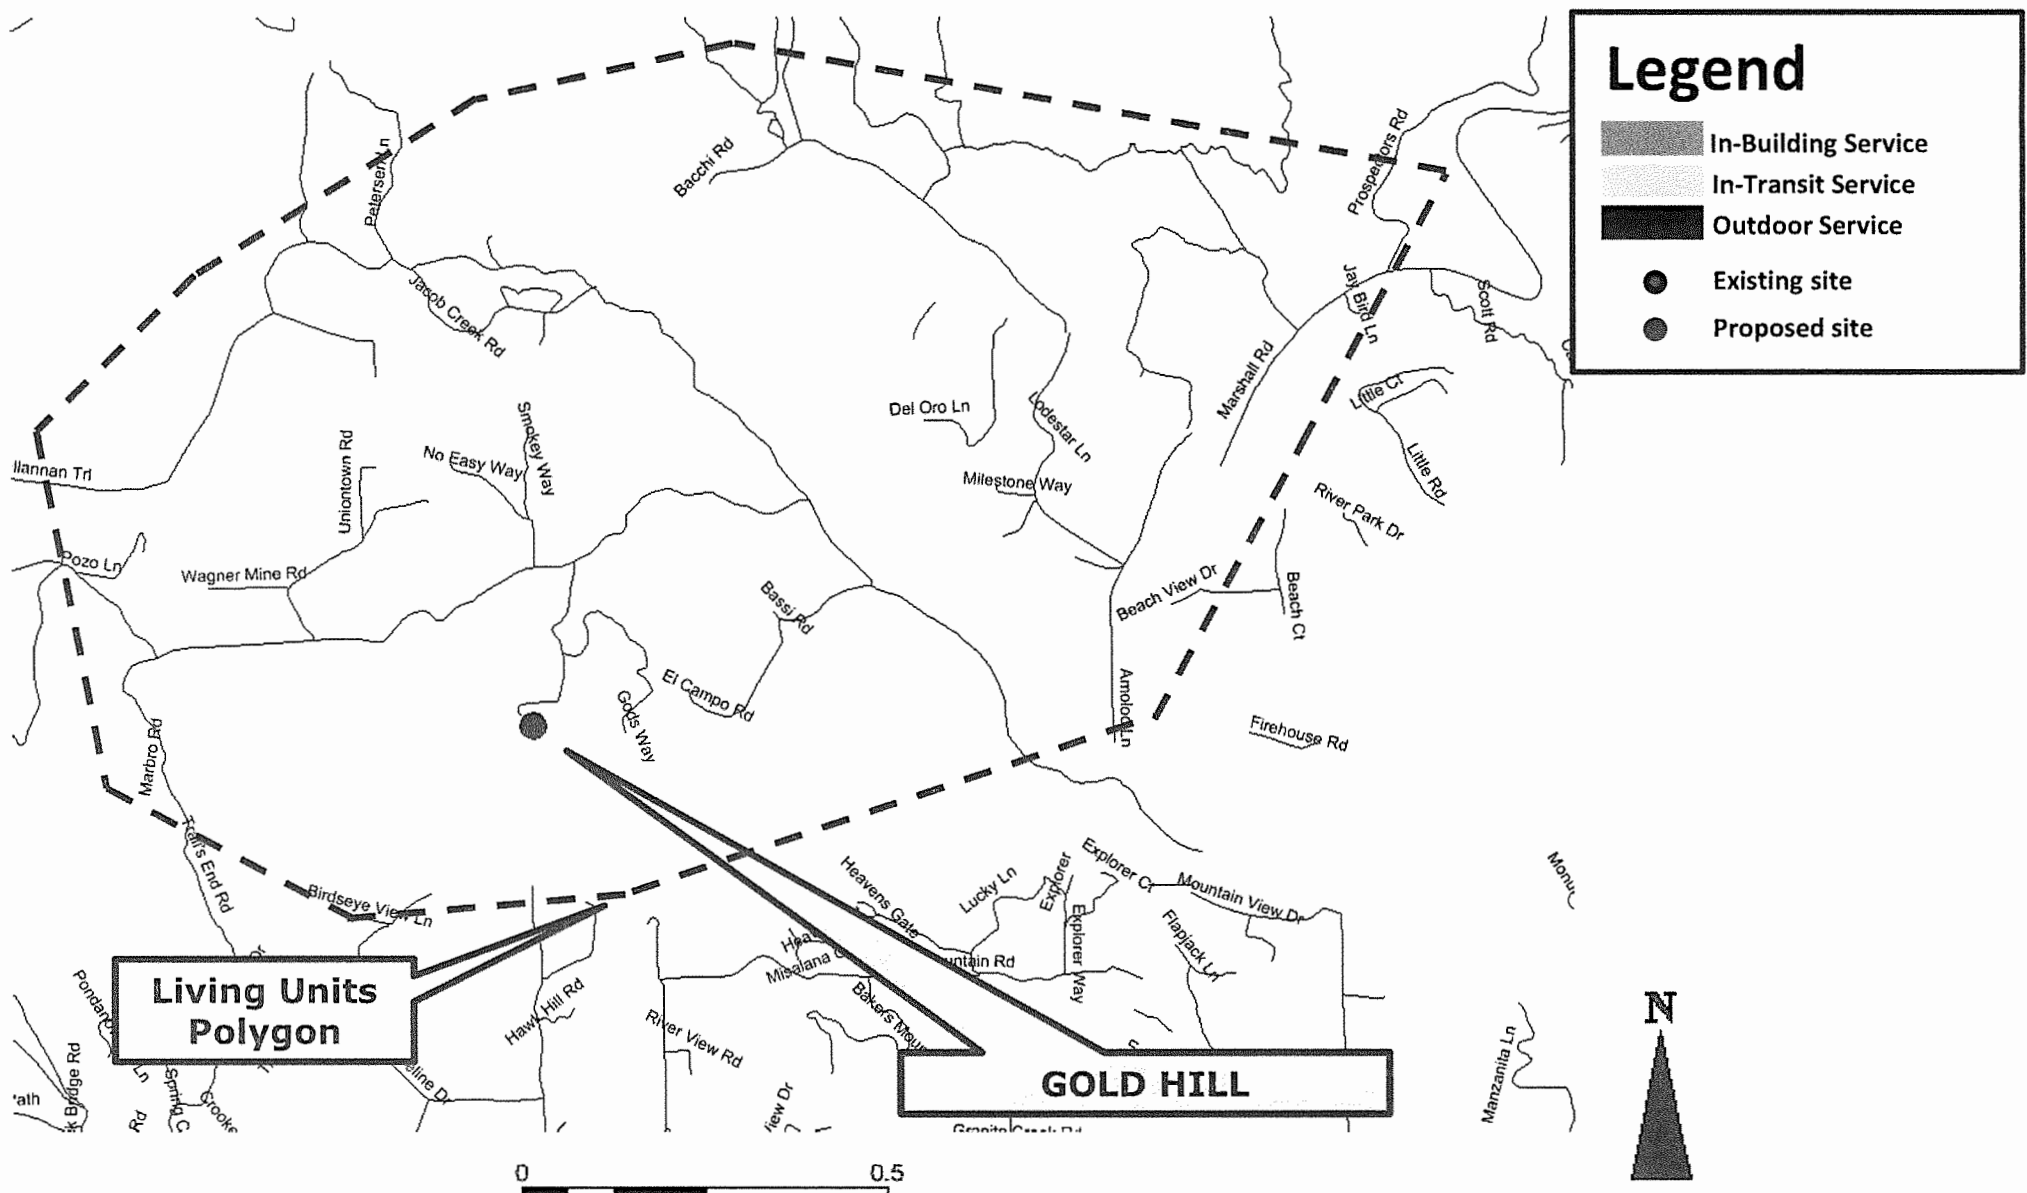

Legend

- In-Building Service
- In-Transit Service
- Outdoor Service
- Existing site
- Proposed site

Living Units Polygon

GOLD HILL




June 13, 2017

Scale: 1:17,690



Proposed LTE 700 Coverage (RC = 108')

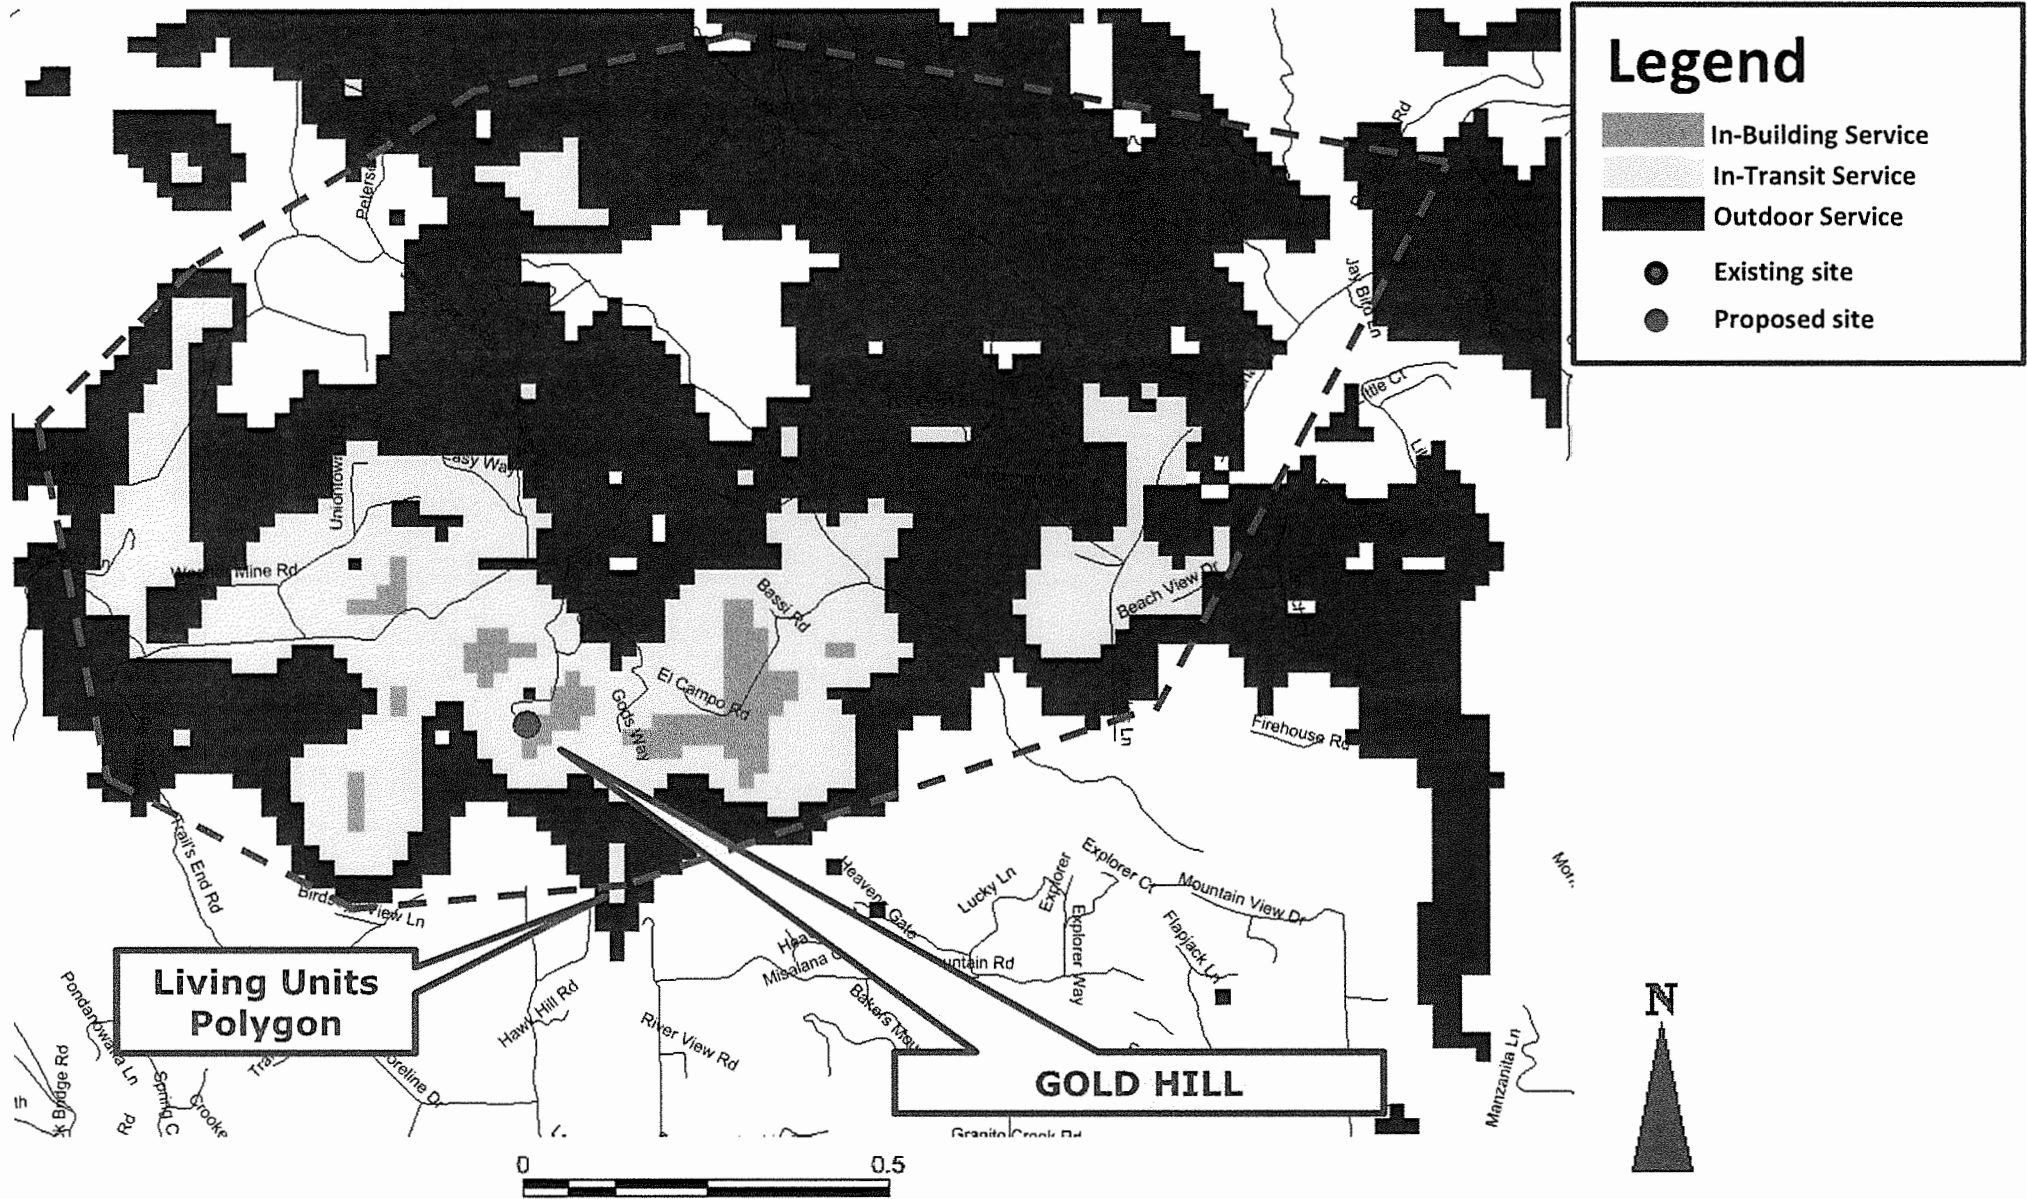

June 13, 2017



WATERFORD
COMPLIANCE...FROM START TO SIGNAL

Radio Frequency Emissions Compliance Report For AT&T Mobility

Site Name: Gold Hill	Site Structure Type: Monopine
Address: 6812 Gods Way Lotus, CA	Latitude: 38.802398
Report Date: August 17, 2017	Longitude: -120.937291
	Project: New Build

General Summary

AT&T Mobility has contracted Waterford Consultants, LLC to conduct a Radio Frequency Electromagnetic Compliance assessment of the proposed Gold Hill site located at 6812 Gods Way, Lotus, CA. This report contains information about the radio telecommunications equipment to be installed at this site and the surrounding environment with regard to RF Hazard compliance. This assessment is based on installation designs and operational parameters provided by AT&T Mobility.

The compliance framework is derived from the Federal Communications Commission (FCC) Rules and Regulations for preventing human exposure in excess of the applicable Maximum Permissible Exposure ("MPE") limits. At any location at this site, the power density resulting from each transmitter may be expressed as a percentage of the frequency-specific limits and added to determine if 100% of the exposure limit has been exceeded. The FCC Rules define two tiers of permissible exposure differentiated by the situation in which the exposure takes place and/or the status of the individuals who are subject to exposure. General Population / Uncontrolled exposure limits apply to those situations in which persons may not be aware of the presence of electromagnetic energy, where exposure is not employment-related, or where persons cannot exercise control over their exposure. Occupational / Controlled exposure limits apply to situations in which persons are exposed as a consequence of their employment, have been made fully aware of the potential for exposure, and can exercise control over their exposure. Based on the criteria for these classifications, the FCC General Population limit is considered to be a level that is safe for continuous exposure time. The FCC General Population limit is 5 times more restrictive than the Occupational limits.

Frequency (MHz)	Limits for General Population/ Uncontrolled Exposure		Limits for Occupational/ Controlled Exposure	
	Power Density (mW/cm ²)	Averaging Time (minutes)	Power Density (mW/cm ²)	Averaging Time (minutes)
30-300	0.2	30	1	6
300-1500	f/1500	30	f/300	6
1500-100,000	1.0	30	5.0	6

f=Frequency (MHz)

In situations where the predicted MPE exceeds the General Population threshold in an accessible area as a result of emissions from multiple transmitters, FCC licensees that contribute greater than 5% of the aggregate MPE share responsibility for mitigation.

Exhibit I Site 7 Gold Hill

APPROVED
EL DORADO COUNTY
PLANNING COMMISSION
Board of Supervisors
September 11, 2018
BY *Roger Trout*

Page 1

Based on the computational guidelines set forth in FCC OET Bulletin 65, Waterford Consultants, LLC has developed software to predict the overall Maximum Permissible Exposure possible at any particular location given the spatial orientation and operating parameters of multiple RF sources. These theoretical results represent worst-case predictions as emitters are assumed to be operating at 100% duty cycle.

For any area in excess of 100% General Population MPE, access controls with appropriate RF alerting signage must be put in place and maintained to restrict access to authorized personnel. Signage must be posted to be visible upon approach from any direction to provide notification of potential conditions within these areas. Subject to other site security requirements, occupational personnel should be trained in RF safety and equipped with personal protective equipment (e.g. RF personal monitor) designed for safe work in the vicinity of RF emitters. Controls such as physical barriers to entry imposed by locked doors, hatches and ladders or other access control mechanisms may be supplemented by alarms that alert the individual and notify site management of a breach in access control. Waterford Consultants, LLC recommends that any work activity in these designated areas or in front of any transmitting antennas be coordinated with all wireless tenants.

Analysis

AT&T Mobility proposes the following installation at this location:

- Install twelve (12) new panel antennas
- Install nine (9) new RRUS-11 Remote Radio Head units
- Install nine (9) new RRUS-32 Remote Radio Head units

The antennas will be mounted on a 113-foot monopole with centerlines at 100 and 110 feet above ground level. The antennas will be oriented toward 90, 330 and 210 degrees. The Effective Radiated Power (ERP) in any direction from all AT&T Mobility operations will not exceed 26,557 Watts. Other appurtenances such as GPS antennas, RRUs and hybrid cable are not sources of RF emissions. From this site, AT&T Mobility will enhance voice and data services to surrounding areas in licensed 700, 850, 1900, 2100 and 2300 MHz bands. No other antennas are known to be operating in the vicinity of this site.

Power density decreases significantly with distance from any antenna. The panel-type antennas to be employed at this site are highly directional by design and the orientation in azimuth and mounting elevation, as documented, serve to reduce the potential to exceed MPE limits at any location other than directly in front of the antennas. For accessible areas at ground level, the maximum predicted power density level resulting from all AT&T Mobility operations is 0.5265% of the FCC General Population limits (0.1053% of the FCC Occupational limits). Incident at adjacent buildings depicted in Figure 1, the maximum predicted power density level resulting from all AT&T Mobility operations is 0.6315% of the FCC General Population limits (0.1263% of the FCC Occupational limits). The proposed operation will not expose members of the General Public to hazardous levels of RF energy.

Waterford Consultants, LLC recommends posting contact information signage at the gate that informs personnel entering the site of basic precautions to be followed when working around antennas. RF alerting signage (Warning) should be posted at the base of the proposed Monopole to inform authorized climbers of potential conditions near the antennas. These recommendations are depicted in Figure 2.

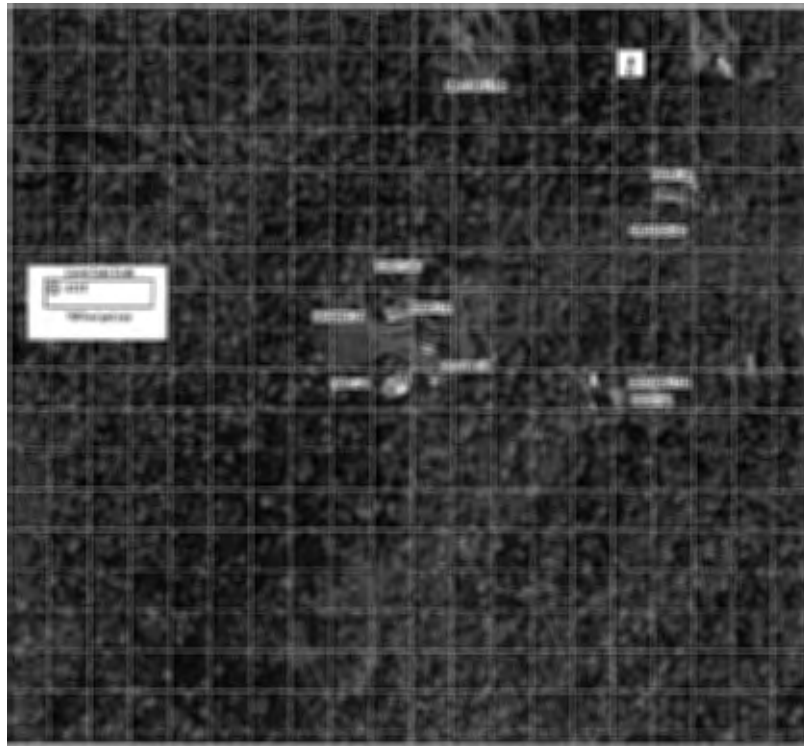


Figure 1: Antenna Locations

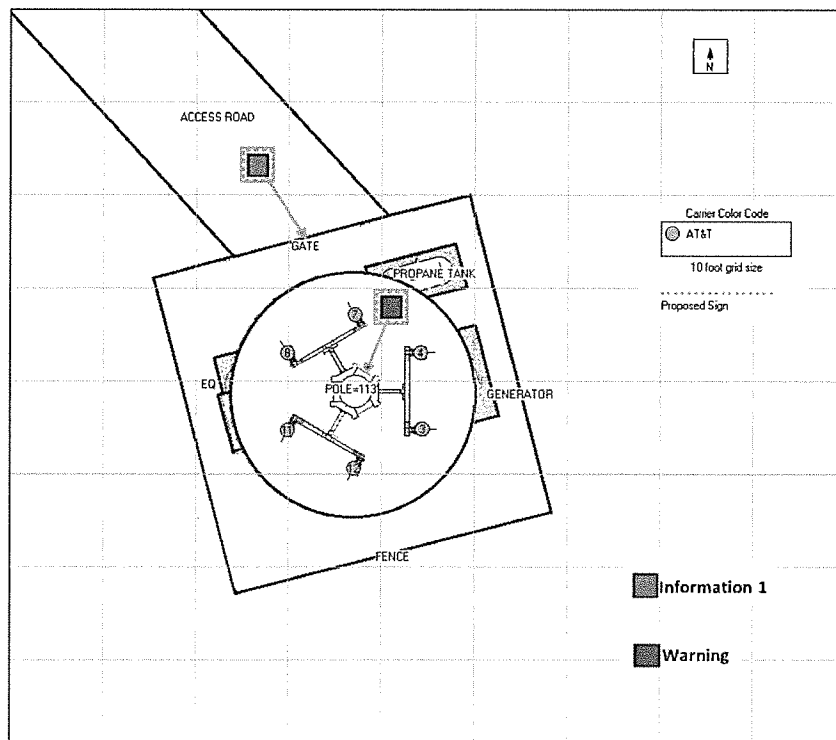


Figure 2: Mitigation Recommendations

Compliance Statement

Based on information provided by AT&T Mobility and predictive modeling, the installation proposed by AT&T Mobility at 6812 Gods Way, Lotus, CA will be compliant with Radiofrequency Radiation Exposure Limits of 47 C.F.R. § 1.1307(b)(3) and 1.1310. RF alerting signage and restricting access to the Monopine to authorized climbers that have completed RF safety training is required for Occupational environment compliance.

Certification

I, David H. Kiser, am the reviewer and approver of this report and am fully aware of and familiar with the Rules and Regulations of both the Federal Communications Commissions (FCC) and the Occupational Safety and Health Administration (OSHA) with regard to Human Exposure to Radio Frequency Radiation, specifically in accordance with FCC's OET Bulletin 65. I have reviewed this Radio Frequency Exposure Assessment report and believe it to be both true and accurate to the best of my knowledge.

